




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0412

ISSUED: 01-87

REVISED: 09 OCT 2019

RECESSED SHELF

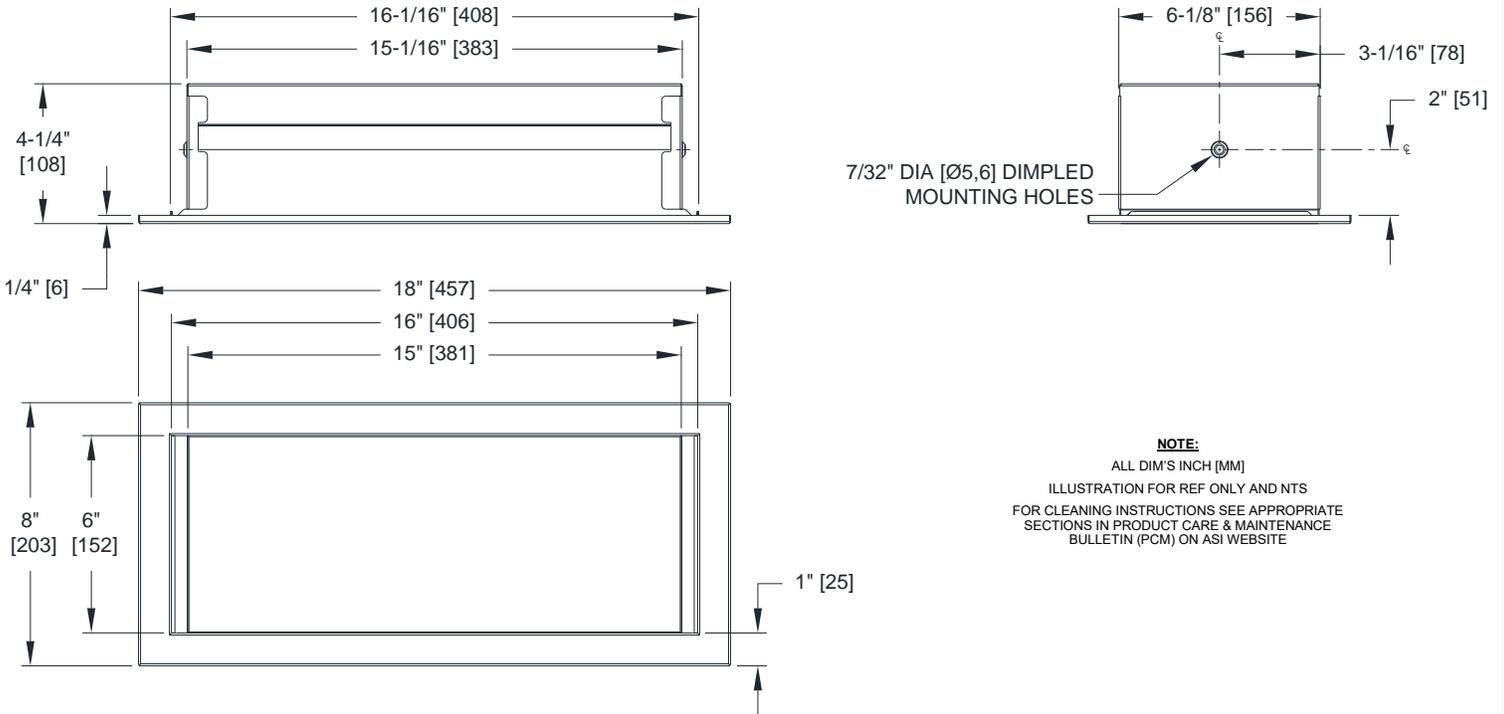

NOTE:
 ALL DIM'S INCH [MM]
 ILLUSTRATION FOR REF ONLY AND NTS
 FOR CLEANING INSTRUCTIONS SEE APPROPRIATE
 SECTIONS IN PRODUCT CARE & MAINTENANCE
 BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION

Recessed Shelf shall be 22 gauge type 304 stainless steel alloy 18-8. All exposed surface shall be satin finish and be protected during shipment with a PVC film easily removable after installation. Face trim shall be 1" [25,4] wide formed from one piece with no miters, welding or open seams and have a 1/4" [6,4] square return to wall. Not recommended for wet locations. Countersunk mounting holes shall be provided for №10 flat or oval-head screws (by others) in side walls. Structural assembly of all components shall be of welded construction.

Recessed Shelf shall be Model № 0412 as manufactured by American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913

INSTALLATION

Recess mount unit in wall using two (2) № 10 x 1-1/2" [M5 x 38] flat or oval-head self-threading screws (by others) through concealed dimpled mounting holes provided. Create Rough Wall Opening (RWO) 1/8" [3] larger than frame opening on sides and 1/4" [6,4] on top and bottom for leveling. Supply (by others) appropriate shims to accommodate side space for ramped entry side walls and to support sides when installed. For general usability install shelf 50" [1270] maximum above finished floor (AFF). For compliance with 2010 ADA Accessibility Standards, ANSI 117.1 and 2015 ABA Standards install unit so that top of shelf opening is 48" [1219] max AFF with clear floor reach access provided or 46" [1168] max AFF with side reach access provided over an obstruction (e.g.: vanity).

RWO: 16-5/16" [414] W x 6-5/8" [168] H x 4" [102] D minimum

OPERATION

Shelf is stationary after installation and has no moving parts. User manually places and retrieves items onto and from shelf. See PCM on ASI Website for Product Care, Cleaning & Maintenance.

OPTIONS

Shelf can be made in any length up to 84" [2134] OA maximum. Heights can be made up to 42" [1067] OA maximum. Indicate Length x Height (XX x YY) required in chart below for Model № 0412-M-XXYY:

Model № 0412-M-XXYY	Length:	XX =	Height:	YY =
---------------------	---------	------	---------	------