

Heater Proofers - Non-Insulated

100% Pre-Tested Electrical Assembly

Specifications:

- Heavy Duty, channel construction designed for durability. Easy to Clean.
- Air baffle and circulating air blower provide even heat distribution.
- 5" polyurethane plate casters for easy maneuverability and stability. Two locking casters in front.
- Easy dual proof/heat control: "Proof" mode: Humidity from 30% to 95%. Temperatures up to 115°F (46°C)
"Heat" mode: Nominal Temperatures up to 180°F (82°C)
- Corner bumpers provide protection to unit, associates and fixtures.
- Clear or solid door available. Extruded, anodized aluminum frame will not dull. A tight fit gasket is installed on inside door frame, held closed with magnets, Lexan fits tightly into door frame.
- Door lifts off for easy cleaning and accessibility.
- Control drawer is removable for quick and easy cleaning and maintenance.
- All controls are accessible without opening cabinet door.
- Easy to read LED thermometer.
- Pan Capacity: 36 - 18" x 26" pans

Electrical Specifications:

- 120 Volt-60 Cycle A.C.
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.



NHPL-1836



NHP-1836

Model Number	Ordering Number	Feature	Overall Dimensions						Approx. Ship Weight	
			Width		Length		Height			
			(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
NHP-1836	249113	Solid	21	533	30¾	781	68	1,727	235	106
NHPL-1836	230421	Clear								
NHPL-1836-CTL	250886	Clear, Reinforced Undercarrage								
Replacement Caster Information										
738A	128784	Swivel Plate Caster with 5" Polyurethane Wheel							—	
738ABK	204185	Swivel Plate Caster with 5" Polyurethane Wheel & Brake							—	
7112	122180	5" Polyurethane Wheel							—	

Freight Class: 125

Heater Proofer - Insulated

Specifications:



NHPL-1836-INS

- Heavy duty, tubular uprights, designed for durability.
- Air baffle and circulating air blower provides even heat distribution.
- Full length door handle convenient height for everyone.
- Removable heating console and door are easy to clean.
- Corner bumpers, provides protection to unit, associates and fixtures.
- Extruded anodized aluminum frames are non-warping and abuse-resistance, will not dull.
- Full perimeter magnetic door gasket seals and secures the door-saves energy and maintains the proper temperature and humidity to preserve the food's texture and flavor.
- .125" thick base and reinforced corner design assures durability and years of service.
- Heavy Duty 5" x 1¼" tread polyurethane plate caster with brakes allows for easy, smooth movement.

Heating/Proofing Console: Removable console consisting of a blower, thermometer, 2-way toggle switch, running lights to indicate heater (holding) or proofing mode, stainless steel water reservoir, 6' detachable cord and plug. 14 watt element controlled by a thermostat for heating (holding mode). 8 watt and 600 watt elements thermostatically controlled in proofing mode.

Dual Proof Control:

Proof Mode - humidity from 30% - 95% temps up to 115°F (46°C)
Heat Mode - normal temps up to 180°F (82°C)

Electrical: 120 volt, 60 cycle, single phase, 15 amp.

INSULATED HEATER PROOFER


Use in higher volume operations with more frequent serving applications (door openings), the insulated cabinet may be the best choice due to its faster recovery and greater consistency of temperature. The insulated cabinets are more energy-efficient and cost effective over the long term.

Model Number	Ordering Number	Feature	Overall Dimensions						Approx. Ship Weight	
			Width		Length		Height			
			(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
NHP-1836-INS	379831	Solid Door	21½	533	31¼	794	69½	1,795	170	77
NHPL-1836-INS	379858	Clear Door								
Replacement Caster Information										
738A	128784	Swivel Plate Caster with 5" Polyurethane Wheel							—	
738ABK	204185	Swivel Plate Caster with 5" Polyurethane Wheel & Brake							—	
7112	122180	5" Polyurethane Wheel							—	

Freight Class: 125

NHP & NHPL Drawer Assembly

**Drawer view from
upside down with
bottom cover
removed.**

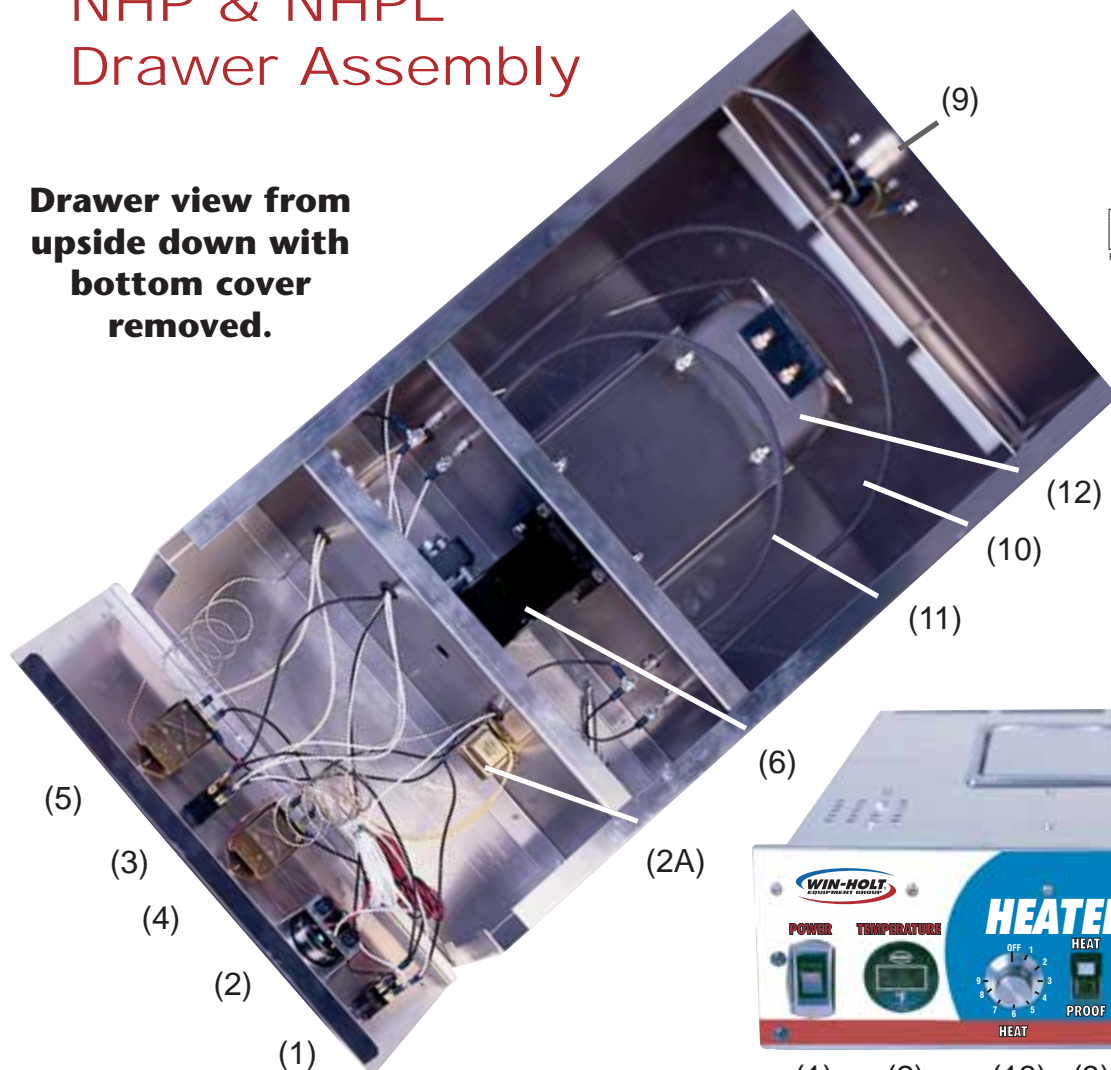

Model Number	Ordering Number	Part Location	Part Description
Cabinet Parts List			
H-103	123861	—	Cord Set
NHP-DR	251176	—	Replacement Door Solid Aluminum (NHP)
NHPL-DR	247505	—	Replacement Door Lexan (NHPL)
H-323-2	233656	—	Plastic Door Handle
Heater Drawer Parts List			
NHPL-PD-CH	595753	—	Replacement Drawer
H-106-2	232805	1	Main Power Switch
H-105	123887	2	L.E.D. Thermometer
		2A	Thermometer Transformer
H-106-1	232784	3	Heat/Proof Switch
H-220	170851	4	Thermostat (Heat)
		5	Thermostat (Proof)
H-225	170894	6	Blower and Motor Assembly
H-107	123908	9	Power Inlet
H-226	170907	10	900W Heater Element
H-227	170915	11	600W Heater Element
H-228	170923	12	600W Water Pan Heater Element
H-108	123916	13	Heat Control Knob
		14	Proofer Control Knob

**For technical
assistance
please contact
or e-mail:
engineer@winholt.com**

**For Service and Parts call:
1-800-444-3595**