

# ROYAL SERIES PLUMBING ADD-ON FAUCETS

MODEL: PROJECT: PROJECT: ITEM #: OTY:	MODEL:	PROJECT:	ITEM #:	QTY:	
---------------------------------------	--------	----------	---------	------	--

## **PRODUCT IMAGE**



21-139 SHOWN

ALSO AVAILABLE IN LOW LEAD BY ADDING "L" TO MODEL NUMBER

## STANDARD FEATURES

- Mounts on Pre-Rinse base with riser on top to allow Pre-Rinse to double as a faucet
- 1/4 turn high performance ceramic cartridge valve with built-in back flow preventer
- Heavy-Duty spout with double 0-Ring construction and welded shoulder for durability
- High precision machining and polished nickel chromium finish
- Full replacement parts available
- 1 Year Warranty
- Low Lead Compliance

"L" Models meet California AB-1953 and Vermont S152 standards (Faucet models already listed with the "L" suffix (i.e. 12-806L) are only available in Low Lead Compliant model)

## **SPECIFICATIONS**

- Mounts on 3/8" NPT male inlet, 3/8" NPT female outlet
- Temperature Range: 40°F to 180°F
- Flow rate: 2 GPM max
- Shipping weight: 2 lbs.



APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.



## ROYAL SERIES PLUMBING ADD-ON FAUCETS

MODEL:	PROJECT:	ITEM #:	QTY:

## **MODELS**


#### STANDARD SPOUTS

Model Numbers	Spout Size (A)	
21-138L	6"	
21-149L	8"	
21-139	12"	
21-140L	14"	
21-141L	16"	

NOTE: Add "L" to end of Model Number for Low Lead Model. Models already listed with the "L" are only available in Low Lead Compliant versions

ABCDEFGHU

### **DRAWING**

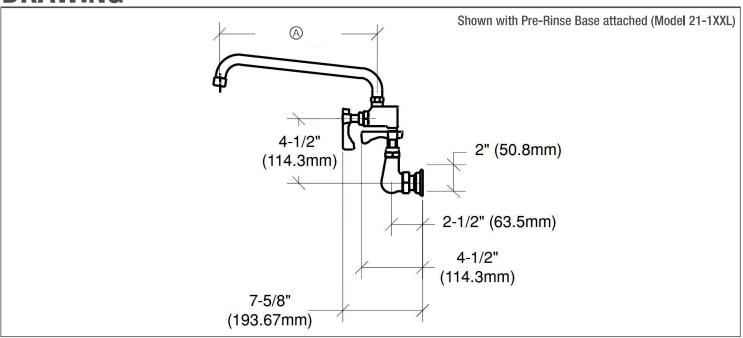



**APPROVED BY:** 

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Printed in the USA