



AERO 35

VACUUM PACKAGING MACHINE



FEATURES

- Standard with 1 seal bar (front): 13.5"
- Standard double seal (two wires).
- Optional without extra costs:
Cut-off/Wide seal
- Seal bar easily removable for cleaning and maintenance purposes
- Pump capacity: 8 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 25-60 sec
- Standard Sensor control with a 3-program memory
- Easy control interface
- Standard soft air
- Liquid control
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with insert plate for a faster cycle and product adjustment

DESCRIPTION

State of the art, innovative, robust machine with a slick design. Easy control interface. 3 adjustable setting programs. Standard Soft-air. Precise vacuum settings with sensor pressure control. This table-top model complies with CE/UL/ETL standards.


ACCESSORIES

- Inclined insert plate (for packing liquids)
- Food container adaptor
- Service kit for standard maintenance
- Trolley with shelf



Henkelman offers standard 3 year warranty

SEAL BAR CONFIGURATION

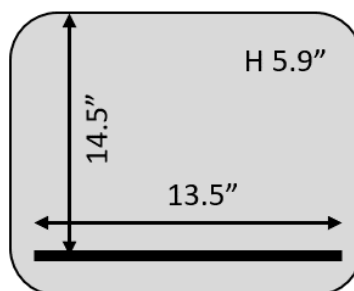

HENKELMAN USA
493 W. Fullerton Ave
Elmhurst, IL 60126
USA


Sales support
P +1 331-979-2013
E info@invacus.com
Service/technical support
P +1 331-979-2013
E info@invacus.com

VACUUM PACAGKING MACHINE

AERO 35 – SPECS

VACUUM PACKAGING MACHINE AERO 35 – SPEC SHEET

DIMENSIONS

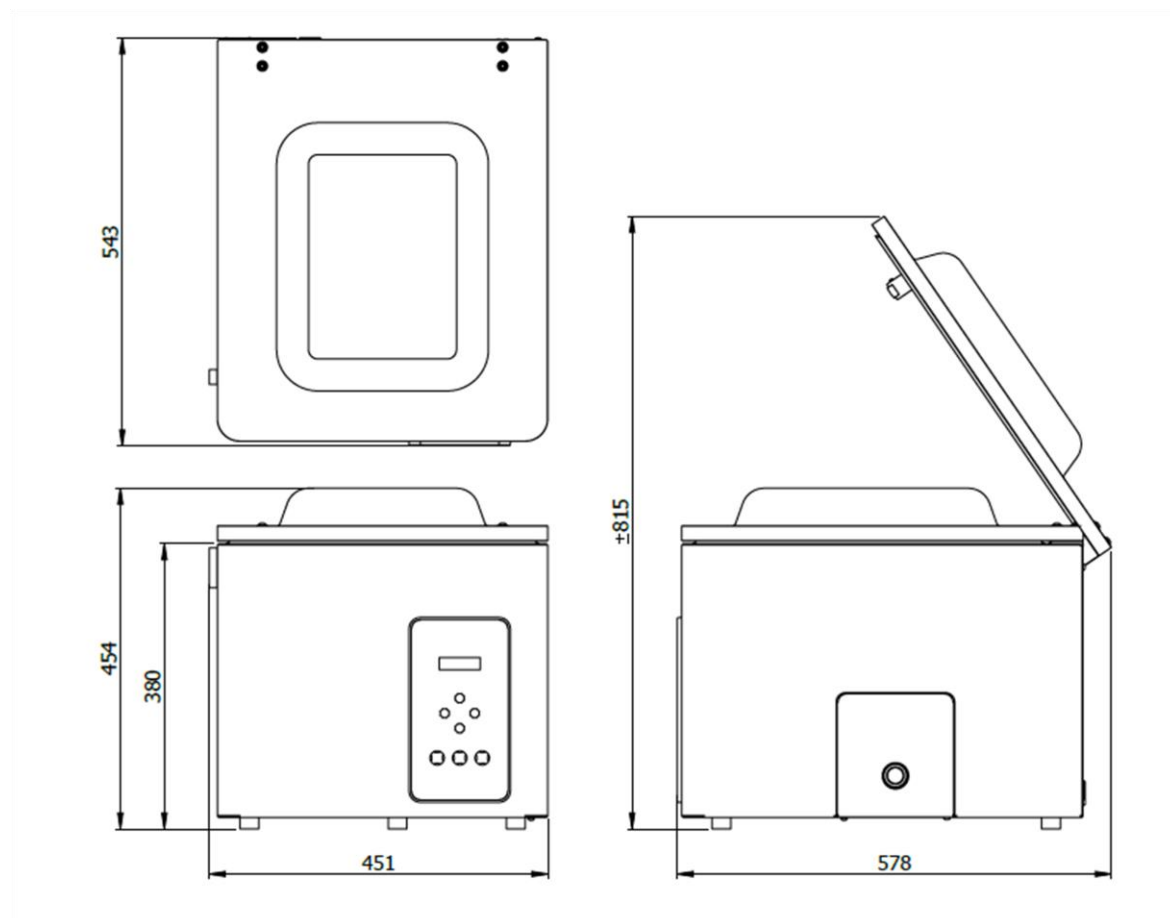

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m³/h)	Power (HP)	Weight (LB)
	Chamber (usable space) L x W x H	Machine L x W x H				
AERO 35	14.5" x 13.7" x 5.9"	21.4" x 17.7" x 17.9"	110V-1-60	8	0.70	79.3
6 Amp Plug: NEMA 5-15						



HENKELMAN USA
 493 W. Fullerton Ave
 Elmhurst, IL 60126
 USA

Sales support
 P +1 331-979-2013
 E info@invacus.com
Service/technical support
 P +1 331-979-2013
 E info@invacus.com