

AERO 42XLII

VACUUM PACKAGING MACHINE



DESCRIPTION

State of the art, innovative, robust machine with a slick design. Easy control interface. 3 adjustable setting programs. Standard Soft-air. Precise vacuum settings with sensor pressure control. This table-top model complies with CE/UL/ETL standards..

FEATURES


- Standard with 2 x seal bar (front): 16.5 each
- Standard double seal (two wires). Optional without extra costs: Cut-off/Wide seal
- Seal bars easily removable for cleaning and maintenance purposes
- Pump capacity: 16 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 20-40 sec
- Standard Sensor control with a 3-program memory
- Easy control interface
- Standard soft air
- Liquid Control
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with insert plate for a faster cycle and product adjustment

ACCESSORIES

- Inclined insert plate (for packing liquids)
- Food container adaptor
- Service kit for standard maintenance
- Trolley with shelf




SEAL BAR CONFIGURATION

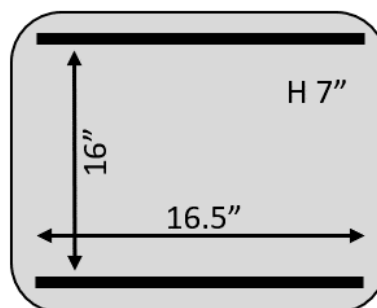

VACUUM PACAGKING MACHINE AERO 42XLII – SPECS

VACUUM PACKAGING MACHINE AERO 42XLII – SPEC SHEET

DIMENSIONS

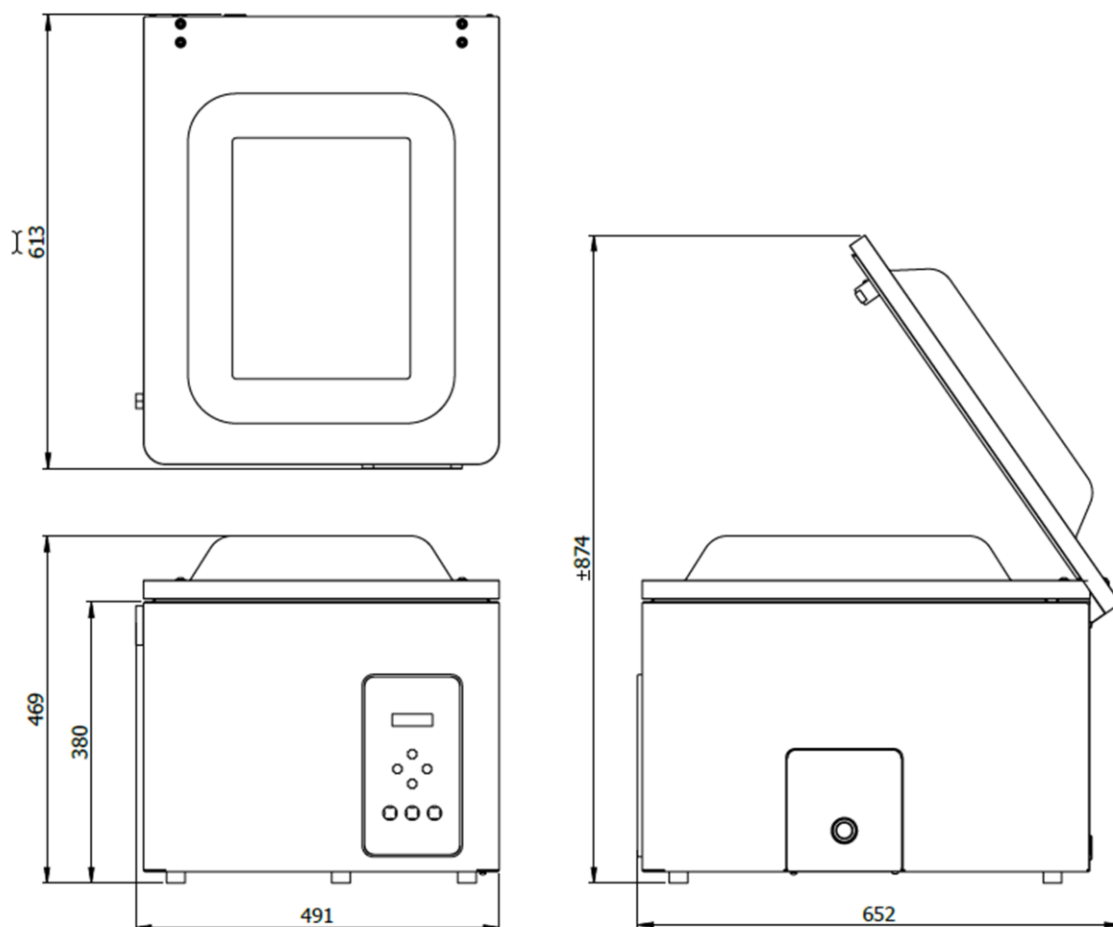

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m ³ /h)	Power (HP)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
AERO 42XLII	16.5" x 16" x 7"	24" x 19.3" x 18.4"	110V-1-60	16	0.80	150
8 Amp Plug: NEMA 5-15						



HENKELMAN USA
493 W. Fullerton Ave
Elmhurst, IL 60126
USA

Sales support
P +1 331-979-2013
E info@invacus.com
Service/technical support
P +1 331-979-2013
E info@invacus.com