




Project Name: \_\_\_\_\_ AIA#: \_\_\_\_\_ Model #: \_\_\_\_\_  
Location: \_\_\_\_\_ SIS#: \_\_\_\_\_ Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_



## 4913N Arby's® Automatic Slicer

### Premium Model:

- ☐ 4913N Nine Speed Auto Slicer with included 1-year Warranty
- ☐ 4913N Nine Speed Auto Slicer with 3-year extended Warranty



Made in the U.S.A.

GLOBE FOOD EQUIPMENT COMPANY

Arby's® Automatic Slicer

4913N

**Certified by NSF International to go above and beyond standard performance!**  
**NSF ANSI 8 2010 Standard**

### Premium Construction

- 13" *PreciseEdge™* hardened steel alloy knife blade with maximum tip-edge-holding ability
- Exclusive stainless steel construction
- No-drip base with Marine edge redirects liquids to center of base away from controls and operator
- Precise slice-thickness adjustment, one-piece knob, gear driven and gasket-sealed
- Carriage angle: 45°, full gravity feed
- 2° angled drip groove on the slicer table directs the flow of liquids to the base
- 15" long chute with 3 lb. stainless steel end weight
- Powerful 1/2 HP, 7 amp continuous use motor
- High-performance gear knife drive
- Maintenance-free auto drive system
- Permanently attached knife ring guard with removable slice deflector

### Cleanability Features

- Large stainless steel radii, open space base design for cleaning and simple dismantling of components
- Base has a Marine edge from 1/2" to 3/4" wide and indented areas with 3/16" deep radiused transition and 3/16" deep internal coved corners.

- Lift lever with dual rollers for cleaning and sanitizing under the slicer
- Attachable knife sharpening system is easy-to-install and use, is BPA Free (no-bisphenol-A), immersible, and dishmachine-safe for cleaning and sanitizing
- Moisture proof, easy-to-clean direct contact start/stop touchpad controls
- Sealed splash zones for added sanitation and protection of electronics

### Operator Full-featured Protections

- Home position start
- Knife Cover Interlock – slicer will not operate and slice table will not open when cover is removed
- Automatic return home - chute return to the home position when slicer is turned off
- Automatic mode start - unit starts in automatic mode
- No voltage release prevents inadvertent reactivation of slicer in the event of power or interlock interruption
- Permanent knife blade ring guard, removable cover and deflector
- Touch pad start/stop controls and power indicator light



GLOBE FOOD EQUIPMENT COMPANY  
2153 Dryden Rd, Dayton, OH 45439  
Phone: 937-299-5493 Fax: 937-299-4147  
800-347-5423  
[www.globefoodequip.com](http://www.globefoodequip.com)



Approved By: \_\_\_\_\_

Date: \_\_\_\_\_




### 4913N


Side View

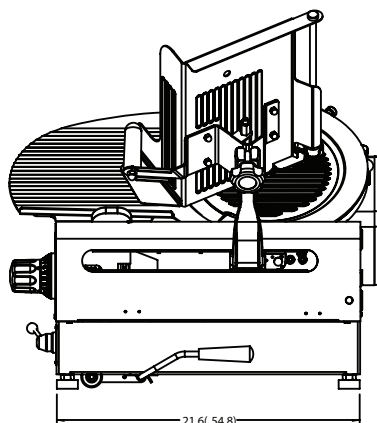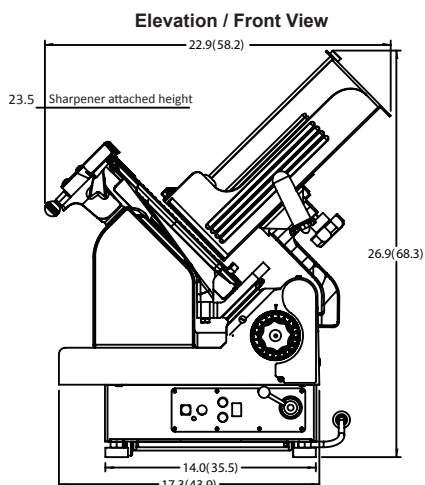

Plan / Top View

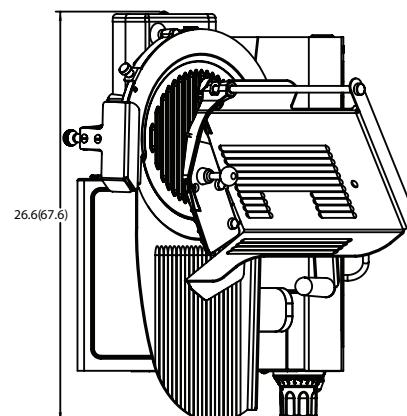

Side View/Lift Lever

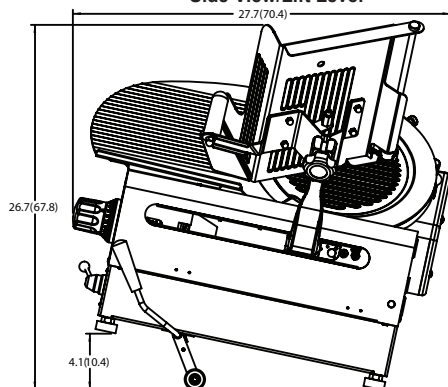

### SPECIFICATIONS

Model	Auto or Manual	Motor	Volts	Amps	Drive Type	Slicing Volume per Day	Cheese Slicing	Blade Diameter	Max Slice	Product Cutting Capacity		
										D (Diameter)	W (Width)	H (Height)
4913N	Both	1/2 HP	115-60-1	7	Gear	All Day	0  100%	13" (33.02 cm)	1-1/4" (3.18 cm)	7.5" (19.50 cm)	11.6" (29.46 cm)	9" (22.86 cm)

**Cord & Plug:** Attached 7 foot flexible 3-wire cord with molded plug fits a grounded receptacle. NEMA 5-15

### OTHER STANDARD FEATURES

- Arby's® brush package
- Foot retention plates

### SLICER ENHANCEMENT ACCESSORIES:

- ☐ 7" D x 14" L Stainless steel vegetable hopper
- ☐ Additional cleaning brush

### CHOOSE YOUR WARRANTY:

☐ Base program - 1 year parts, labor, and travel within a 50 mile radius of the authorized service center during normal business hours (M-F, 8am-5pm)

OR

☐ Extended service program - 3 years parts, labor, and travel within a 60 mile radius of the authorized service center during normal business hours (M-F, 8am-5pm). Includes 1 blade during the course of the service program and 2 preventative maintenance calls per year.

### DIMENSIONS & SHIPPING INFORMATION

Freight Class **77.5**

Cartons are reinforced for shipping. The weight and dimensions of this reinforced carton are included below, may vary from shipment to shipment and may include the weight from an attached skid.

Model	Foot Print	Overall Dimensions	Net Weight	Shipping Dimensions	Shipping Weight
4913N	14" D x 21.6" W (35.5 cm x 54.8 cm)	26.7" L x 23" W x 25.1" H (69.7 cm x 58.5 cm x 63.7 cm)	156 lbs. (76.8kg)	28" L x 25" W x 34" H (71.1 cm x 63.5 cm x 86.4 cm)	193 lbs. (87 kg)



## GLOBE FOOD EQUIPMENT COMPANY

[www.globefoodequip.com](http://www.globefoodequip.com)

2153 Dryden Rd.  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147