



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 107

ISSUED: 1-87

REVISED: 4-99

SECURITY FRAMED MIRROR WITH ROUNDED CORNERS - FRONT MOUNTED

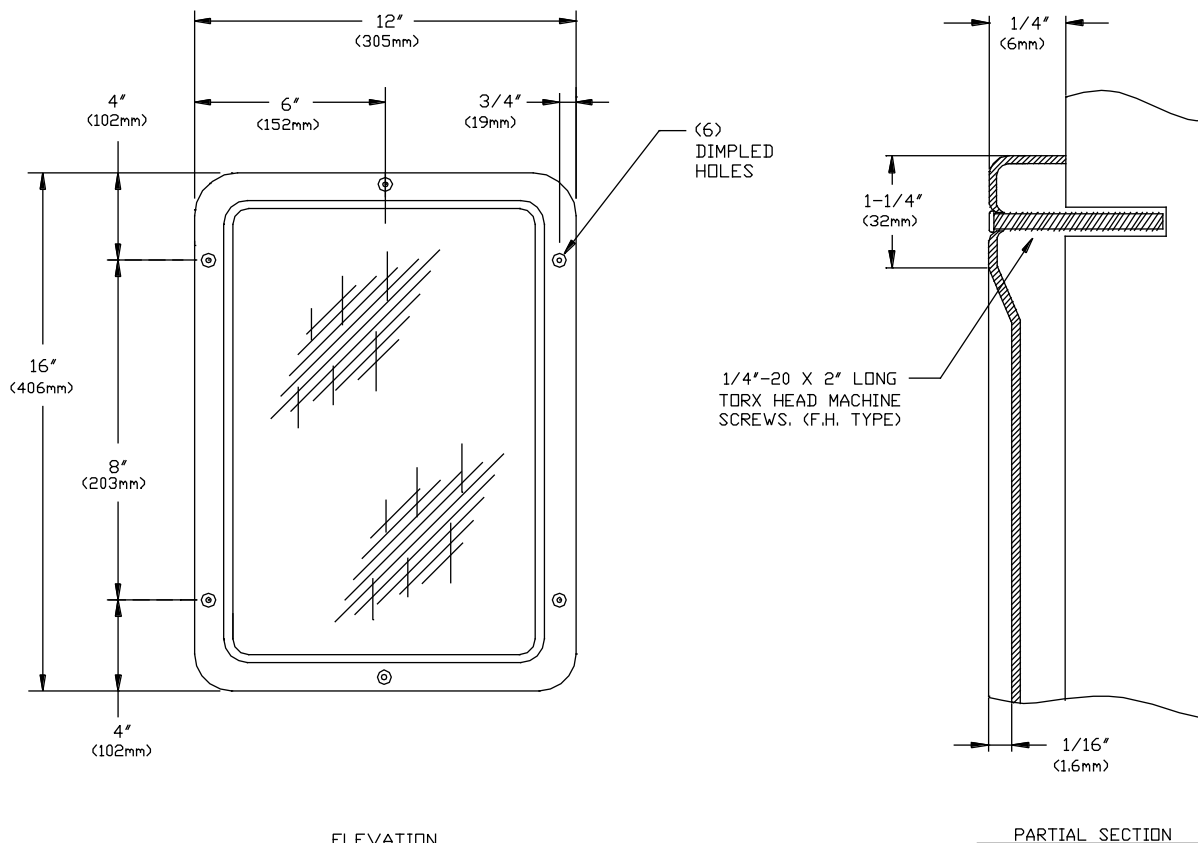

ELEVATION

PARTIAL SECTION

SPECIFICATION

Security Framed Mirror with Rounded Corners for Front Mounting to wall surface shall be fabricated of one piece formed alloy 18-8 stainless steel, type 304, N^o 18 gauge with N^o 8 mirror polish. Installed unit shall project 1/4" (6mm) from wall. Mirror frame shall be provided with six (6) dimpled mounting holes for 1/4" flat head screws. Six (6) 1/4" x 2" long pin-Torx[®] flat head machine screws shall be supplied for use in installation.

Security Framed Mirror with Rounded Corners - Front Mounted shall be Model N^o 107 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For Compliance with ADA Accessibility Guidelines, install unit so that bottom edge of reflecting surface is 40" (1016mm) maximum above finished floor. Insert six (6) wall anchors (by others) into finished wall to correspond with unit six (6) mounting holes. Mount and secure framed mirror to wall with six (6) 1/4" - 20 x 2" long pin-Torx[®] flat head machine screws (supplied), to anchors by others, through mounting holes provided in frame.

GLAZING OPTIONS

Various gauges and types of steel with different finishes are available. See security section in **MIRROR GLAZING OPTIONS**. For 20 gauge N^o 8 mirror polish finish specify option by adding suffix to Model N^o (e.g. 107-14).

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.