




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №: 128-1


ISSUED: JAN 1987

REVISED: 14 JAN 2022

FRONT MOUNTED BOOKSHELF WITH FOUR (4) SECURITY SAFETY CLOTHES HOOKS

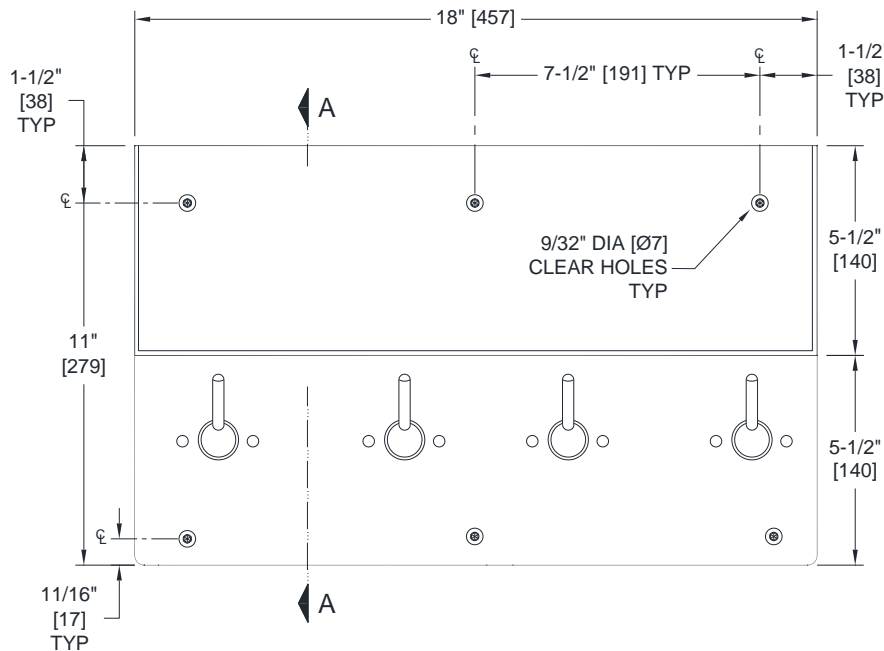

ELEVATION

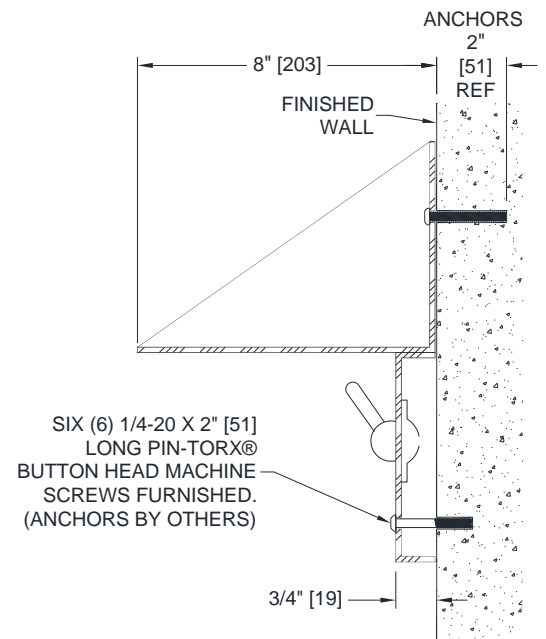

SECTION "A-A"

NOTE

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

SPECIFICATION

Bookshelf with four (4) Security Safety Clothes Hooks for surface mounting shall be type 304 stainless steel alloy 18-8. Back plate and bookshelf shall be 14 gauge. Clothes hooks shall be solid bar 3/8" Dia [Ø10] of one-piece construction with 1" Dia [Ø25] swivel trip-ball. Safety hook shall snap down when load exceeds 35 lb (16 kg) limit. Trip-ball socket housing shall prevent hook from being set in vertical up position. All exposed surfaces except shelf interior shall have satin finish. All seams shall be welded and ground smooth. The unit is provided with six (6) clear mounting holes that shall accept (supplied) 1/4"-20 X 2" or [M6 X 50] stainless steel pin-Torx® button head machine screws.

Front Mounted Bookshelf with four (4) Security Safety Clothes Hooks shall be Model № 128-1 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

INSTALLATION

For compliance with 2010 ADA Accessibility Standards install unit so that shelf is no more than 48" [1219] Maximum Above Finished Floor. Surface mount unit on finished wall with six (6) 1/4"-20 x 2" long [M6 X 50] pin-Torx® button head machine screws (provided) into wall anchors (by others) through front mounting holes (provided).

OPERATION

An 18" W [457] x 8" D [203] bookshelf is provided with triangular sidewalls to function as bookends. Clothes hooks are tensioned to release down when overloaded beyond the 35 lb (16 kg) limit.