

BTRS-1

AUTO-RINSE™



WORK FAST. WORK CLEAN.

BTRS-1 FEATURES

- Stainless steel construction
- Mounts to any wall or bar die wall with standard fasteners (4 additional installation options available)
- Quickly, thoroughly, and automatically rinses a pair of: mixing tins, mixing glasses, jiggers, Hawthorne strainers, wine portioning carafes, milk frothing pitchers, and more
- Warm-water rinse quickly dissolves sugars and other residues
- Disassembles for easy cleaning — all removable components can be placed on a single glass washer rack
- Does not require electricity
- Does not use chemicals
- NSF certified



BTRS-1 TECHNICAL SPECIFICATIONS

- Minimum water pressure requirement: 30 psi
- Self-metering valve: 1/2" NPSM inlet, 3/8" compression thread outlet
- Nozzles: solid-stream polypropylene
- Drain: oversized 1-1/2" drain fitting with strainer
- Backflow preventer: lead-free, dual-check valve
- Mixing valve: 3/8" compression threads. Check valve at inlets. Lever-dial adjustment with lock screw
- Materials: 18 ga. stainless steel. All plumbing components meet federal lead-free requirements and/or NSF standards
- Can rinse items up to 8" tall and 3.8" in diameter (standard mixing tins and mixing glasses)



PRODUCT NOTES (see pg. 2 for detailed diagrams)


- If mounting beneath bar top, shelving, or any obstruction more than 6" deep, allow minimum 2" clearance above unit for removal of top cover
- 1.5" PVC or copper drain line recommended. Bushing down to smaller sizes will accelerate clogging

Omni-Rinse, LLC • 1258 Remington Road Suite A • Schaumburg, IL 60173 • O: 847.792.1177 • F: 630.339.9070 • www.OmniRinse.com


Specifications subject to change without notice

Rev. 06.01.2020


BTRS-1 AUTO-RINSE™

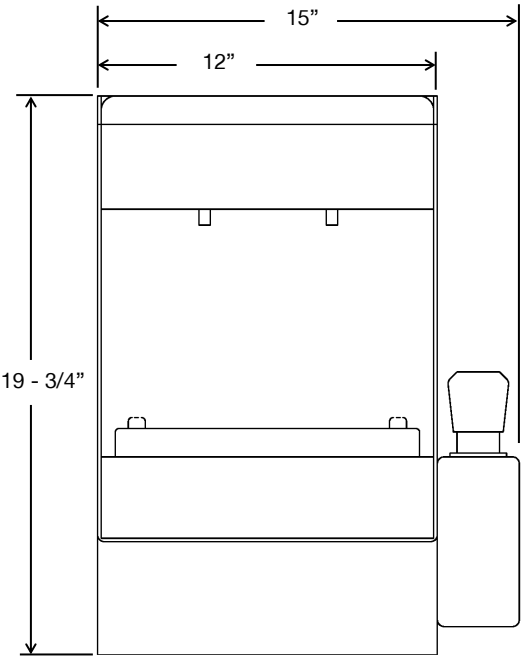


FRONT ELEVATION

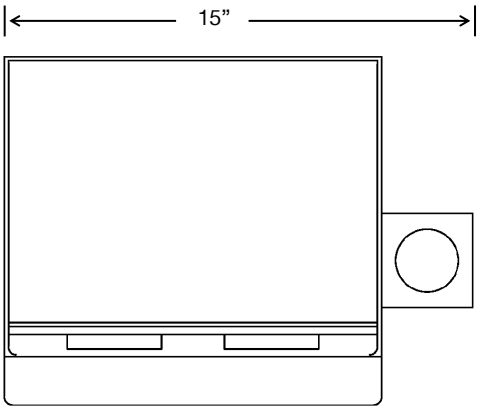

PLAN VIEW

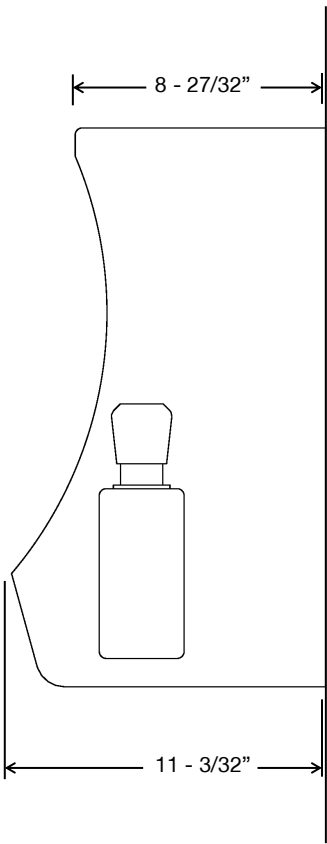

SIDE ELEVATION

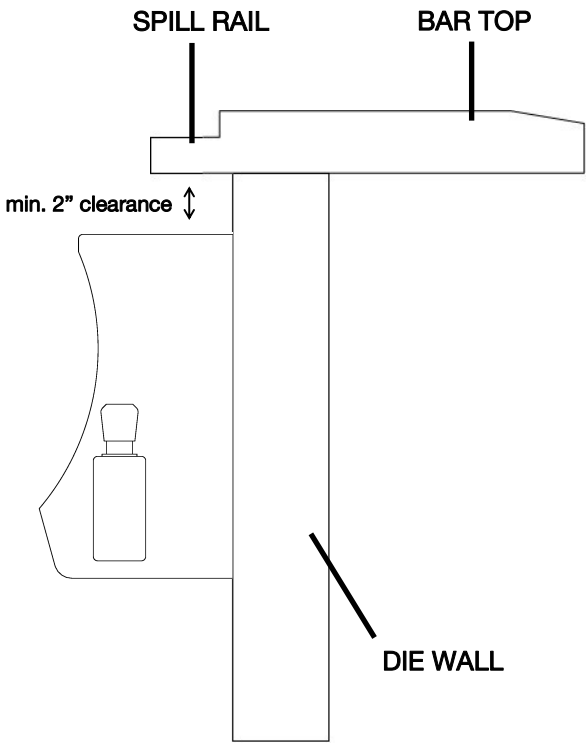

STANDARD WALL

DIE WALL