



Item #: 178A35RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco A-35R-HC 39 1/2" Solid Door Reach-In Refrigerator

Item #178A35RHC



Technical Data

Width	39 1/2 Inches
Depth	29 1/2 Inches
Height	82 1/2 Inches
Interior Width	35 Inches
Left Door Opening Width	15 3/8 Inches
Right Door Opening Width	15 3/8 Inches
Shelf Width	16 15/16 Inches
Interior Depth	24 3/8 Inches
Shelf Depth	21 1/4 Inches
Interior Height	59 1/2 Inches

Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Features two self-closing and stay-open locking doors
- Includes 6 epoxy coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- 115V; 3/7 hp; R-290 refrigerant

Certifications



5-15P



ETL Sanitation




ETL, US

Technical Data

Amps	4.1 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	385 Watts
Access Type	Doors
BTU (LBP)	1093 BTU
Capacity	29.73 cu. ft.
Capacity (per Shelf)	88 lb.
Caster Size	5 Inches
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	Removable Magnetic Door Gaskets
Handle Material	Plastic
Hinge Location	Left Right
Horsepower	3/7 hp
Installation Type	Freestanding
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3 oz.
Refrigerant Type	R-290
Sections	2 Sections
Starting Amps	12.3 Amps
Starting Wattage	1155 Watts
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

Plan View

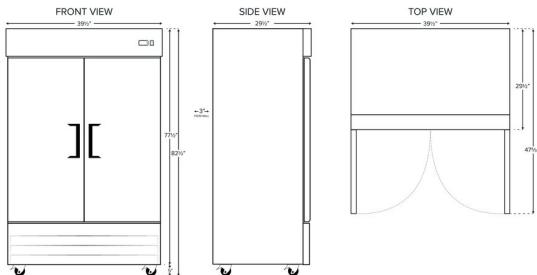



Notes & Details

Your establishment relies on refrigeration for proper food safety, and you will receive performance you can depend on with this Avantco A-35R-HC 39 1/2" solid door refrigerator! A painted aluminum interior with a 304 stainless steel floor gives you increased durability, while stainless steel doors and exterior sides give it a sleek appearance. For convenience, six epoxy-coated shelves, which hold up to 88 lb. each, feature shelf clips for customization when desired.

Designed to maintain temperatures between 33-40 degrees Fahrenheit, this fridge boasts a bottom-mounted 3/7 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. It also opens up the top of your unit for additional storage space, if necessary. For optimal temperature retention, the entire cabinet utilizes foamed-in-place polyurethane insulation. Other helpful features include the stay-open locking door mechanism, automatic defrosting, 5" casters, and digital temperature control. This item requires a 115V electrical connection for operation.

⚠️ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.