

Item #: 178A49RGHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco A-49R-G-HC 54" Glass Door Reach-In Refrigerator

Item #178A49RGHC



Technical Data

Width	54 Inches
Depth	32 3/16 Inches
Height	82 1/2 Inches
Interior Width	49 3/8 Inches
Left Door Opening Width	22 9/16 Inches
Right Door Opening Width	22 9/16 Inches
Shelf Width	23 1/4 Inches
Interior Depth	27 1/8 Inches
Shelf Depth	23 5/8 Inches
Interior Height	53 1/2 Inches

Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Features two self-closing doors
- Includes 6 epoxy-coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- 115V; 1/4 hp; R-290 refrigerant

Certifications



ETL, US



5-15P




ETL Sanitation

Technical Data

Amps	6.2 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	516 Watts
Access Type	Doors
BTU (LBP)	1264 BTU
Capacity	46.65 cu. ft.
Capacity (per Shelf)	88 lb.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Glass
Dutch Half Doors	Without Dutch Half Doors
Features	Removable Magnetic Door Gaskets Self-Closing Doors
Handle Material	Aluminum Alloy
Hinge Location	Left Right
Horsepower	1/4 hp
Installation Type	Freestanding
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	4.9 oz.
Refrigerant Type	R-290
Sections	2 Sections
Starting Amps	18.6 Amps
Starting Wattage	1548 Watts
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

Plan View

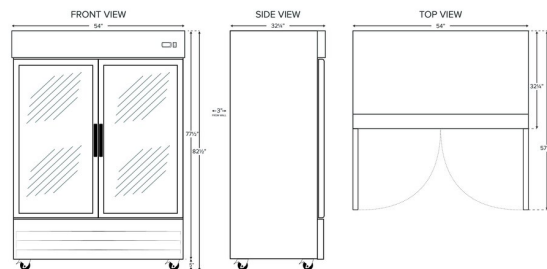



Notes & Details

Your establishment relies on refrigeration for proper food safety, and you will receive performance you can depend on with this Avantco A-49R-G-HC 54" glass door refrigerator! A painted aluminum interior with a 304 stainless steel floor gives you increased durability, while the stainless steel exterior gives it a sleek appearance. Its doors feature transparent glass, which easily displays products to customers or enables employees to spot the needed item before even opening up the fridge. For convenience, six epoxy-coated shelves, which hold up to 88 lb. each, feature shelf clips for customization when desired.

Designed to maintain temperatures between 33-40 degrees Fahrenheit, this fridge boasts a bottom-mounted 1/4 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. It also opens up the top of your unit for additional storage space, if necessary. For optimal temperature retention, the entire cabinet utilizes foamed-in-place polyurethane insulation. Other helpful features include the automatic defrosting and digital temperature control. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.