

Item #: 178AU27RHC Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

# Avantco AU-27R-HC 27" Undercounter Refrigerator

Item #178AU27RHC



## Technical Data

Width	27 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Power Cord Length	84 Inches
Interior Width	22 1/4 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Work Surface Height	35 1/4 Inches
Amps	2.2 Amps
Hertz	60 Hz


## Certifications



## Technical Data

Phase	1 Phase
Voltage	115 Volts
Wattage	210 Watts
Access Type	Doors
BTU (LBP)	666 BTU
Capacity	5.5 cu. ft.
Capacity (per Shelf)	88 lb.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Features	Removable Magnetic Door Gaskets
Hinge Location	Right
Horsepower	1/4 hp
Number of Doors	1 Doors
Number of Shelves	1 Shelf
Plug Type	NEMA 5-15P
Refrigerant Capacity	2.8 oz.
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	33 - 40 Degrees F
Top Capacity	441 lb.
Type	Refrigerators Undercounter Refrigerators

## Plan View

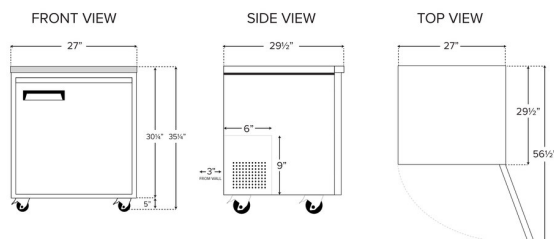

17BAU27RH1C



## Notes & Details

The Avantco AU-27R-HC 27" undercounter refrigerator will provide you with a dependable cold food storage solution. With a spacious refrigerator portion readily accessible through its single door, the unit opens up to a shelf that will aid in organizing your ingredients. Plus, because it accommodates up to 88 lb., the epoxy-coated steel shelf is well-equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The painted aluminum interior with a 304 stainless steel floor also offers the stability necessary for heavy, regular use. Because of its undercounter design, the refrigerator effortlessly adds cold storage space beneath a pre-existing countertop and doesn't require additional space for its own footprint.

This unit ensures optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps provide structural rigidity and maintain internal temperatures.

Operation of the refrigerator is easy, thanks to its special features. Monitor temperatures by consulting the interior wall-mounted thermometer and use the auto-defrost feature on the pre-programmed digital controller to keep the unit in excellent shape. Take advantage of the included casters and roll the unit aside to thoroughly clean the area. This undercounter refrigerator requires a 120V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).