

Item #: 178AU60FHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco AU-60F-HC 60" Undercounter Freezer

Item #178AU60FHC



Technical Data

Width	60 3/16 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Interior Width	55 5/8 Inches
Shelf Width	27 1/4 Inches
Interior Depth	23 1/2 Inches
Shelf Depth	17 Inches
Interior Height	19 13/16 Inches
Work Surface Height	35 1/4 Inches
Caster Diameter	5 Inches

Certifications



5-15P



ETL Sanitation




ETL, US

Technical Data

Amps	4.5 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	345 Watts
Access Type	Doors
BTU (LBP)	1991 BTU
Capacity	15 cu. ft.
Capacity (per Shelf)	88 lb.
Casters	With Casters
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Features	Removable Magnetic Door Gaskets Self-Closing Doors Stay-Open Doors
Horsepower	3/5 hp
Maximum Ambient Temperature	100 Degrees F
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.9 oz.
Refrigerant Type	R-290
Temperature Range	-7 - 0 Degrees F
Top Capacity	441 lb.
Type	Freezers Undercounter Freezers

Plan View

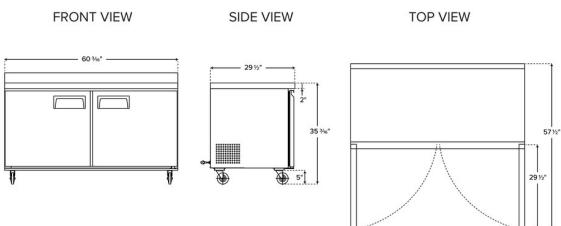



Notes & Details

The Avantco AU-60F-HC 60" undercounter freezer will provide you with a dependable frozen food storage solution. With a spacious freezer portion readily accessible through its two doors, the unit opens up to two shelves that will aid in organizing your ingredients. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well-equipped for holding heavy bulk ingredients, from frozen broccoli and cauliflower to frozen pork chops.

This unit is designed for outstanding durability to ensure that it withstands busy kitchen environments with ease. It features a stainless steel exterior, which provides both strength and a smooth, sleek appearance. The painted aluminum interior with a 304 stainless steel floor also offers the stability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds frozen storage space beneath a pre-existing countertop and doesn't require additional space for its own footprint.

This freezer ensures optimal performance by operating with a 2/3 hp refrigeration system that circulates R290 refrigerant to maintain temperatures from -8 to -1 degree Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps provide structural rigidity and maintain internal temperatures.

Operation of the freezer is easy, thanks to its special features. Monitor temperatures by consulting the interior wall-mounted thermometer and use the auto-defrost feature on the pre-programmed digital controller to keep the freezer in excellent shape. Take advantage of the included casters and roll the unit aside to thoroughly clean the area. This undercounter freezer requires a 115V electrical connection for operation.

⚠️ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.