

Item #: 178AU60RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco AU-60R-HC 60" Undercounter Refrigerator

Item #178AU60RHC



Technical Data

Width	60 3/16 Inches
Depth	29 1/2 Inches
Interior Width	55 5/8 Inches
Left Door Opening Width	25 11/16 Inches
Right Door Opening Width	25 11/16 Inches
Shelf Width	27 5/16 Inches
Interior Depth	22 7/8 Inches
Shelf Depth	17 Inches
Interior Height	23 1/2 Inches
Work Surface Height	35 1/4 Inches

Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Compact, undercounter size takes up minimal space
- Easy-to-read digital temperature controller and auto-defrost function
- Self-closing and stay-open door features for easy loading and unloading of product
- 115V; 1/5 hp; R290 refrigerant; 2.9 Amps

Certifications



5-15P



ETL Sanitation




ETL, US

Technical Data

Caster Diameter	5 Inches
Amps	2.9 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	860 BTU
Capacity	15 cu. ft.
Casters	With Casters
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Features	Casters Removable Magnetic Door Gaskets Self-Closing Doors Stay-Open Doors
Horsepower	1/5 HP
Individual Shelf Capacity	88 lb.
Maximum Ambient Temperature	100 Degrees F
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.5 oz.
Refrigerant Type	R-290
Shelf Material	Plastic Coated Steel
Temperature Range	33 - 40 Degrees F
Top Capacity	441 lb.

Plan View

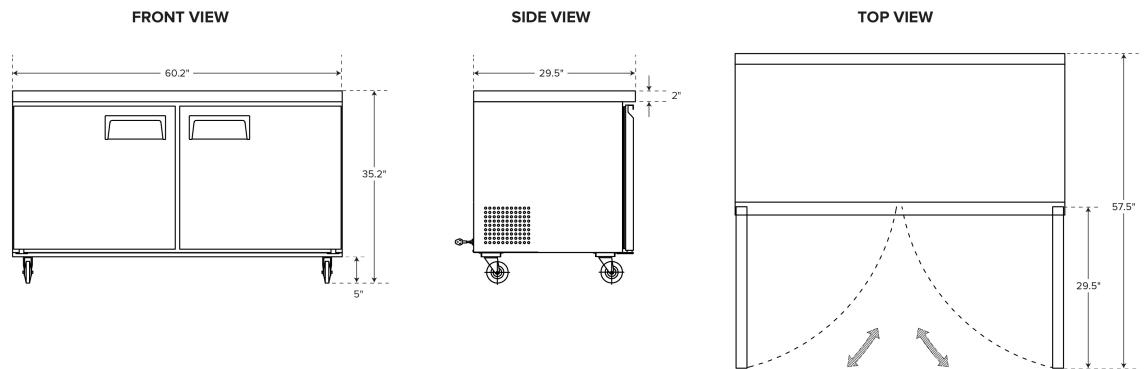



Notes & Details

The Avantco AU-60R-HC 60" undercounter refrigerator will provide you with a dependable cold food storage solution. With a spacious refrigerator portion readily accessible through its two doors, the unit opens up to two shelves that will aid in organizing your ingredients. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well-equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands busy kitchen environments with ease. It features a stainless steel exterior, which provides both strength and a smooth, sleek appearance. The painted aluminum interior with a 304 stainless steel floor also offers the stability necessary for heavy, regular use. Because of its undercounter design, the refrigerator effortlessly adds cold storage space beneath a pre-existing countertop and doesn't require additional space for its own footprint.

This unit ensures optimal performance by operating with a 1/5 hp refrigeration system that circulates R290 refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps provide structural rigidity and maintain internal temperatures.

Operation of the refrigerator is easy, thanks to its special features. Monitor temperatures by consulting the interior wall-mounted thermometer and use the auto-defrost feature on the pre-programmed digital controller to keep the unit in excellent shape. Take advantage of the included casters and roll the unit aside to thoroughly clean the area. This undercounter refrigerator requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.