

Item #: 178DDLC50B Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco DDLC-50-B 50" Black Square Glass Refrigerated Double-Duty Deli Case

Item #178DDLC50B



### Technical Data

|                    |                 |
|--------------------|-----------------|
| Width              | 50 Inches       |
| Depth              | 35 1/2 Inches   |
| Height             | 56 15/16 Inches |
| Power Cord Length  | 98 1/2 Inches   |
| Bottom Shelf Width | 24 3/8 Inches   |
| Door Opening Width | 12 5/8 Inches   |
| Interior Width     | 45 11/16 Inches |
| Middle Shelf Width | 21 7/8 Inches   |
| Bottom Shelf Depth | 27 1/2 Inches   |
| Interior Depth     | 31 3/16 Inches  |

### Features

- Sleek black exterior finish
- Durable commercial grade tempered glass and sliding rear doors
- Interior shelves for an organized display; added storage underneath
- Digital controller for easy operation and automatic defrost for easy maintenance
- Gravity coil system; R-290 refrigerant; 115V

### Certifications



ETL Sanitation



ETL, US & Canada




5-15P

## Technical Data

|                      |                          |
|----------------------|--------------------------|
| Middle Shelf Depth   | 31 Inches                |
| Door Opening Height  | 13 5/16 Inches           |
| Interior Height      | 47 5/8 Inches            |
| Amps                 | 5 Amps                   |
| Phase                | 1 Phase                  |
| Voltage              | 115 Volts                |
| Wattage              | 518 Watts                |
| Capacity             | 26.7 cu. ft.             |
| Casters              | With Casters             |
| Color                | Black                    |
| Compressor Location  | Bottom Mounted           |
| Display Case Type    | Double Duty Refrigerated |
| Door Style           | Sliding                  |
| Door Type            | Glass                    |
| Exterior Material    | Aluminum                 |
| Features             | LED Lighting             |
| Glass Style          | Flat                     |
| Horsepower           | 4/5 hp                   |
| Installation Type    | Floor Model              |
| Interior Material    | Aluminum                 |
| Number of Doors      | 2 Doors                  |
| Number of Shelves    | 4 Shelves                |
| Refrigerant Capacity | 2.8 oz.                  |
| Refrigerant Type     | R-290                    |
| Refrigeration Type   | Gravity Coil             |
| Service Type         | Full Service             |
| Starting Amps        | 15 Amps                  |
| Starting Wattage     | 1554 Watts               |
| Temperature          | 33 - 40 Degrees F        |
| Type                 | Deli Cases               |

## Plan View

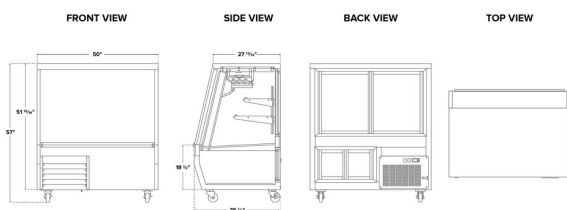

178DDLC50



## Notes & Details

Attractively present your fresh cheese, meat, and other refrigerated deli items with the Avantco DDLC-50-B 50" black square glass refrigerated deli case! With a sleek, square glass design, this contemporary case keeps contents sanitary while beautifully displaying them on the 2 stainless steel solid shelves and 2 epoxy-coated bottom shelves. With added storage underneath, this unit is easy to restock and helps save space in your establishment. Crisp, internal LED lighting provides superior visibility for your products. Having a deli case is sure to boost your impulse sales because customers can clearly see the products you're offering behind the strong, damage-resistant glass front. A durable black-painted aluminum exterior and aluminum interior offer long-lasting durability.

For optimal temperature retention, this deli case features foamed-in-place polyurethane insulation that protects the integrity of your refrigerated goods. A 4/5 hp refrigeration system keeps the unit operating at temperatures between 33-40 degrees Fahrenheit by circulating R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The digital temperature controller ensures quick temperature readability, and for convenience the unit has an auto defrost function. A set of 4" casters, 2 with brakes, provides the unit with convenient mobility. When it comes time for cleaning or maintenance, simply roll the unit away from the wall! A 115V electrical connection is required for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).