

Avantco GDC-40-HC 48" White Swing Glass Door Merchandiser Refrigerator with LED Lighting and Customizable Panel

Item #178GDC40WC




Technical Data

Width	48 Inches
Depth	25 5/8 Inches
Height	84 13/16 Inches
Power Cord Length	96 Inches
Interior Width	43 1/4 Inches
Interior Depth	19 1/4 Inches
Interior Height	55 1/8 Inches
Amps	1.91 Amps
Hertz	60 Hz
Phase	1 Phase

Features

- 2 self-closing, anti-fog swing glass doors
- Temperature range: 33 to 40 degrees Fahrenheit
- R290 refrigerant
- Interior LED lighting
- 115V, 1/4 hp; 1.91 Amps


Certifications



Technical Data

Voltage	115 Volts
Access Type	Doors
BTU (LBP)	1264 BTU
Capacity	28 cu. ft.
Capacity (per Shelf)	90 lb.
Color	White
Compressor Location	Bottom Mounted
Door Style	Swing
Door Type	Glass
Features	Customizable LED Lighting
Hinge Location	Left Right
Horsepower	1/4 hp
Installation Type	Freestanding
Interior Color	White
Number of Doors	2 Doors
Number of Shelves	8 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	2 Sections
Temperature Range	33 - 40 Degrees F
Type	Merchandising Refrigeration

Plan View

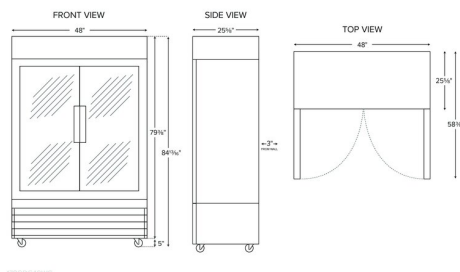

Notes & Details

Increase your sales of "grab and go" items like bottled tea and soda, or pre-packaged sandwiches and salads with this Avantco GDC-40-HC 48" white merchandising refrigerator! Designed with sharp looks and usability in mind, this unit is the perfect display for your products with its sleek finish. And, since the housing is made from white coated steel, you can be sure that it will provide superior durability. This unit boasts 2 anti-fogging glass swing doors to ensure that customers always have a clear view of your products, while 8 epoxy coated steel shelves help you stay organized. Plus, the shelves easily adjust to accommodate salads, wraps, or sandwiches. Interior LED lighting also works to illuminate and further merchandise your products.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/4 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include a self-closing mechanism on the doors, automatic defrosting, as well as a digital temperature control and display. This item requires a 115V electrical connection for operation.

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.