

Item#:	178GDICE49FW		Project:	
Otv:		Date:		Approval

Avantco GD-ICE-49F 53" White Indoor Glass Door Ice Merchandiser

Item #178GDICE49FW







Technical Data

Width	53 1/8 Inches	
Depth	31 7/8 Inches	
Height	83 7/8 Inches	
Power Cord Length	98 1/2 Inches	
Interior Width	47 1/4 Inches	
Left Door Opening Width	21 11/16 Inches	
Right Door Opening Width	21 11/16 Inches	
Interior Depth	27 Inches	
Opening Depth	58 11/16 Inches	
Interior Height	58 1/4 Inches	

Features

- 2 self-closing, triple-pane, argon-filled, anti-fog swing glass doors
- ideal ice holding temperature range: 18 to 25 degrees Fahrenheit
- Easy-to-use digital temperature controls; interior LED lighting
- Holds approximately (90) 8 lb. bags of ice
- 115V, 11/2 hp; 6.97 Amps; R290 refrigerant

Certifications










Technical Data

Amps	6.97 Amps	
Hertz	60 Hertz	
Phase	1 Phase	
Voltage	115 Volts	
BTU (LBP)	3732 BTU	
Capacity	36 cu. ft.	
Compressor Location	Bottom Mounted	
Door Style	Swing	
Door Type	Glass	
Features	Customizable LED Lighting	
Horsepower	1 1/2 HP	
Number of Doors	2 Doors	
Number of Shelves	2 Shelves	
Plug Type	NEMA 5-15P	
Refrigerant Capacity	4.9 oz.	
Refrigerant Type	R-290	
Refrigeration Type	Auto Defrost	
Temperature Range	18 - 25 Degrees F	
Туре	Indoor	

Plan View

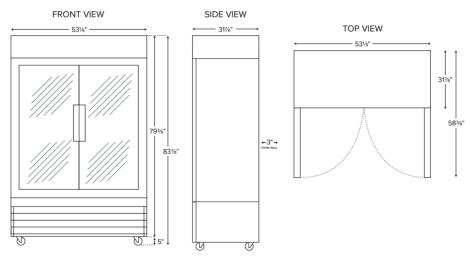



Notes & Details

Store and showcase your bagged ice offerings with this Avantco GD-ICE-49F 53" white ice merchandiser! Designed with sharp looks and usability in mind, this unit is the perfect display for your bags of ice with its sleek finish. And, since the housing is made from white coated steel and the interior floor is made from stainless steel, you can be sure that it will provide superior durability. This unit boasts 2 triple-pane, argon-filled, anti-fogging glass doors to ensure that customers always have a clear view of your products. Plus, the raised epoxy-coated steel shelf and back panel prevent product from blocking necessary air flow, while supporting up to 396 lb. of weight. Interior LED lighting works to illuminate and further merchandise your products. It even minimizes energy consumption by producing less heat than other types of lighting.

Designed to maintain ideal ice storage temperatures from 18 to 25 degrees Fahrenheit, this freezer boasts a bottom-mounted 1 1/2 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is made from foamed-in place polyurethane insulation. Other helpful features include self-closing doors, removable magnetic gaskets for easy cleaning, automatic defrosting, as well as a digital temperature control and display. This item requires a 115V electrical connection for operation.

MARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.