



Avantco Refrigeration

Item #: 178HBB25HCS Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco HBB-25-HC-S 25" Stainless Steel Horizontal Bottle Cooler

Item #178HBB25HCS



Technical Data

Width	26 3/8 Inches
Depth	28 Inches
Height	34 1/4 Inches
Power Cord Length	90 Inches
Interior Width	22 1/4 Inches
Left Door Opening Width	20 13/16 Inches
Interior Depth	23 Inches
Interior Height	15 3/4 Inches
Amps	2.4 Amps
Hertz	60 Hz

Features

- R290 hydrocarbon refrigerant
- Spacious 4.1 cu. ft. interior
- Includes a locking lid and a removable bottle opener / cap catcher
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/4 hp

Certifications



ETL Sanitation



ETL, US




5-15P

Technical Data

Phase	1 Phase
Voltage	115 Volts
Wattage	240 Watts
Access Type	Doors
BTU (LBP)	666 BTU
Capacity	4.1 cu. ft.
Compressor Location	Bottom Mounted
Compressor Style	Side / Rear Breathing
Construction	Stainless Steel and Aluminum
Exterior Finish	Stainless Steel
Horsepower	1/4 hp
Lid Style	Sliding
Lid Type	Solid
Number of 12 oz. Bottles	104 Bottles
Number of 12 oz. Cans	156 Cans
Number of Lids	1 Lid
Plug Type	NEMA 5-15P
Refrigerant Capacity	2.8 oz.
Refrigerant Type	R-290
Starting Amps	7.2 Amps
Starting Wattage	720 Watts
Temperature Range	33 - 40 Degrees F

Plan View

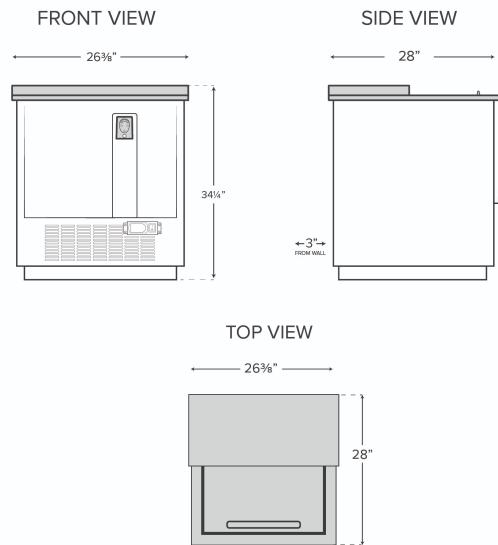



Notes & Details

Keep bottles of beer or soda on hand at all times by storing them in this Avantco 25" bottle cooler! Maintaining temperatures from 33 to 40 degrees, the cooler provides 4.1 cu. ft. of interior storage to ensure that a wide supply of bottles are kept cold and ready for thirsty customers. For your utmost convenience, a bottle opener / cap catcher is included with the unit. Just grab a beer, use the opener, and serve!

This unit is designed for outstanding durability to ensure that it withstands service through even your busiest days and nights. It features a sleek 430 stainless steel exterior and a painted aluminum interior. A stainless steel lid opens and closes with ease, making for easy drink retrieval. Because it locks, the lid also secures your beverage selection, making sure that your supply is always safe.

This cooler guarantees optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. Plus, the foamed-in-place polyurethane insulation adds rigidity and promotes proper temperatures. This ensures that all beverages held in the unit are at the perfect serving temperature.

You can adjust the cooler with the digital temperature controller as needed, and maintain the unit with its auto-defrost function. This unit requires a 115V electrical connection for operation.

⚠️ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.