

Item #: 178SS2F4HC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-2F-4-HC 54" Stainless Steel Solid Half Door Reach-In Freezer

Item #178SS2F4HC



Technical Data

| | |
|--------------------------|----------------|
| Width | 54 Inches |
| Depth | 32 3/16 Inches |
| Height | 82 1/2 Inches |
| Power Cord Length | 96 Inches |
| Interior Width | 49 3/8 Inches |
| Left Door Opening Width | 22 9/16 Inches |
| Right Door Opening Width | 22 9/16 Inches |
| Shelf Width | 20 7/8 Inches |
| Interior Depth | 27 1/8 Inches |
| Shelf Depth | 25 3/16 Inches |

Features

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Energy-saving half-door design with full length stainless steel handle and locks
- Perforated interior rear air duct for better air flow
- Digital temperature controller with automatic defrost function
- R290 refrigerant; 1 2/7 hp

Certifications



ETL, US



5-15P




ETL Sanitation

Technical Data

| | |
|----------------------|---|
| Interior Height | 60 1/4 Inches |
| Amps | 8.5 Amps |
| Hertz | 60 Hz |
| Phase | 1 Phase |
| Voltage | 115 Volts |
| Wattage | 780 Watts |
| Access Type | Doors |
| BTU (LBP) | 2614 BTU |
| Capacity | 46.65 cu. ft. |
| Capacity (per Shelf) | 100 lb. |
| Casters | With Casters |
| Color | Silver |
| Compressor Location | Bottom Mounted |
| Construction | All Stainless Steel |
| Door Style | Swing |
| Door Type | Solid |
| Dutch Half Doors | With Dutch Half Doors |
| Features | LED Lighting Removable Magnetic Door Gaskets |
| Handle Material | Stainless Steel |
| Hinge Location | Left Right |
| Horsepower | 1 2/7 hp |
| Installation Type | Freestanding |
| Number of Doors | 4 Doors |
| Number of Shelves | 6 Shelves |
| Plug Type | NEMA 5-15P |
| Refrigerant Capacity | 4.6 oz. |
| Refrigerant Type | R-290 |
| Sections | 2 Sections |
| Starting Amps | 25.5 Amps |
| Starting Wattage | 2340 Watts |
| Temperature Range | -8 - -1 Degrees F |
| Type | Freezers |

Plan View

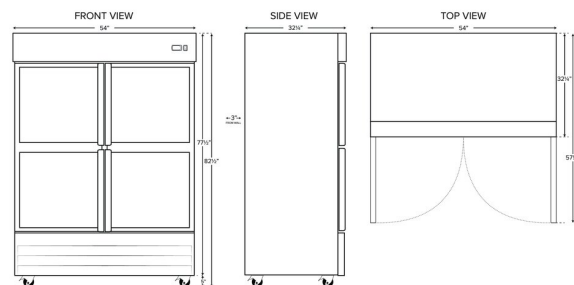



Notes & Details

Providing impressive performance and dependable durability, this Avantco SS-2R-4-HC 54" stainless steel solid half door reach-in freezer is engineered to hold your cold food investments in a food safe environment. Its half door design helps lower energy costs since you only need to open one door at a time. Plus, with 430 stainless steel doors and exterior sides, the unit features a sleek appearance that's matched with its ability to withstand busy, heavy-use kitchens. The interior is 304 stainless steel, giving the unit superior corrosion resistance and cleanability; it won't become damaged by inevitable spills and messes. As a result, it's easier for your employees to maintain during the hustle and bustle of their daily tasks.

For ultimate storage flexibility, this freezer even comes with 6 epoxy coated shelves with a versatile shelf slide design that can accept full size food pans! Designed for your utmost convenience, the unit is sure to accommodate your ever-evolving needs as your business grows, expands, and transforms over time. This unit also boasts interior LED lighting that automatically turns on and off when you open and close the door. This helps improve visibility and streamline your work flow.

Programmed to maintain temperatures between -8 to -1 degree Fahrenheit, this freezer ensures that all food products are held in a proper, food safe environment to preserve their quality and integrity. To help achieve this, the robust, bottom-mounted 1 2/7 hp compressor runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For maximum structural rigidity, the entire cabinet is foamed-in place using polyurethane insulation.

Making the freezer easy to monitor and operate, an automatic defrost feature and a digital temperature control with digital display are integrated for intuitive use. Each solid door includes a self-closing mechanism, which enables easy access at all times, and a set of casters provides the unit with mobility. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.