

ltem#:	178SS2FHC		Project:	
Otv:		Date:		Annroval

Avantco SS-2F-HC 54" Stainless Steel Two Section Solid Door Reach-In **Freezer**

Item #178SS2FHC







Technical Data

Width	54 Inches	
Depth	32 3/16 Inches	
Height	82 1/2 Inches	
Power Cord Length	96 Inches	
Interior Width	49 3/8 Inches	
Left Door Opening Width	22 9/16 Inches	
Right Door Opening Width	22 9/16 Inches	
Shelf Width	20 7/8 Inches	
Interior Depth	27 1/8 Inches	
Shelf Depth	25 3/16 Inches	

Features

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Features 2 self-closing and stay-open locking doors with full length stainless steel
- Perforated interior rear air duct for better air flow
- Removable one-piece grill for easy cleaning and service
- R290 refrigerant; 12/7 hp; 6.08 Amps

Certifications










Technical Data

Interior Height	60 1/4 Inches
Amps	6.08 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	2614 BTU
Capacity	46.65 cu. ft.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	LED Lighting Removable Magnetic Door Gaskets Self-Closing Doors
Handle Material	
Manule Material	Stainless Steel
Hinge Location	Stainless Steel Left/Right
Hinge Location	Left/Right
Hinge Location Horsepower	Left/Right 1 2/7 HP
Hinge Location Horsepower Individual Shelf Capacity	Left/Right 1 2/7 HP 100 lb.
Hinge Location Horsepower Individual Shelf Capacity Installation Type	Left/Right 1 2/7 HP 100 lb. Freestanding
Hinge Location Horsepower Individual Shelf Capacity Installation Type Number of Doors	Left/Right 1 2/7 HP 100 lb. Freestanding 2 Doors
Hinge Location Horsepower Individual Shelf Capacity Installation Type Number of Doors Number of Shelves	Left/Right 1 2/7 HP 100 lb. Freestanding 2 Doors 6 Shelves
Hinge Location Horsepower Individual Shelf Capacity Installation Type Number of Doors Number of Shelves Plug Type	Left/Right 1 2/7 HP 100 lb. Freestanding 2 Doors 6 Shelves NEMA 5-15P
Hinge Location Horsepower Individual Shelf Capacity Installation Type Number of Doors Number of Shelves Plug Type Refrigerant Capacity	Left/Right 1 2/7 HP 100 lb. Freestanding 2 Doors 6 Shelves NEMA 5-15P 4.6 oz.
Hinge Location Horsepower Individual Shelf Capacity Installation Type Number of Doors Number of Shelves Plug Type Refrigerant Capacity Refrigerant Type	Left/Right 1 2/7 HP 100 lb. Freestanding 2 Doors 6 Shelves NEMA 5-15P 4.6 oz. R-290

Plan View

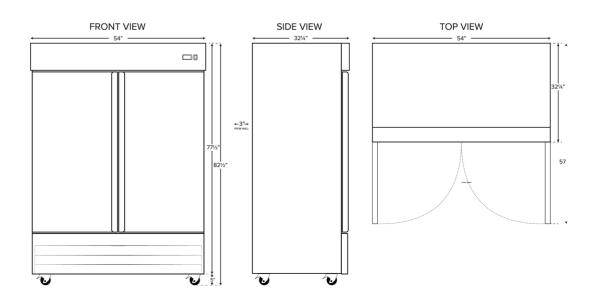



Notes & Details

Providing impressive performance and dependable durability, this Avantco SS-2R-HC 54" stainless steel solid door reach-in freezer is engineered to hold your cold food investments in a food safe environment. Designed with a 430 stainless steel door and exterior sides, the unit features a sleek appearance that's matched with its ability to withstand busy, heavy-use kitchens. Plus, the interior is 304 stainless steel, giving the unit superior corrosion resistance and cleanability; it won't become damaged by inevitable spills and messes. As a result, it's easier for your employees to maintain during the hustle and bustle of their daily tasks. For ultimate storage flexibility, this freezer even comes with 6 epoxy coated shelves with a versatile shelf slide design that can accept full size food pans! Designed for your utmost convenience, the unit is sure to accommodate your ever-evolving needs as your business grows, expands, and transforms over time. This unit also boasts interior LED lighting that automatically turns on and off when you open and close the door. This helps improve visibility and streamline your work flow.

Programmed to maintain temperatures between -8 to -1 degree Fahrenheit, this freezer ensures that all food products are held in a proper, food safe environment to preserve their quality and integrity. To help achieve this, the robust, bottom-mounted 1 2/7 hp compressor runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For maximum structural rigidity, the entire cabinet is foamed-in place using polyurethane insulation.

Making the freezer easy to monitor and operate, an automatic defrost feature and a digital temperature control with digital display are integrated for intuitive use. Each solid door includes a self-closing mechanism, which enables easy access at all times, and a set of casters provides the unit with mobility. This item requires a 115V electrical connection for operation.

▲ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.