

ltem#:	178SS2RHC		Project:	
∩+\ <i>r</i> ·		Data		Annroyal

### Avantco SS-2R-HC 54" Stainless Steel Solid Door Reach-In Refrigerator

Item #178SS2RHC







# **Technical Data**

Width	54 Inches	
Depth	32 3/16 Inches	
Height	82 1/2 Inches	
Power Cord Length	96 Inches	
Interior Width	49 3/8 Inches	
Left Door Opening Width	22 9/16 Inches	
Right Door Opening Width	22 9/16 Inches	
Shelf Width	20 7/8 Inches	
Interior Depth	27 1/8 Inches	
Shelf Depth	25 3/16 Inches	

### **Features**

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Features 2 self-closing and stay-open locking doors with full length stainless steel
- Perforated interior rear air duct for better air flow
- Digital temperature controller with automatic defrost function
- R290 refrigerant; 115V, 1/2 hp; 3.14 Amps

#### Certifications



ETL, US & Canada



ETL Sanitation






# **Technical Data**

Interior Height	60 1/4 Inches	
Amps	3.14 Amps	
Hertz	60 Hertz	
Phase	1 Phase	
Voltage	115 Volts	
Access Type	Doors	
BTU (LBP)	1264 BTU	
Capacity	46.65 cu. ft.	
Casters	With Casters	
Color	Silver	
Compressor Location	Bottom Mounted	
Construction	All Stainless Steel	
Door Style	Swing	
Door Type	Solid	
Dutch Half Doors	Without Dutch Half Doors	
Features	LED Lighting Removable Magnetic Door Gaskets	
Handle Material	Stainless Steel	
Hinge Location	Left/Right	
Horsepower	1/2 HP	
Individual Shelf Capacity	100 lb.	
Installation Type	Freestanding	
Number of Doors	2 Doors	
Number of Shelves	6 Shelves	
Plug Type	NEMA 5-15P	
Refrigerant Capacity	4.6 oz.	
Refrigerant Type	R-290	
Sections	2 Sections	
Temperature Range	33 - 40 Degrees F	
Туре	Refrigerators	

# **Plan View**

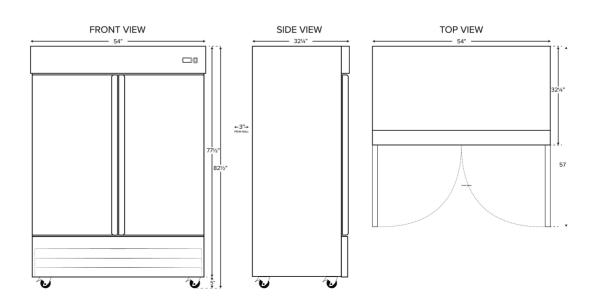



#### **Notes & Details**

Providing impressive performance and dependable durability, this Avantco SS-2R-HC 54" stainless steel solid door reach-in refrigerator is engineered to hold your cold food investments in a food safe environment. Designed with a 430 stainless steel door and exterior sides, the unit features a sleek appearance that's matched with its ability to withstand busy, heavy-use kitchens. Plus, the interior is 304 stainless steel, giving the unit superior corrosion resistance and cleanability; it won't become damaged by inevitable spills and messes. As a result, it's easier for your employees to maintain during the hustle and bustle of their daily tasks. For ultimate storage flexibility, this refrigerator even comes with 6 epoxy coated shelves with a versatile shelf slide design that can accept full size food pans! Designed for your utmost convenience, the unit is sure to accommodate your ever-evolving needs as your business grows, expands, and transforms over time. This unit also boasts interior LED lighting that automatically turns on and off when you open and close the door. This helps improve visibility and streamline your work flow.

Programmed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator ensures that all food products are held in a proper, food safe environment to preserve their quality and integrity. To help achieve this, the robust, bottom-mounted 1/2 hp compressor runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For maximum structural rigidity, the entire cabinet is foamed-in place using polyurethane insulation.

Making the refrigerator easy to monitor and operate, an automatic defrost feature and a digital temperature control with digital display are integrated for intuitive use. Each solid door includes a self-closing mechanism, which enables easy access at all times, and a set of casters provides the unit with mobility. This item requires a 115V electrical connection for operation.

▲ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to <a href="https://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>.