

ltem#:	178SSPT27C		Project:	
Otv.		Date:		Annroval

Avantco SS-PT-27-C 27" 1 Door Stainless Steel Cutting Top Refrigerated Sandwich Prep Table with Extra Deep Cutting Board

Item #178SSPT27C







Technical Data

Width	27 1/2 Inches	
Depth	31 Inches	
Height	42 3/8 Inches	
Power Cord Length	84 Inches	
Cutting Board Width	27 1/2 Inches	
Interior Width	24 Inches	
Nominal Width	27 Inches	
Cutting Board Depth	15 Inches	
Interior Depth	23 3/4 Inches	
Interior Height	23 1/2 Inches	

Features

- Top accommodates (6) 1/6 size and (2) 1/9 size, 6" deep food pans
- Removable 15" extra deep, 3/4" thick cutting board provides 4 1/2" more depth than standard board
- Digital control with auto defrost
- Stainless steel exterior and interior; foamed-in-place polyurethane insulation
- 115V; R290 refrigerant; 3/7 hp; 2 Amps

Certifications








ETL Sanitation ETL, US & Canada



Technical Data



Plan View

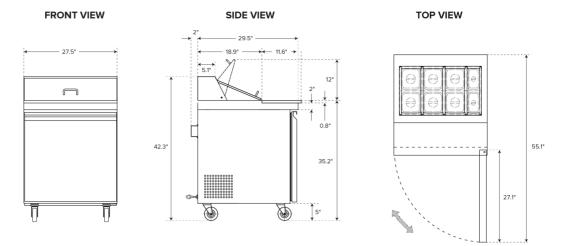

Notes & Details

Optimize your back-of-house operations with this Avantco SS-PT-27-C 27" 1 door stainless steel refrigerated sandwich prep table, and keep up with customer demands. Whether used in a university, sub shop, or hospital, the unit is sure to help streamline the sandwich prep process with its convenient features and capacity. Its top accommodates up to (6) 1/6 size and (2) 1/9 size food pans up to 6" deep (sold separately). These are great for holding common sandwich or salad toppings, from eggs and cheese to green pepper or ham. Plus, a lift-up lid encloses the top to maintain safe temperatures. An extra large 15" deep full length cutting board is mounted to the table surface, providing maximum space for slicing ingredients and assembling orders.

Beneath the prep top, additional refrigerated storage space is perfect for storing back-up ingredients, such as deli meat and cheese, as well as less common toppings. An epoxy-coated shelf is included and can accommodate up to 90 lb. of weight, helping to organize your assorted supplies. You can even use a reversible hinge kit (sold separately) to convert the hinges to the left side of the unit. Divider bars are also included for ultimate convenience.

High-quality performance is made possible by the unit's 3/7 hp refrigeration system, which maintains temperatures between 33 and 40 degrees Fahrenheit. It does this by circulating R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3.

The construction of this unit is designed with commercial use in mind. It features a 430 type stainless steel exterior and 304 type stainless steel interior, which are fortified with foamed-in-place polyurethane insulation for proper temperature retention. For operation, the prep table requires a 115V electrical connection.

MARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.