

| Item#:     | 178SSPT60AC |        | Project: |           |  |
|------------|-------------|--------|----------|-----------|--|
| <b>.</b> . |             | 5 .    |          |           |  |
| Otv.       |             | l)ate· |          | Annroval: |  |

# Avantco SS-PT-60-AC 60" ADA Height 2 Door Stainless Steel Cutting Top Refrigerated Sandwich Prep Table with Extra Deep Cutting Board

Item #178SSPT60AC







### **Technical Data**

| Width                  | 60 1/4 Inches |  |
|------------------------|---------------|--|
| Depth                  | 35 1/2 Inches |  |
| Height                 | 40 7/8 Inches |  |
| Power Cord Length      | 84 Inches     |  |
| Interior Width         | 56 1/4 Inches |  |
| Nominal Width          | 60 Inches     |  |
| Cutting Board<br>Depth | 15 Inches     |  |
| Interior Depth         | 23 3/4 Inches |  |
| Interior Height        | 23 1/2 Inches |  |
| Work Surface<br>Height | 33 3/4 Inches |  |

#### **Features**

- 2 1/2" casters make moving simple and bring the unit to an ADA-compliant working height
- Top accommodates (16) 1/6 size, 6" deep food pans
- Industry-best 3/4" cutting board is built-in for convenient prep space and removable for cleaning
- Digital control with auto defrost
- Uses R-290 refrigerant; 115V; 1/2 hp

#### Certifications





**ADA Compliant** 



**ETL Sanitation** 




ETL, US & Canada



## **Technical Data**

| Amps                    | 5.4 Amps   |  |  |
|-------------------------|--|--|--|
| Hertz                   | 60 Hertz   |  |  |
| Phase                   | 1 Phase  |  |  |
| Voltage                 | 115 Volts  |  |  |
| Wattage                 | 540 Watts  |  |  |
| 1/6 Size Pan Capacity   | 16 Pans  |  |  |
| Access Type             | Doors  |  |  |
| BTU (LBP)               | 1285 BTU   |  |  |
| Capacity                | 15 cu. ft.                                       |  |  |
| Casters                 | With Casters                                     |  |  |
| Color                   | Silver   |  |  |
| Compressor Location     | Rear Mounted                                     |  |  |
| Compressor Style        | Side / Rear Breathing                            |  |  |
| Construction            | Stainless Steel                                  |  |  |
| Cutting Board Thickness | 3/4 Inch   |  |  |
| Door Style              | Swing  |  |  |
| Door Type               | Solid  |  |  |
| Features                | ADA Compliant<br>Removable Magnetic Door Gaskets |  |  |
| Hinge Location          | Left<br>Right                                    |  |  |
| Horsepower              | 1/2 HP   |  |  |
| Number of Doors         | 2 Doors  |  |  |
| Number of Shelves       | 2 Shelves  |  |  |
| Plug Type               | NEMA 5-15P                                       |  |  |
| Refrigerant Type        | R-290  |  |  |
| Starting Amps           | 16.2 Amps  |  |  |
| Starting Wattage        | 1620 Watts                                       |  |  |
| Style                   | ADA Height                                       |  |  |
| Temperature Range       | 33 - 40 Degrees F                                |  |  |
| Тор Туре                | Cutting Top<br>Standard Top                      |  |  |
| Туре                    | Prep Refrigeration                               |  |  |

## **Plan View**

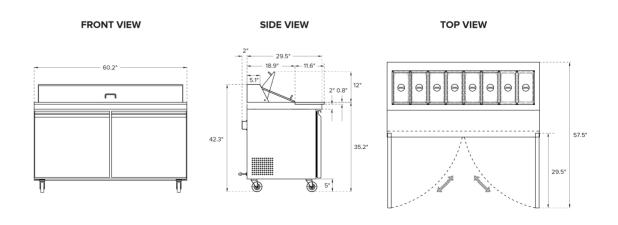



#### **Notes & Details**

Optimize your back-of-house operations with this Avantco SS-PT-60-AC 60" 2 door stainless steel refrigerated sandwich prep table, and better keep up with customer demands. Whether used in a university, sub shop, or hospital, the unit is sure to help streamline the sandwich prep process with its convenient features and capacity. Its top, for instance, accommodates up to (16) 1/6 size food pans up to 6" deep (sold separately). These are great for holding common sandwich or salad toppings, from eggs and cheese to green pepper or ham. Plus, a lift-up lid encloses the top to maintain proper, food safe temperatures. An extra deep full-length cutting board, which is 15" deep to provide plenty of prep space, is mounted to the table surface but can be removed for thorough cleaning.

Beneath the workspace is additional storage space. Because it's refrigerated, the space is great for storing back-up ingredients, such as deli meat and cheese, as well as less common toppings. Two epoxy-coated shelves are included and can each accommodate up to 90 lb. of weight, helping to organize your assorted supplies.

High-quality performance is made possible by the unit's 1/2 hp refrigeration system, which maintains temperatures between 33 and 40 degrees Fahrenheit. It does this by circulating R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3.

The construction of this unit is designed with commercial use in mind. It features a 430 type stainless steel exterior and 304 type stainless steel interior, which are fortified with foamed-in-place polyurethane insulation. The insulation also helps to promote proper temperature retention. 2 1/2" casters make moving simple for easy cleaning and bring the unit to an ADA-compliant working height. For operation, the prep table requires a 115V electrical connection.

MARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to <a href="https://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>.