

Item #: 178SSUC60FHC Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UC-60F-HC 60" Undercounter Freezer

Item #178SSUC60FHC



### Technical Data

|                          |                 |
|--------------------------|-----------------|
| Width                    | 60 1/4 Inches   |
| Depth                    | 29 1/2 Inches   |
| Height                   | 35 1/4 Inches   |
| Power Cord Length        | 84 Inches       |
| Interior Width           | 55 5/8 Inches   |
| Left Door Opening Width  | 25 11/16 Inches |
| Right Door Opening Width | 25 11/16 Inches |
| Shelf Width              | 27 1/4 Inches   |
| Interior Depth           | 22 7/8 Inches   |
| Shelf Depth              | 17 Inches       |

### Features

- Strong and sleek type 430 stainless steel exterior
- Type 304 stainless steel interior maintains temperatures from -8 to -1 degrees Fahrenheit
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller
- 115V; 2/3 hp

### Certifications



5-15P



ETL, US




ETL Sanitation

## Technical Data

|                      |                                   |
|----------------------|-----------------------------------|
| Interior Height      | 23 1/2 Inches                     |
| Work Surface Height  | 35 1/4 Inches                     |
| Amps                 | 4.5 Amps                          |
| Hertz                | 60 Hz                             |
| Phase                | 1 Phase                           |
| Voltage              | 115 Volts                         |
| Wattage              | 345 Watts                         |
| Access Type          | Doors                             |
| BTU (LBP)            | 1692 BTU                          |
| Capacity             | 14.2 cu. ft.                      |
| Capacity (per Shelf) | 88 lb.                            |
| Compressor Location  | Rear Mounted                      |
| Compressor Style     | Side / Rear Breathing             |
| Door Style           | Swing                             |
| Door Type            | Solid                             |
| Features             | Removable Magnetic Door Gaskets   |
| Hinge Location       | Left<br>Right                     |
| Horsepower           | 3/5 hp                            |
| Number of Doors      | 2 Doors                           |
| Number of Shelves    | 2 Shelves                         |
| Plug Type            | NEMA 5-15P                        |
| Refrigerant Capacity | 3.9 oz.                           |
| Refrigerant Type     | R-290                             |
| Starting Amps        | 13.5 Amps                         |
| Starting Wattage     | 1035 Watts                        |
| Style                | Counter Height                    |
| Temperature Range    | -8 - -1 Degrees F                 |
| Top Capacity         | 441 lb.                           |
| Type                 | Freezers<br>Undercounter Freezers |

## Plan View

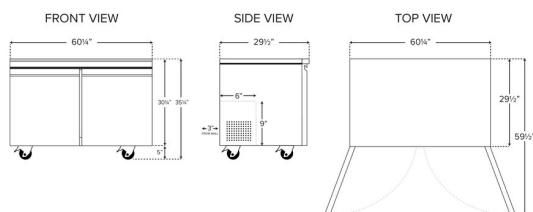

178SSUC60PHC

## Notes & Details

Make cold food storage as convenient as possible with the Avantco 60" undercounter freezer. With a spacious refrigerated portion readily accessible through its two doors, the unit opens up to two shelves to help you organize your ingredients and best utilize the 14.2 cu. ft. interior. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds frozen storage space without requiring space devoted solely to its footprint.

This freezer ensures optimal performance by operating with a 2/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from -8 to -1 degree Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to maintain internal temperatures and adds rigidity to the body's structure.

Operation of the freezer is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the freezer in tip-top shape. 2 1/2" casters make moving simple for easy cleaning and bring the unit to an ADA-compliant working height. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).