

Item#:	178SSUD260RB		Project:	
				_
O+v.		Data		Approvale

Avantco SS-UD-260RB 60" Stainless Steel Extra Deep Undercounter Refrigerator with 2 Right Drawers and 1 Door

Item #178SSUD260RB







Technical Data

Width	60 Inches	
Depth	31 1/2 Inches	
Height	34 7/16 Inches	
Power Cord Length	98 Inches	
Interior Width	39 11/16 Inches	
Packaging Width	62 3/4 Inches	
Shelf Width	15 1/5 Inches	
Interior Depth	26 3/16 Inches	
Packaging Depth	34 1/4 Inches	
Shelf Depth	24 2/5 Inches	

Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel
- Side-mounted compressor allows for greater storage depth
- Easy-to-read digital temperature controller
- Includes 2 right-side drawers and 6 divider bars to hold full size or fractional pans
- 115V; 2/5 hp; 2.63 Amps
- 2 year Parts and Labor Warranty ensures long-lasting peace of mind

Certifications



ETL Sanitation









Technical Data

Interior Height	22 7/8 Inches	
Packaging Height	36 1/4 Inches	
Work Surface Height	35 1/4 Inches	
Amps	2.63 Amps	
Hertz	60 Hertz	
Phase	1 Phase	
Voltage	115 Volts	
Access Type	Doors and Drawers	
BTU (LBP)	631 BTU	
Capacity	13.1 cu. ft.	
Compressor Style	Side / Rear Breathing	
Door Style	Swing	
Door Type	Solid	
Features	Automatic Electric Defrost Digital Temperature Controller Removable Magnetic Door Gaskets Removable Magnetic Drawer Gaskets Self-Closing Doors Stay-Open Doors	
Hinge Location	Left	
Horsepower	2/5 HP	
Individual Shelf Capacity	90 lb.	
Insulation Material	Polyurethane Foam	
Material	Stainless Steel	
Maximum Ambient Temperature	90 Degrees F	
Net Weight	220 lb.	
Number of Doors	1 Doors	
Number of Drawers	2 Drawers	
Number of Shelves	1 Shelf	
Plug Type	NEMA 5-15P	
Refrigerant Type	R-290	
Style	Counter Height	
Temperature Range	33 - 40 Degrees F	
Top Capacity	353 lb.	
Туре	Refrigerators Undercounter Refrigerators	



Plan View

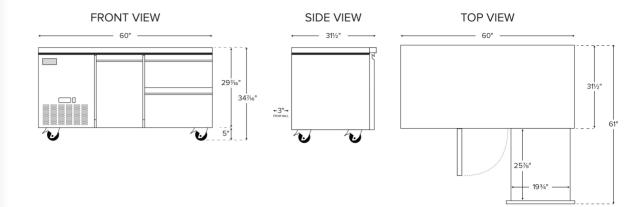

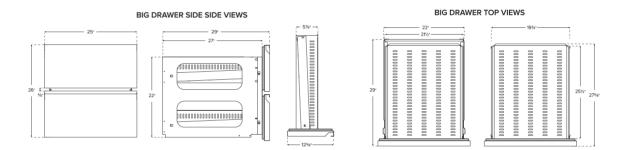



Notes & Details

Make cold food storage as convenient as possible with the Avantco SS-UD260RB 60" extra deep undercounter refrigerator. With a spacious refrigerated portion readily accessible through 2 drawers on the right and a door on the left, the 13.1 cu. ft. unit helps you organize your ingredients. While the door section features an epoxy-coated shelf, the drawers include a total of 6 divider bars. These fit in the drawers where they act as braces for full size or fractional pans. Drawers provide excellent organization for your food pans and can help maximize your kitchen's workflow. Drawers also allow you to quickly pull ingredients for faster operation and ease of use. Easily reconfigure or remove the braces to best suit your inventory.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 2/5 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The sidemounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

▲ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.