

Item #: 178SSUD2R Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UD-2R 67" Stainless Steel Extra Deep Undercounter Refrigerator

Item #178SSUD2R



### Technical Data

Width	67 15/16 Inches
Depth	31 1/2 Inches
Height	34 7/16 Inches
Interior Width	47 11/16 Inches
Left Door Opening Width	22 1/16 Inches
Right Door Opening Width	22 1/16 Inches
Interior Depth	26 3/16 Inches
Interior Height	22 7/8 Inches
Work Surface Height	35 1/4 Inches
Amps	5.1 Amps

### Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel interior
- Side mounted compressor and digital temperature controller allow for greater depth of storage
- Cabinet section can accept full size bun pans
- Two epoxy-coated steel shelves accommodate up to 88 lb. each
- 115V; 2/5 hp

### Certifications



ETL Sanitation



ETL, US




5-15P

## Technical Data

Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	439 Watts
Access Type	Doors
BTU (LBP)	974 BTU
Capacity	16.4 cu. ft.
Capacity (per Shelf)	88 lb.
Compressor Location	Side Mounted
Door Style	Swing
Door Type	Solid
Features	Removable Magnetic Door Gaskets
Horsepower	2/5 hp
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.5 oz.
Refrigerant Type	R-290
Sections	2 Sections
Starting Amps	15.3 Amps
Starting Wattage	1317 Watts
Temperature Range	33 - 40 Degrees F
Top Capacity	353 lb.
Type	Refrigerators Undercounter Refrigerators

## Plan View

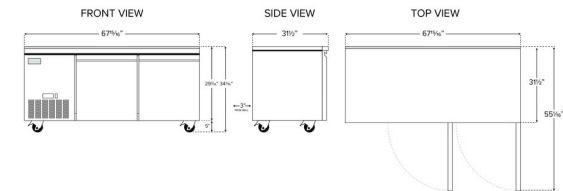

178SSUD2R



## Notes & Details

Make cold food storage as convenient as possible with the Avantco SS-UD-2R 67" extra deep undercounter refrigerator. With a spacious refrigerated portion readily accessible through its two doors, the unit opens up to two shelves to help you organize your ingredients and best utilize the 16.4 cu. ft. interior. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 2/5 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The side-mounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).