

Item #: 178SSUD3RH Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco 93" Stainless Steel Six Drawer Extra Deep Undercounter Refrigerator

Item #178SSUD3RH



### Technical Data

|                   |                 |
|-------------------|-----------------|
| Width             | 93 13/16 Inches |
| Depth             | 31 1/2 Inches   |
| Height            | 34 7/16 Inches  |
| Power Cord Length | 98 Inches       |
| Interior Width    | 73 1/2 Inches   |
| Packaging Width   | 96 9/16 Inches  |
| Interior Depth    | 26 3/16 Inches  |
| Packaging Depth   | 34 1/4 Inches   |
| Interior Height   | 22 7/8 Inches   |
| Packaging Height  | 36 1/4 Inches   |

### Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel interior
- Foamed-in-place polyurethane insulation maintains temperatures from 33 to 40 degrees Fahrenheit
- Easy-to-read digital temperature controller
- Includes 6 easy-open drawers and 18 divider bars to fit full size and fractional pans
- 115V; 1/4 hp

### Certifications



ETL, US



ETL Sanitation




5-15P

## Technical Data

|                             |   |
|-----------------------------|---|
| Work Surface Height         | 35 1/4 Inches   |
| Amps                        | 5.7 Amps  |
| Hertz                       | 60 Hz   |
| Phase                       | 1 Phase   |
| Voltage                     | 115 Volts   |
| Wattage                     | 524 Watts   |
| Access Type                 | Drawers   |
| BTU (LBP)                   | 1285 BTU  |
| Capacity                    | 25.4 cu. ft.  |
| Capacity (per Shelf)        | 90 lb.  |
| Compressor Style            | Side / Rear Breathing   |
| Door Type                   | Solid   |
| Features                    | Automatic Electric Defrost<br>Digital Temperature Controller<br>Removable Magnetic Drawer Gaskets |
| Hinge Location              | Left<br>Right   |
| Horsepower                  | 1/4 hp  |
| Insulation Material         | Polyurethane Foam   |
| Material                    | Stainless Steel   |
| Maximum Ambient Temperature | 90 Degrees F  |
| Net Weight                  | 342 lb.   |
| Number of Drawers           | 6 Drawers   |
| Plug Type                   | NEMA 5-15P  |
| Refrigerant Type            | R-290   |
| Sections                    | 3 Sections  |
| Starting Amps               | 17.1 Amps   |
| Starting Wattage            | 1572 Watts  |
| Style                       | Counter Height  |
| Temperature Range           | 33 - 40 Degrees F   |
| Top Capacity                | 353 lb.   |
| Type                        | Refrigerators<br>Undercounter Refrigerators   |

## Plan View

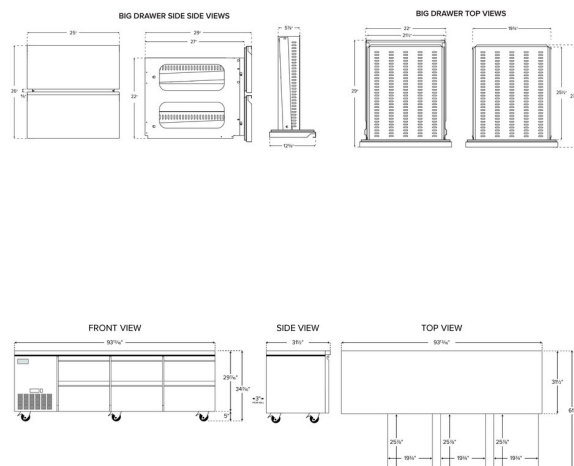

178SSUD38H



## Notes & Details

Make cold food storage as convenient as possible with the Avantco 93" extra deep undercounter six drawer refrigerator. With a spacious refrigerated portion readily accessible through 6 easy-sliding drawers, the unit opens up to 25.4 cu. ft. of refrigerated food storage. Plus, 18 divider bars are included. These fit in the drawers where they act as braces for full size or fractional pans. Reconfigure or remove the braces to best suit your inventory.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The side-mounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).