Item #:	178SSWD3R	Project:	



Qty: _____ Date: _____ Approval: _____

Avantco SS-WD-3R 93" Stainless Steel Extra Deep Worktop Refrigerator with 3 1/2" Backsplash

Item #178SSWD3R





Technical Data

Width93 13/16 InchesDepth31 1/2 InchesHeight38 InchesPower Cord Length98 InchesInterior Width73 1/4 InchesLeft Door Opening22 4/14 (Jackes)		
Height 38 Inches Power Cord Length 98 Inches Interior Width 73 1/4 Inches		
Power Cord Length 98 Inches Interior Width 73 1/4 Inches	31 1/2 Inches	
Interior Width 73 1/4 Inches		
	98 Inches	
Left Door Opening		
Width 22 1/16 Inches		
Middle Door Opening Width 22 1/16 Inches		
Right Door Opening Width 22 1/16 Inches		
Interior Depth 26 3/16 Inches		
Interior Height 22 7/8 Inches	22 7/8 Inches	

Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel • interior
- Side mounted compressor allows for greater depth of storage •
- 3 1/2" backsplash for wall protection •
- Three epoxy-coated steel shelves accommodate up to 88 lb. each •
- 115V; 1/2 hp

Certifications








Work Surface Height	35 1/4 Inches	
Amps	5.7 Amps	
Phase	1 Phase	
Voltage	115 Volts	
Wattage	524 Watts	
Access Type	Doors	
Backsplash	With Backsplash	
BTU (LBP)	1285 BTU	
Capacity	25.4 cu. ft.	
Compressor Location	Side Mounted	
Door Style	Swing	
Door Type	Solid	
Features	Removable Magnetic Door Gaskets Removable Magnetic Drawer Gaskets	
Horsepower	1/2 HP	
Individual Shelf Capacity	88 lb.	
Number of Doors	3 Doors	
Number of Shelves	3 Shelves	
Plug Type	NEMA 5-15P	
Refrigerant Capacity	3.5 oz.	
Refrigerant Type	R-290	
Starting Amps	17.1 Amps	
Starting Wattage	1572 Watts	
Temperature Range	33 - 40 Degrees F	
Top Capacity	353 lb.	

Plan View

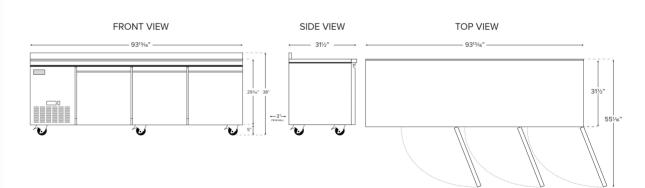



Make food preparation as convenient as possible with the Avantco 93" extra deep worktop refrigerator. With a spacious stainless steel worktop surface for slicing, dicing, assembling, mixing, and other food prep tasks, the unit features a 3 1/2" backsplash for wall protection and a refrigerated storage space below. The refrigerated portion is readily accessible through 2 drawers on the right and 2 doors on the left. Drawers provide excellent organization for your food pans and can help maximize your kitchen's workflow. Drawers also allow you to quickly pull ingredients for faster operation and ease of use. These doors each open to an epoxy-coated steel shelf to help organize product. Plus, 6 assorted divider bars are included, which fit in the drawers where they act as braces for full size or fractional pans. Easily reconfigure or remove the braces to best suit your inventory. Providing 25.4 cu. ft. of space in total, the refrigerator makes it easy to store fresh produce, condiments, and a range of other ingredients needed for the prep station.

This refrigerated unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use.

This worktop refrigerator ensures optimal performance by operating with a 1/2 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers!

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This worktop refrigerator requires a 115V electrical connection for operation.

A WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.