

ltem#:	178SSWT60RHC		Project:		
Otv.		Date:		Approval:	

Avantco SS-WT-60R-HC 60" Two Door Worktop Refrigerator with 3 1/2" **Backsplash**

Item #178SSWT60RHC







Technical Data

Width	60 1/4 Inches		
Depth	29 1/2 Inches		
Height	38 3/4 Inches		
Power Cord Length	84 Inches		
Interior Width	55 5/8 Inches		
Left Door Opening Width	25 11/16 Inches		
Right Door Opening Width	25 11/16 Inches		
Interior Depth	22 7/8 Inches		
Interior Height	23 1/2 Inches		
Work Surface Height	35 1/4 Inches		

Features

- Strong and sleek 430 type stainless steel exterior with 3 1/2" backsplash
- 304 type stainless steel interior maintains temperatures from 33 to 40 degrees
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/3 hp; 1.33 Amps

Certifications










Technical Data

Amps	1.33 Amps	
Hertz	60 Hertz	
Phase	1 Phase	
Voltage	115 Volts	
Access Type	Doors	
Backsplash	With Backsplash	
BTU (LBP)	881 BTU	
Capacity	14.2 cu. ft.	
Compressor Location	Rear Mounted	
Compressor Style	Side / Rear Breathing	
Door Style	Swing	
Door Type	Solid	
Features	Removable Magnetic Door Gaskets	
Hinge Location	Left/Right	
Horsepower	1/3 HP	
Individual Shelf Capacity	88 lb.	
Number of Doors	2 Doors	
Number of Shelves	2 Shelves	
Plug Type	NEMA 5-15P	
Refrigerant Capacity	3.5 oz.	
Refrigerant Type	R-290	
Style	Counter Height	
Temperature Range	33 - 40 Degrees F	
Top Capacity	441 lb.	

Plan View

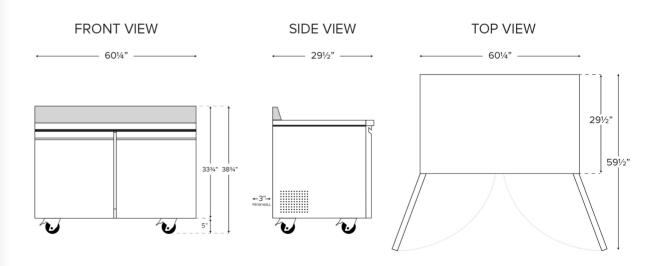



Notes & Details

Make food preparation as convenient as possible with the Avantco SS-WT-60R-HC 60" worktop refrigerator. With a spacious stainless steel worktop surface for slicing, dicing, assembling, mixing, and other food prep tasks, the unit features a 3 1/2" backsplash for wall protection and a refrigerated storage space below. The refrigerated portion is readily accessible through the three doors, which open up to three shelves to help you organize your ingredients and best utilize the spacious interior. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from fresh produce to sauces, glazes, and other specialty condiments and garnishes.

This refrigerated unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use.

This worktop refrigerator ensures optimal performance by operating with a 1/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers!

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This worktop refrigerator requires a 115V electrical connection for operation.

MARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.