

Item #: 178SSWT72RA Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-WT-72R-HC 72" Three Door Stainless Steel ADA Height Worktop Refrigerator with 3 1/2" Backsplash

Item #178SSWT72RA



### Technical Data

|                     |               |
|---------------------|---------------|
| Width               | 71 1/2 Inches |
| Depth               | 29 1/2 Inches |
| Height              | 37 1/8 Inches |
| Power Cord Length   | 84 Inches     |
| Interior Width      | 66 7/8 Inches |
| Interior Depth      | 22 7/8 Inches |
| Interior Height     | 23 1/2 Inches |
| Work Surface Height | 33 5/8 Inches |
| Amps                | 2.7 Amps      |
| Hertz               | 60 Hz         |

### Features

- 2 1/2" casters make moving simple for easy cleaning and bring the unit to an ADA-compliant working height
- Strong and sleek type 430 stainless steel exterior with 3 1/2" backsplash and type 304 stainless steel interior
- Foamed-in-place polyurethane maintains temperatures from 33 to 40 degrees Fahrenheit
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/3 hp
- Note: only the worktop refrigerator holds the ETL certification

### Certifications



ADA Compliant



ETL, US



5-15P




ETL Sanitation


## Technical Data

|                     |  |
|---------------------|--|
| Phase               | 1 Phase  |
| Voltage             | 115 Volts  |
| Wattage             | 290 Watts  |
| Access Type         | Doors  |
| Backsplash          | With Backsplash                                  |
| BTU (LBP)           | 881 BTU  |
| Capacity            | 16.9 cu. ft.                                     |
| Color               | Silver   |
| Compressor Location | Rear Mounted                                     |
| Compressor Style    | Side / Rear Breathing                            |
| Door Style          | Swing  |
| Door Type           | Solid  |
| Features            | ADA Compliant<br>Removable Magnetic Door Gaskets |
| Hinge Location      | Left<br>Right                                    |
| Horsepower          | 1/3 hp   |
| Number of Doors     | 3 Doors  |
| Number of Shelves   | 3 Shelves  |
| Plug Type           | NEMA 5-15P                                       |
| Refrigerant Type    | R-290  |
| Sections            | 3 Sections                                       |
| Starting Amps       | 8.1 Amps   |
| Starting Wattage    | 870 Watts  |
| Style               | ADA Height                                       |
| Temperature Range   | 33 - 40 Degrees F                                |
| Top Capacity        | 441 lb.  |

## Plan View

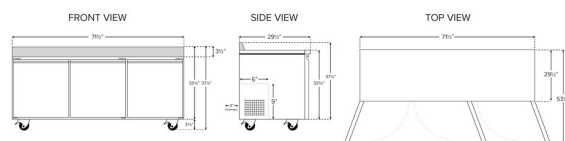

1785SW172RA

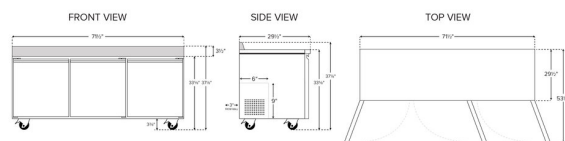



## Notes & Details

Optimize the space behind your bar by adding refrigerated storage with this Avantco SS-WT-72R-HC 72" back bar refrigerator! Providing 7.8 cu. ft. of interior storage space, the unit houses one epoxy-coated shelf that accommodates up to 90 lb. The epoxy-coated steel shelf is perfect for storing and organizing drinks for your bar service, from bottles of ale to bottles of cider.

The interior, made of strong 304 type stainless steel, is accessible through the glass door. Because it's made of glass, the door provides excellent product visibility, enabling you to easily view your current drink or ingredient selection for efficient drink preparation. For overall durability, the unit's exterior is made with sleek stainless steel and is topped with a type 304 stainless steel surface. This unit also comes with a 2 year Parts and Labor Warranty for long-lasting quality assurance and peace of mind.

This back bar refrigerator ensures optimal performance by operating with a 1/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 -40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation provides the refrigerator with additional structural integrity and ensures that all beverages held in the unit remain at cool temperatures and are ready for immediate service to customers! The unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).