

Item #: 178SSWT72RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-WT-72R-HC 72" Three Door Worktop Refrigerator with 3 1/2" Backsplash

Item #178SSWT72RHC



Technical Data

Width	71 1/2 Inches
Depth	29 1/2 Inches
Height	38 3/4 Inches
Power Cord Length	84 Inches
Interior Width	66 7/8 Inches
Left Door Opening Width	19 7/16 Inches
Middle Door Opening Width	19 5/8 Inches
Right Door Opening Width	19 7/16 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches

Features

- Strong and sleek 430 type stainless steel exterior with 3 1/2" backsplash
- 304 type stainless steel interior maintains temperatures from 33 to 40 degrees Fahrenheit
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/3 hp

Certifications



ETL, US



5-15P




ETL Sanitation

Technical Data

Work Surface Height	35 1/4 Inches
Amps	2.7 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	290 Watts
Access Type	Doors
Backsplash	With Backsplash
BTU (LBP)	881 BTU
Capacity	16.9 cu. ft.
Capacity (per Shelf)	88 lb.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Features	Removable Magnetic Door Gaskets
Hinge Location	Left Right
Horsepower	1/3 hp
Number of Doors	3 Doors
Number of Shelves	3 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.5 oz.
Refrigerant Type	R-290
Starting Amps	8.1 Amps
Starting Wattage	870 Watts
Style	Counter Height
Temperature Range	33 - 40 Degrees F
Top Capacity	441 lb.

Plan View

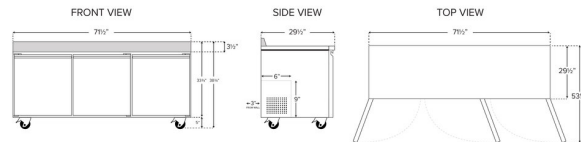

1785SWT2RH-C



Notes & Details

Optimize the space behind your bar by adding refrigerated storage with this Avantco SS-WT-72R-HC 72" back bar refrigerator! Providing 7.8 cu. ft. of interior storage space, the unit houses one epoxy-coated shelf that accommodates up to 88 lb. The epoxy-coated steel shelf is perfect for storing and organizing drinks for your bar service, from bottles of ale to bottles of cider.

The interior, made of strong 304 type stainless steel, is accessible through the solid door. For overall durability, the unit's exterior is made with sleek stainless steel and is topped with a type 304 stainless steel surface. This back bar refrigerator ensures optimal performance by operating with a 1/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 -40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation provides the refrigerator with additional structural integrity and ensures that all beverages held in the unit remain at cool temperatures and are ready for immediate service to customers! The unit requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.