

Item #: 178UBB1HCS Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco UBB-1-HC-S 23" Stainless Steel Solid Door Back Bar Refrigerator

Item #178UBB1HCS



### Technical Data

Width	23 1/2 Inches
Depth	30 3/4 Inches
Height	38 3/4 Inches
Power Cord Length	96 Inches
Interior Width	19 1/2 Inches
Left Door Opening Width	19 11/16 Inches
Packaging Width	26 Inches
Shelf Width	18 7/8 Inches
Interior Depth	18 1/8 Inches
Nominal Depth	Standard

### Features

- 1 1/2" thick stainless steel countertop with stainless steel interior and exterior
- Casters included provide easy mobility for cleaning and organizing kitchen and bar workflow
- One adjustable epoxy-coated steel shelves can accommodate up to 88 lb.
- Preprogrammed digital temperature controls featuring auto-defrost function for easy setup and mainte
- 115V; 1/4 hp; R290 refrigerant

### Certifications



5-15P



ETL, US




ETL Sanitation

## Technical Data

Packaging Depth	32 1/4 Inches
Shelf Depth	23 7/8 Inches
Interior Height	28 5/8 Inches
Packaging Height	45 Inches
Amps	1.92 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Wattage	216 Watts
Access Type	Doors
BTU (LBP)	666 BTU
Capacity	7.8 cu. ft.
Casters	With Casters
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Countertop Type	Stainless Steel
Door Style	Swing
Door Type	Solid
Exterior Finish	Stainless Steel
Features	Automatic Electric Defrost Casters Digital Temperature Controller Food Rated Removable Magnetic Door Gaskets
Horsepower	1/4 HP
Individual Shelf Capacity	88 lb.
Insulation Material	Polyurethane Foam
Material	Stainless Steel
Maximum Ambient Temperature	90 Degrees F
Net Weight	132 lb.
Number of 12 oz. Bottles	105 Bottles
Number of 12 oz. Cans	95 Cans
Number of Doors	1 Doors
Number of Kegs	1 Keg
Number of Shelves	1 Shelf
Plug Type	NEMA 5-15P
Refrigerant Capacity	2.1 oz.
Refrigerant Type	R-290
Shelf Material	Epoxy-Coated Steel
Starting Amps	5.76 Amps
Starting Wattage	648 Watts
Temperature Range	33 - 40 Degrees F
Top Capacity	176 lb.
Top Type	Counter Height

## Plan View

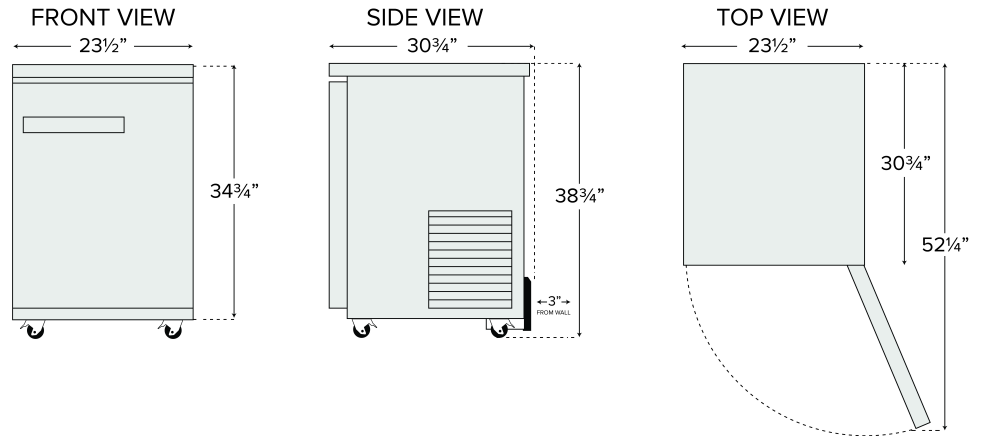

## Notes & Details

Optimize the space behind your bar by adding refrigerated storage with this Avantco UBB-2-HC 59" stainless steel counter height solid door back bar refrigerator! Providing 19.4 cu. ft. of interior storage space, the unit comes with one shelf that accommodates up to 88 lb. or (2) 1/2 kegs total. They're even illuminated by bright LED lighting for optimal product visibility. The epoxy-coated steel shelves are perfect for storing and organizing heavy bulk ingredients for your bar service, from bottles of ale to bottles of cider. Plus, since the unit is rated to safely store food products, it provides versatility and helps you maximize the space you have available.

The interior, made of strong 304 type stainless steel, is accessible through a solid door. For overall durability, the unit's exterior is made with stainless steel and is topped with a type 304 stainless steel surface.

This back bar refrigerator ensures optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3, making it an energy-efficient choice for your business. The foamed-in-place polyurethane insulation provides the refrigerator with additional structural integrity and ensures that all products held in the unit remain at cool temperatures and are ready for immediate service to customers!

Delivering ease of use and maintenance, the refrigerator is easy to adjust with a digital temperature controller and features automatic defrost. Overall, the unit requires a 115V electrical connection for operation and even comes with adjustable feet for simple, convenient leveling.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).