



Item #: 178Z2RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco Z2-R-HC 54" Solid Door Stainless Steel Reach-In Refrigerator

Item #178Z2RHC



Technical Data

| | |
|--------------------------|-----------------|
| Width | 54 Inches |
| Depth | 32 3/16 Inches |
| Height | 81 11/16 Inches |
| Interior Width | 49 3/8 Inches |
| Left Door Opening Width | 22 9/16 Inches |
| Right Door Opening Width | 22 9/16 Inches |
| Interior Depth | 27 1/8 Inches |
| Interior Height | 56 11/16 Inches |
| Amps | 4.2 Amps |
| Hertz | 60 Hertz |

Features

- Corrosion-resistant stainless steel interior and exterior
- Features self-closing and stay-open locking solid doors
- Versatile shelf supports can hold full-size food pans and perforated rear plenum promotes airflow
- Cabinet and maintenance alarms will sound and display on Carel iJ controller
- R-290 refrigerant; 115V; 1/2 hp; 4.2 Amps; 3 Year Parts and Labor

Certifications




Avantco Refrigeration

Technical Data

| | |
|---------------------------|--|
| Phase | 1 Phase |
| Voltage | 115 Volts |
| Wattage | 456 Watts |
| Access Type | Doors |
| Capacity | 43.93 cu. ft. |
| Casters | With Casters |
| Color | Silver |
| Compressor Location | Top Mounted |
| Construction | All Stainless Steel |
| Door Style | Swing |
| Door Type | Solid |
| Dutch Half Doors | Without Dutch Half Doors |
| Features | Automatic Electric Defrost Digital Display Electronic Controller Energy Star Qualified Removable Magnetic Door Gaskets Self-Closing Doors |
| Hinge Location | Left/Right |
| Horsepower | 1/2 HP |
| Individual Shelf Capacity | 120 lb. |
| Installation Type | Freestanding |
| Number of Compressors | 1 Compressor |
| Number of Doors | 2 Doors |
| Number of Shelves | 6 Shelves |
| Number of Tray Slides | 6 |
| Plug Type | NEMA 5-15P |
| Refrigerant Capacity | 3.2 oz. |
| Refrigerant Type | R-290 |
| Sections | 2 Sections |
| Temperature Range | 33 - 40 Degrees F |
| Type | Refrigerators |

Plan View

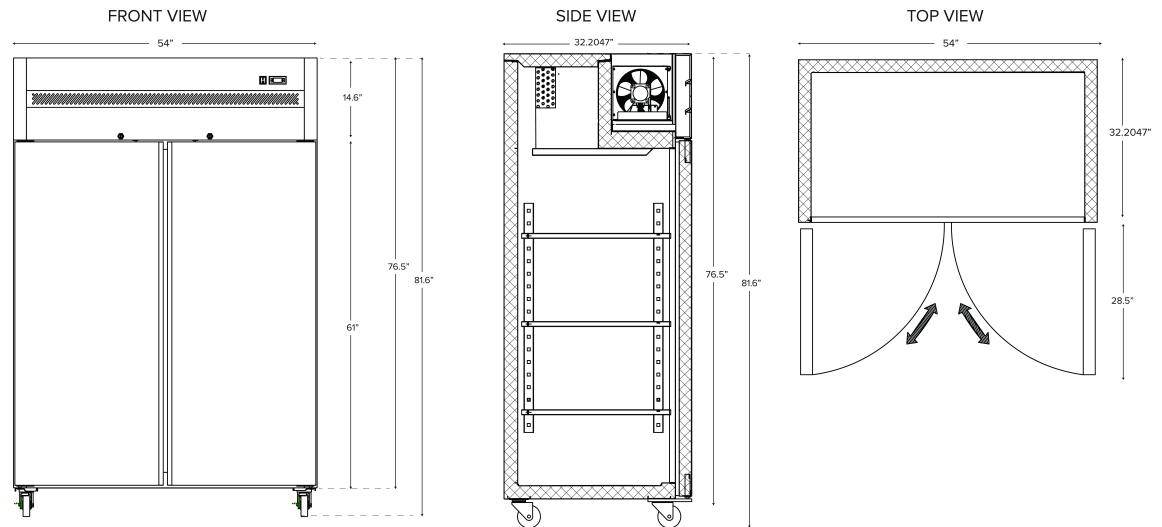



Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco Z2-R-HC 54" solid door stainless steel reach-in refrigerator, you receive performance you can depend on! A corrosion-resistant, all-stainless steel interior and exterior construction provides increased durability and a sleek appearance. The self-closing and stay-open locking solid doors give your staff the ability to more quickly and easily load your refrigerator when you get a delivery. Plus, a door open alarm alerts users to when the doors have been open for too long to keep your inventory safe and fresh.

This model features 6 plastic-coated steel shelves that fit in the refrigerator's pan slides. These slides fit full-size food pans (sold separately) and hold 33% more weight than shelf clips to make loading and unloading a breeze! The full-length U-shaped door handles further expedite the loading process. Thanks to the rear air duct, this model has exceptional air circulation. Included casters allow users to easily move and clean under the unit.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a top-mounted 1/2 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the top-mounted compressor is further from the floor than on a bottom-mounted unit; meaning it'll get less dirty and won't be accidentally kicked. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include the state-of-the-art Carel iJ controller, automatic defrosting, and digital temperature control with digital display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.