



BEVERAGE-AIR®

PROJECT: _____
 ITEM # _____ QTY: _____
 MODEL # _____
 AIA # _____ SIS # _____
 APPROVED: _____

BAR EQUIPMENT - COMPACTED

Model: BB24HC-1-B

BACK BAR / SOLID DOORS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Mechanical control
- 1 1/2" Stainless steel top
- Two (2) epoxy coated wire shelves
- Self-closing door with 120° stay-open feature
- Door lock
- Field reversible door (hinge kit not included)
- LED lighting
- Magnetic gaskets provide positive door seal
- Packaged products only
- 4" Heavy duty casters two (2) with locks
- Balanced, forced air refrigeration system provides rapid chilling of product



OPTIONS & ACCESSORIES


- Wine model (40°-60° models)
- Underbar model option
- Galvanized sub-top

REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F




PLAN VIEW

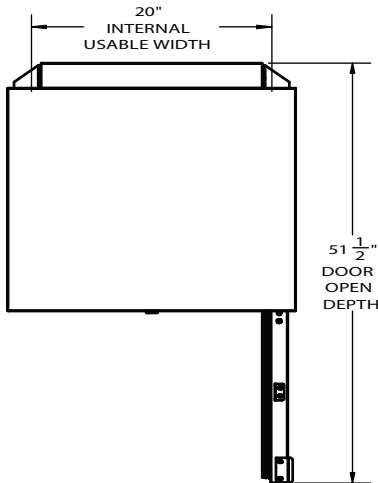

ELEVATION VIEW

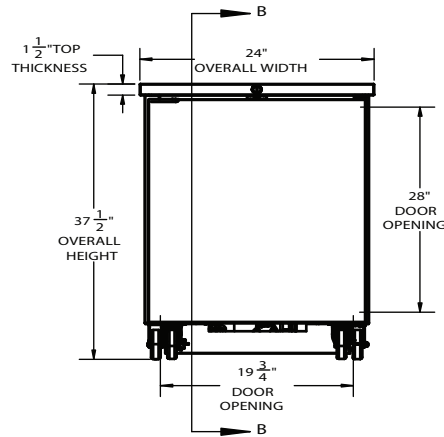

SIDE VIEW

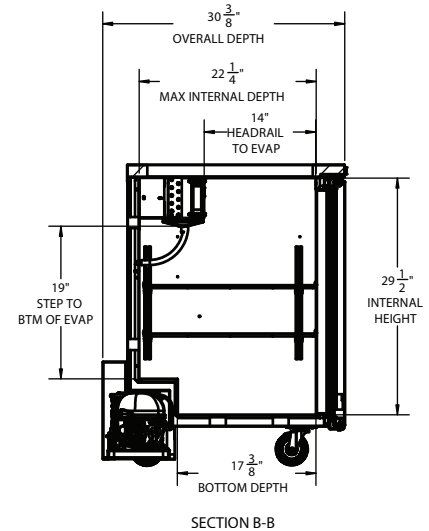

EXTERNAL DIMENSIONAL DATA

| | |
|-------------------------------|---------------|
| Width Overall (in) | 24" |
| Depth Overall (in) | 30 3/8" |
| Height Overall (in) | 37 1/2" |
| Number of Doors | 1 |
| Depth with Door open 90° (in) | 51 1/2" |
| Door Openings (in) | 19 3/4" x 28" |

INTERNAL DIMENSIONAL DATA

| | |
|------------------------------|---------|
| NET Capacity (cubic ft.) | 7.66 |
| Internal Width Useable (in) | 20" |
| Internal Depth Overall (in) | 22 1/4" |
| Internal Height Overall (in) | 29 1/2" |
| Number of Shelves | 2 |
| Number of 1/2 Kegs | 1 |

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA

| | |
|---------------------|----------|
| Full Load Amps | 2 |
| Voltage | 115/60/1 |
| Nema Plug (8' cord) | 5-15P |

REFRIGERATION DATA

| | |
|---------------------------|--------------------|
| Horsepower | 1/6 |
| Capacity (BTU/Hr) | 1094 |
| Heat Rejection (BTU/Hr) | 1641 |
| Charge (lbs/grams/ounces) | 0.1213 / 55 / 1.94 |

SHIPPING DATA

| | |
|-----------------------|----------|
| Gross Weight - Crated | 186 lbs. |
| Height - Crated (in) | 46" |
| Width - Crated (in) | 27" |
| Depth - Crated (in) | 32" |



115/60/1
NEMA 5-15P

ELECTRICAL CONNECTION

Unit pre-wired at factory and include 8' long cord and plug set.