





SlowStop® Rebounding Bollard – 4” (SS4Y-42) Generation 3

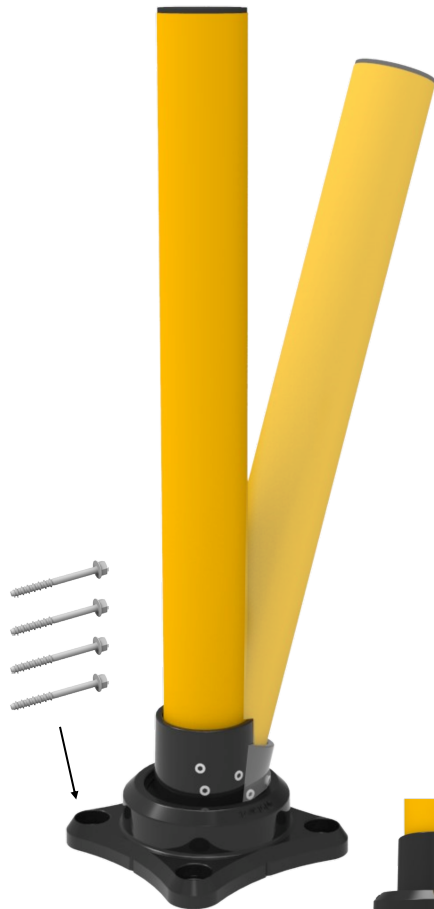

Installs with four (4) 5/8” x
5-1/2”
Concrete Screw Anchors



New Recessed Anchors—protects from
fork and cantilever arm impacts.

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4” (3.5” ANSI Schedule 40 or Equiv.)
Height: 42”

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

MASS (LBS)	1000	2000	3000	4000	5000	7500	10000	12500	15000
SPEED (MPH)									
1.0									
1.5									
2.0									
2.5									
3.0									
3.5									
4.0									
4.5									
5.0									
5.5									
6.0									
6.5									

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

SPECIFICATIONS

- Stopping Power: 5,334 joules / 3,934 ft-lb
- No-Damage Rating: 2,667 joules / 1,967 ft-lb.
- Meets IBC 1607.8.3 requirements to resist 6,000 pounds of force at 27” height
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

RECOMMENDED USES

- Medium Duty
- Concrete Only
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2021 SlowStop. All rights reserved.