




A WATTS Brand

- Standard Model 781-1824 (18" x 24") **BradEX**
- Standard Model 781-1830 (18" x 30") **BradEX**
- Standard Model 781-1836 (18" x 36") **BradEX**
- Standard Model 781-18362 (18" x 36", tempered glass) **BradEX**
- Standard Model 781-2430 (24" x 30") **BradEX**
- Standard Model 781-2436 (24" x 36") **BradEX**
- Standard Model 781-24362 (24" x 36", tempered glass) **BradEX**
- Standard Model 781-2448 (24" x 48") **BradEX**
- Standard Model 781-2460 (24" x 60") **BradEX**
- Standard Model 781-XXX (Specify width and height)

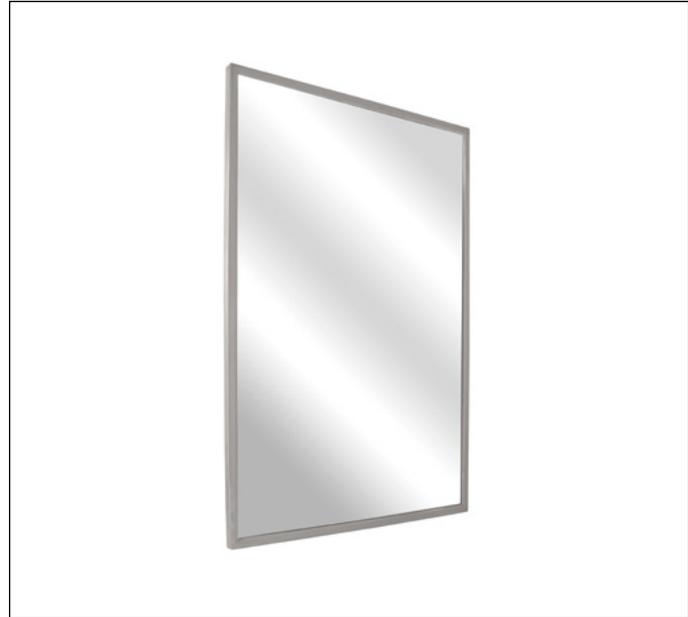

**Product Materials**

**FRAME:** One-piece, roll-formed stainless steel with bright annealed finish. Channel is 3/4" x 3/4" x 7/16" with 90° mitered corners. Double strength continuous integral stiffener on all sides for added strength.

**BACK:** Galvanized steel.

**MIRROR:** First quality 1/4" float glass, thermosetting infrared cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. All edges protected by shock-absorbing, neoprene tubing. The back of the mirror is protected by a sheet of 1/4" extruded polystyrene, which is placed between the mirror and the galvanized steel.

**MOUNTING BRACKETS:** 18 gauge cold rolled steel.

**Installation**

Verify all rough-in dimensions prior to installation. Secure concealed mounting bracket to wall with screws (not included) at holes provided. Mounting kits available through Bradley (ref. #899-026). For more information, visit [bradleycorp.com](http://bradleycorp.com). Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs Slide mirror down and lock into position.

**Guide Specification**

Mirror shall be framed with one-piece, roll-formed stainless steel with 3/4" face and neatly mitered corners. Double -strength continuous integral stiffener on all sides. Back of unit shall be galvanized steel. Separate brackets for concealed mounting. Mirror shall be of first quality 1/4" polished float glass, guaranteed for 15 years against silver spoilage and protected by shock-absorbing, neoprene tubing with Poly-Glaze protective finish.

**Framed Mirror shall be Bradley Model 781- \_\_\_\_\_ " W x \_\_\_\_\_ " H (specify width and height).**

**ADA Compliant**

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

**Optional Features**

| Features  | Suffix |
|---|--------|
| 1/4" tempered glass mirror in lieu of polished float glass mirror*  | -2     |
| Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror | -4     |

\*Either the Length (L) or the Width (W) must be greater than 25".

- An inherent characteristic of a manufacturing process for tempered glass is distortion which may vary from mirror to mirror.
- Stainless steel mirrors will differ in optic quality from glass mirrors.
- In larger sizes, stainless mirrors are subject to distortion and/or "oil canning" for which Bradley Corporation cannot accept responsibility.
- Bradley mirrors are not field interchangeable from horizontal to vertical or vice versa. Always specify width first.


Orders composed of products indicated as **BradEX** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.





A WATTS Brand

Dimensions

MIRRORS 30" WIDE AND UNDER

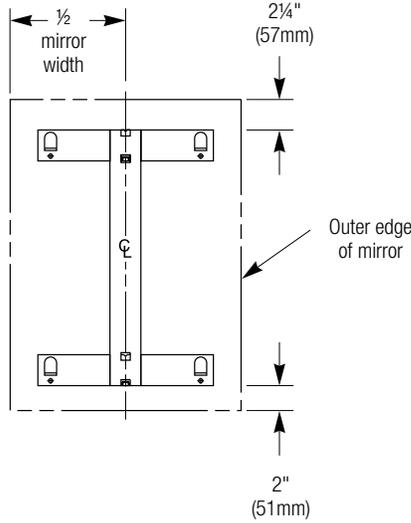

MIRRORS OVER 30" WIDE

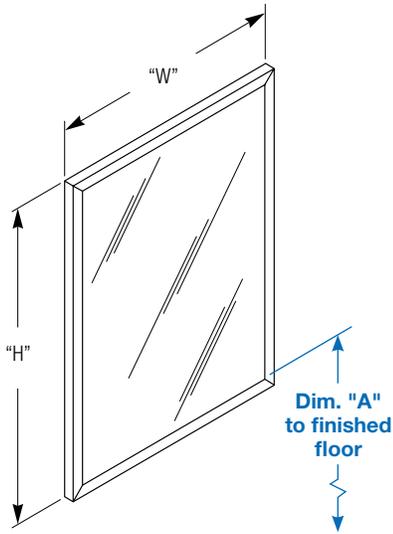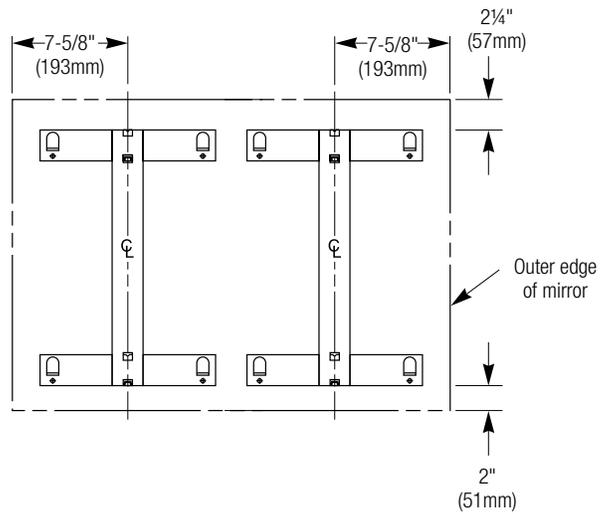

BradEX® Models

| Width (Inches) W | Height (Inches) H | Overall Dimension (Inches) | Overall Dimensions (Millimeters) | Standard Model Number |
|------------------|-------------------|----------------------------|----------------------------------|-----------------------|
| 18"              | 24"               | 18 x 24                    | 457 x 610                        | 781-1824              |
| 18"              | 30"               | 18 x 30                    | 457 x 762                        | 781-1830              |
| 18"              | 36"               | 18 x 36                    | 457 x 914                        | 781-1836              |
| 18"              | 36"               | 18 x 36                    | 457 x 914                        | 781-18362             |
| 24"              | 30"               | 24 x 30                    | 610 x 762                        | 781-2430              |
| 24"              | 36"               | 24 x 36                    | 610 x 914                        | 781-2436              |
| 24"              | 36"               | 24 x 36                    | 610 x 914                        | 781-24362             |
| 24"              | 60"               | 24 x 60                    | 610 x 1524                       | 781-2460              |
| 24"              | 48"               | 24 x 48                    | 610 x 1219                       | 781-2448              |
| 36"              | 36"               | 36 x 36                    | 914 x 914                        | 781-3636              |

Model 781 series channel-framed mirrors can be fabricated to fit a maximum size of 120"W x 72"H.

| Dim. "A" Key Surface:  | For Dim. "A"                                  | Bottom of Unit  |
|--|---|-----------------|
| Mirror's bottom edge of the reflecting surface to finished floor | 40" (1016mm)                                  | 39 1/4" (997mm) |
|  | 37" (940mm)                                   | 36 1/4" (921mm) |
|  | 34" (864mm)                                   | 33 1/4" (845mm) |
| <b>Rough wall opening:</b>                                       |   |                 |
| Surface Mount:   | No rough wall opening, see overall dimensions |                 |

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.