ULTRA NX, 120V WHT/SST FLAT LID

Height: 29.5" Width: 16.6" Depth: 26.4" (74.9cm) (42.2cm) (67.1cm)



- Patented beverage monitoring technology and reversing auger design ensure consistent, great tasting frozen beverages
- Enhanced auger drive system and seal design for long-lasting, reliable performance
- New leak capture feature helps reduce service costs and clean-up time
- BUNNlink compatible
- Two large product hoppers hold 3 gallons (11.4L) each to maximize serving capacity
- User interface communicates need for cleaning and maintenance
- Low-product alert to minimize product outages
- · Quick defrost feature to ensure beverage quality and maximize uptime
- USB for easy software updates and downloads
- Optional faucet available for dispensing chilled (non-frozen) products
- Sanitation listings NSF 18 and NSF 6 (Dairy)
- R290 all-natural refrigerant provides a sustainable platform with extremely low Global Warming Potential

Agency:





Specifications

Product #: 58000.0002

Autofill: None Flavors: 2 Flavors

Finish: Stainless/White

Hoppers: Two

Refrigerant: R290

Dispense: Pull & Hold

Handle: Extended Handle

Electrical & Capacity

Volts*		Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
	120	12	1440	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI kPa		Fitting Supplied	Water Flow Required (GPM)					
-	-	-	-					


CAD Drawings


Additional Features


2D	Revit	KLC		
•				


MARNING:







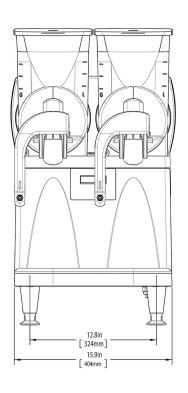

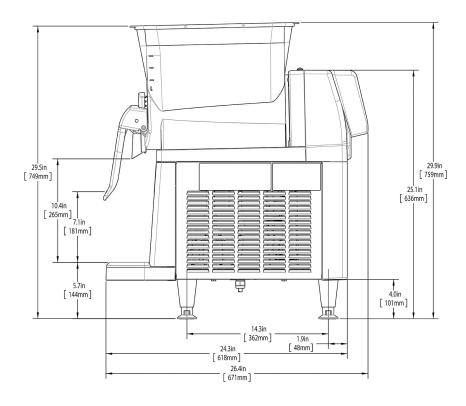

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	29.5 in.	16.6 in.	26.4 in.	43.9 in.	20.5 in.	25.9 in.	110.000 lbs	13.468 ft³	
Metric	74.9 cm	42.2 cm	67.1 cm	111.4 cm	52.1 cm	65.7 cm	49.896 kgs	0.381 m³	



Related Products & Accessories: ULTRA NX, 120V WHT/SST FLAT LID(58000.0002)

FILTER, AIR 13.562 X HANDLE, FAUCET KIT, FAUCET SEALS -KIT, HDL LOCK ULTRA-2 11.062 MAGNETIC ULTRA BLK NYLON AM **ULTRA-2 SEALS** Product #: 28122.0002 Product #: 32265.0003 Product #: 32268.1000 Product #: 34996.0004 HANDLE, EXTENDED DRIP TRAY COVER, KIT,LID & HDL LOCK DRIP TRAY ASSY, BASE ULTRA NX BLK NYLON ULTRA-2 SST CLR W/ NX **ULTRA NX - WHT** ULTRA NX - WHT AMProduct #: 57659.1000 Product #: 57660.0000 Product #: 34996.0014 Product #: 44614.0004

KIT, PM ULTRA NX

Product #: 58054.0000



KIT, LID LOCK ULTRA-2

SST CLR W/ NX LID

Product #: 34996.0013

VALVE, FAUCET LIQUID

BLACK ULTRA NX

Product #: 57793.0001

Serving & Holding Options: ULTRA NX, 120V WHT/SST FLAT LID(58000.0002)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

