

SPECIFICATION SHEET

**AC to USB Mobile Device Charger, 5V 2A Output**

- Perfect for charging USB devices on the go
- Supports 2Amps
- Small, lightweight, travel-friendly design


Specifications: AC to USB Mobile Device Charger, 5V 2A Output

Electrical Characteristics:

Electrical Input:	100~240VAC, 50~60Hz, 0.28A
Output:	5.0V, 2100mA

Physical Characteristics:

Operating Temperature:	0°C—40°C; 5-90%RH (non-condensing)
Storage Temperature:	-20°C—85°C, 5-90%RH (non-condensing)

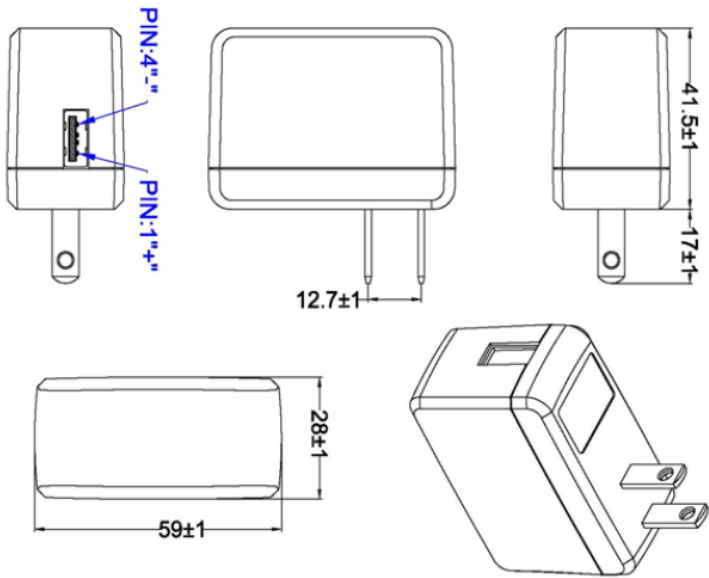

©2015 Legrand All Rights Reserved SpecSheet MSPEC_22335_R0

Part Number	Description	Weight (lbs)
22335	AC to USB Mobile Device Charger, 5V 2A Output	



Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.287.2843
www.c2g.com



C2G
AC to USB Mobile Device Charger, 5V 2A Output
Part No. CG-22335



The AC to USB Mobile Device Charger is an ideal solution for charging a mobile device which has a high power requirement, like the Apple® iPad®. This device is designed to connect to a standard AC wall outlet and provides two amps of charging power. Use the USB charging cable (not included) of the mobile device to connect to the standard USB A port of this device.

[Learn about the new](#)

Features & Benefits

Charges a USB device from any standard wall outlet

Provides two amps of charging power

Standard USB A output

Specifications

General Info

Product Line	C2G	Color	Black
UPC Number	757120223351	Country Of Origin	China
Features	USB-A Charging	Application Sector	Commercial, Residential
Type	Adapter		

Dimensions

Product Width US	1.1 in	Product Height US	1.63 in
Product Length US	2.32 in		

Listing Agencies / 3rd Party Agencies

CE Certified	Yes	FCC Compliant	Yes
--------------	-----	---------------	-----

Technical Information

Amperage	2 A	Connector 2	USB-A Female
Connector 1	NEMA 1-15 Male		