

SWITCHBOARD

TYPE 1050

CORRUGATED SWITCHBOARD

TYPE 1052

SMOOTH TOP SWITCHBOARD

1050 A.S.T.M CORRUGATED SWITCHBOARD

PROTECTION AGAINST ELECTRICAL SHOCK AROUND HIGH VOLTAGE APPARATUS
CONFORMS TO OSHA REQUIREMENTS & TESTED TO ASTM D-178/ANSI J6.7 TYPE II
MEETS ALL OPTIONAL REQUIREMENTS FOR OZONE, FLAME AND OIL RESISTANCE
PROOF TESTED AT 20,000 VOLTS AC MAXIMUM USE VOLTAGE 17,000 V AC RMS
DIELECTRIC TEST VOLTAGE – 30,000 AC RMS


1050 CORRUGATED SWITCHBOARD: 1/4" thick

Size	Estimated Weight
36" x 75 ft	380 lbs

Also available
in Special Cuts.

black

PROTECT
YOUR
PERSONNEL

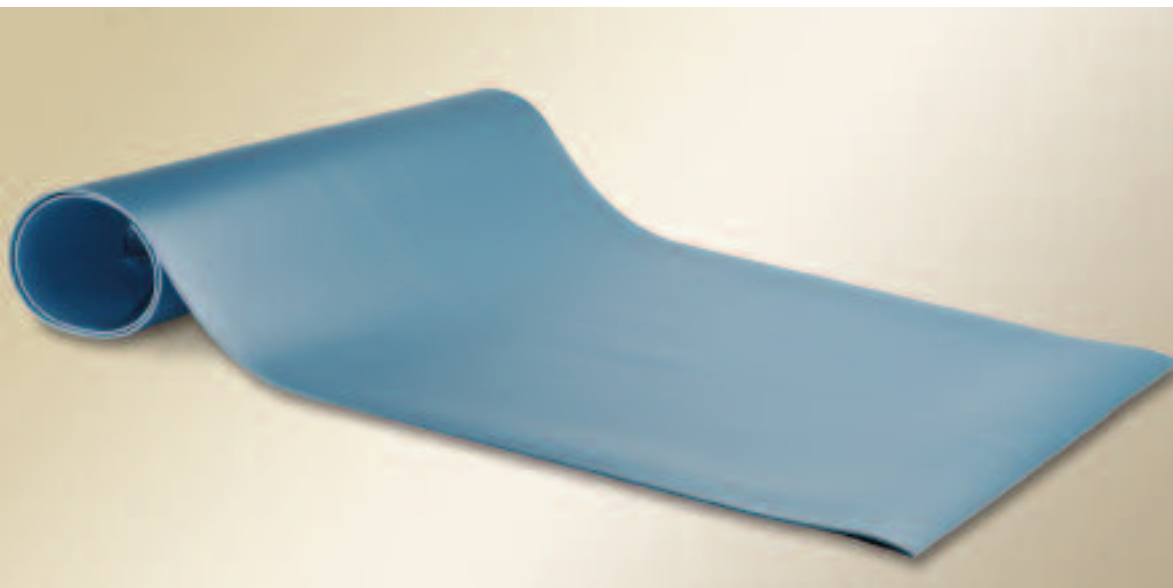

1052 SMOOTH TOP SWITCHBOARD

INSULATING FOR HIGH VOLTAGE APPLICATION NOT EXCEEDING 3,000 VOLTS
MEETS REQUIREMENTS FOR MIL-DTL-15562G, TYPE II DURABLE SMOOTH VINYL
FLAME AND ABRASION RESISTANT EASY TO CLEAN SMOOTH SURFACE

1052 SMOOTH TOP SWITCHBOARD: 1/8" thick

Size	Estimated Weight
36" x 75 ft	245 lbs

Also available
in Special Cuts.

black

blue