


Casters



	Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern
a.	C405	3" x 7/16"	Stem	Swivel	Polyurethane Wheel	180°	125	7/16" Stem
b.	C410	3" x 13/8"	Plate	Swivel	Polyolefin Wheel	140°	200	13/4" x 3"
c.	C430	4" x 1 1/2"	Plate	Swivel	Hi-temp Wheel (above 400°)	550° intermittent 425° continuous	400	13/4" x 3"
d.	C538	4" x 1 1/4"	Plate	Swivel	TPR Wheel,	140°	250	13/4" x 3"
e.	C539	4" x 1 1/4"	Plate	Swivel w/ brake	TPR Wheel	140°	250	13/4" x 3"
f.	C440	5" x 13/8"	Stem	Swivel w/ brake	Polyolefin Wheel	140°	300	1" Stem
g.	C447	5" x 13/8"	Stem	Swivel w/ brake	Polyolefin Wheel	140°	200	1/2" Stem
h.	C450	5" x 13/8"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"
i.	C453	5" x 1 1/4"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	225	13/4" x 3"
j.	C455	5" x 13/8"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"
k.	C460	5" x 13/8"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"
l.	C461	5" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	800	3" x 3"
m.	C464	5" x 2"	Plate	Rigid w/ brake	Polyolefin Hub, TPR Tread	120°	350	3" x 3"
n.	C480	5" x 1"	Stem	Swivel	Polyolefin Wheel	130°	135	7/16" Stem
o.	C482	5" x 13/8"	Stem	Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	7/16" Stem
p.	C483	5" x 13/8"	Stem	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	180°	250	7/16" Stem
q.	C485	5" x 1"	Stem	Swivel w/ brake	Polyolefin Wheel	130°	135	7/16" Stem
r.	C557	5" x 1 1/4"	Stem	Swivel	TPR Wheel, Synthetic Rig	150°	250	7/16" Stem
s.	C558	5" x 1 1/4"	Plate	Swivel	TPR Wheel, Synthetic Rig	150°	250	13/4" x 3"
t.	C558B	5" x 1 1/4"	Plate	Swivel w/brake	TPR Wheel, Synthetic Rig	150°	250	13/4" x 3"
u.	C566	5" x 13/8"	Plate	Swivel w/total lock	Polyolefin Hub, Polyurethane Tread	180°	350	13/4" x 3"

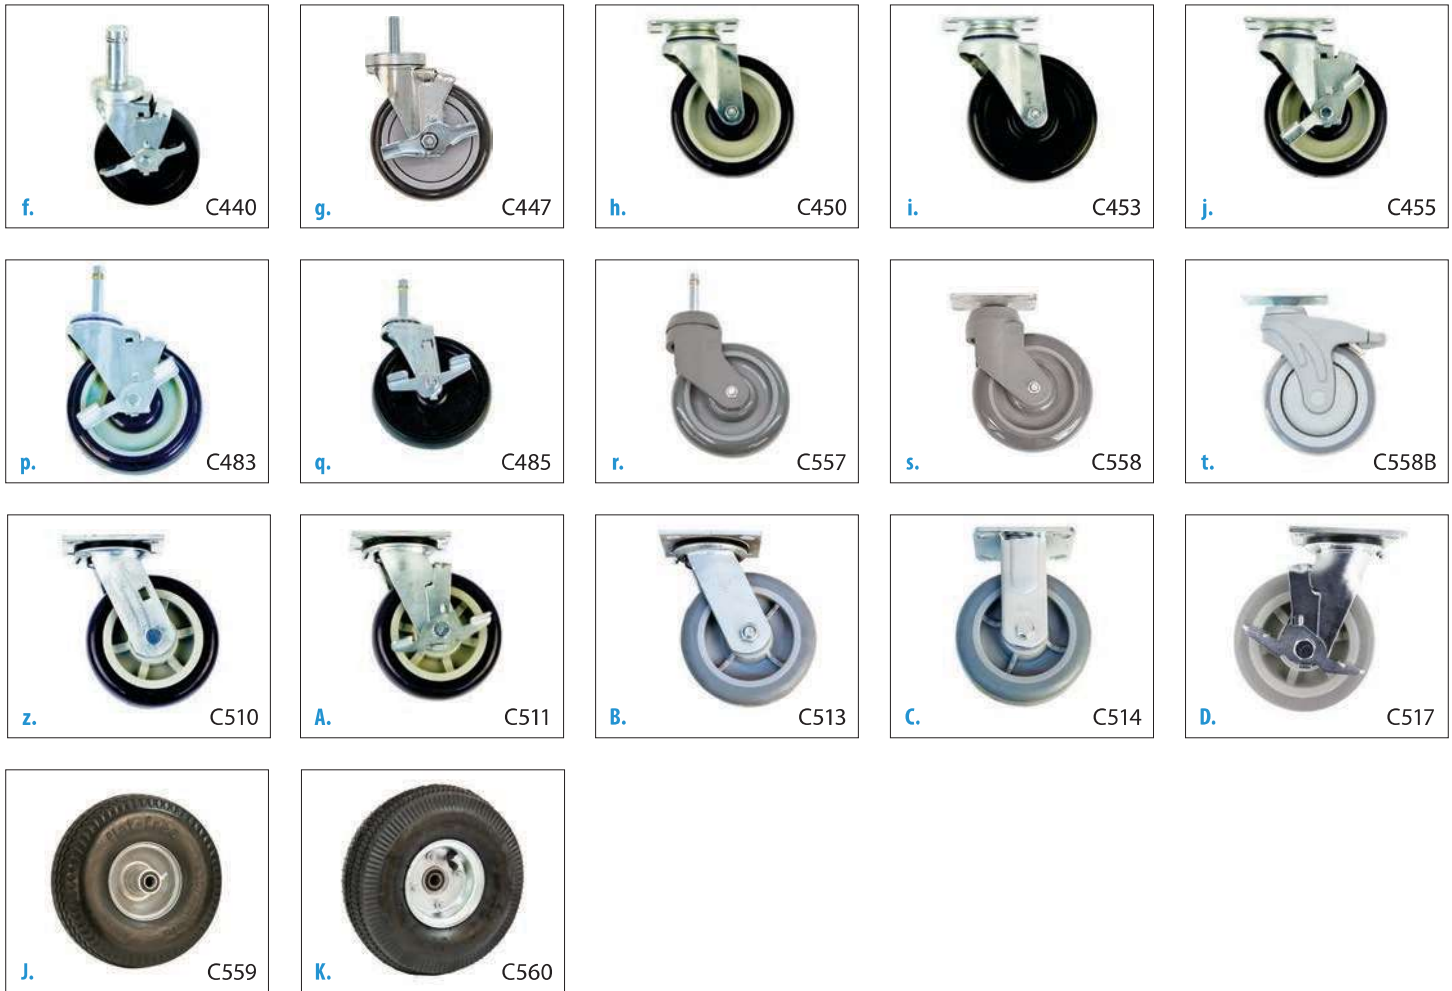

	Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern
v.	C418	6" x 2"	Plate	Swivel	K-Urethane Wheel	180°	700	3" x 3"
w.	C490	6" x 2"	Plate	Swivel	Polyolefin Wheel	190°	700	3" x 3"
x.	C495	6" x 2"	Plate	Swivel w/ brake	Polyolefin Wheel	190°	700	3" x 3"
y.	C500	6" x 2"	Plate	Rigid	Polyolefin Wheel	190°	700	3" x 3"
z.	C510	6" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"
A.	C511	6" x 2"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"
B.	C513	6" x 2"	Plate	Swivel	TPR "Softie" A70	150°	800	3" x 3"
C.	C514	6" x 2"	Plate	Rigid	TPR "Softie" A70	150°	800	3" x 3"
D.	C517	6" x 2"	Plate	Swivel w/ brake	TPR "Softie" A70	150°	800	3" x 3"
E.	C518	6" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"
F.	C421	8" x 2"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"
G.	C526	8" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"
H.	C527	8" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	185°	800	3" x 3"
I.	C548	8" x 2"	Plate	Rigid	Metal Hub, Carefree	140°	300	3" x 3"
J.	C559	10" x 3½"	Axle	Flat Free	Steel Hub, Non-scuff Polyurethane	N/A	400	⅝" DIA
K.	C560	10" x 3½"	Axle	Pneumatic	Steel Hub / 4-ply Rubber	N/A	400	⅝" DIA