



Model:

- □ CIM1126
- □ CIM1125



Features and Benefits

- 22.25" (565 mm) wide space-saving design.
- Produces up to 1,035 lbs (439 kg) of ice per day.
- · Energy and Environment
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies. allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- Universal Smart Harness[™] control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

Ice Form

Bin Chart Kits for Combining Wider Bins with Smaller Models

FULL CUBE DIMENSIONS						
W x D x H (in.)	7/8 x 7/8 x 7/8					
W x D x H (mm) 22 x 22 x 22						
HALF CUBE DIMENSIONS						
W x D x H (in.)	3/8 x 7/8 x 7/8					
W x D x H (mm)	10 x 22 x 22					



V V	
65	
CII	RF

	ICE STORAGE BINS										
	Model No. Capacity Width	B25 242 lbs (110 kg) 30 in (762 mm)	B40 344 lbs (156 kg) 30 in (762 mm)	B42 351 lbs (160 kg) 22 in (559 mm)	B55 510 lbs (232 kg) 30 in (762 mm)	B700 680 lbs (308 kg) 30 in (762 mm)	B110 854 lbs (388 kg) 48 in (1,219 mm)	B1000 1,000 lbs (454 kg) 48 in (1,219 mm)	B1300 1,320 lbs (599 kg) 48 in (1,219 mm)	B1325 1,325 lbs (601 kg) 60 in (1,524 mm)	B1660 1,660 lbs (753 kg) 60 in (1524 mm)
Kits	CIM1126 KBT19		Kit Not	KBT19		N/A	Hold Down Securement				
			Required			NA	Recommer		nended		

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS						
Ice Machine Model	Manifold					
rec Placific Place	System	Replacement				
CIM1126	IFQ1	IOMQ (1)				
CIM1125	IFQ(I	10110(1)				

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.

















Ice Maker Warranty

COMMERCIAL WARRANTY					
Ice Maker	3 YEARS parts and labor				
Evaporator and Compressor	5 YEARS parts				
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor				

ELEVATION SERIES CUBE ICE MAKER CIM1126/1125



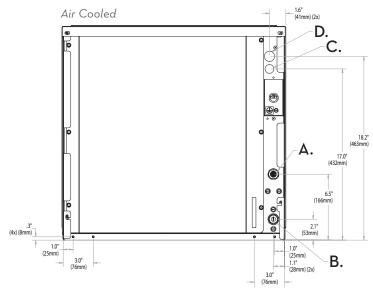

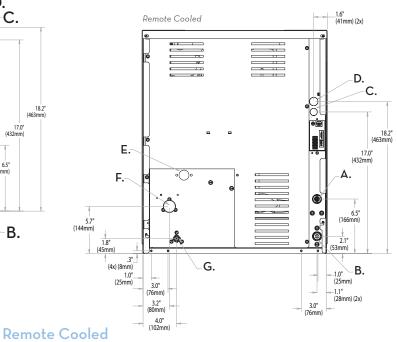

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

Dual Exhaust for Installation Flexibility

A. Ice maker potable water in, 3/8" FPT.

- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8" (remote).
- E. Condenser water in, 3/8" FPT (water only). Discharge line, 1/2" male quick connect coupling for precharged line set (remote only).
- F. Condenser water out, 1/2" FPT (water only).
- G. Liquid line, ³/₈" male quick connect for precharged line set (remote only).

Operating Requirements

	MINIMUM	MAXIMUM		
		60 Hz	50Hz	
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)	
Water Temp.	40°F (4.4°C)	100 1 (30 C)	110 1 (43 C)	
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG (5.5 BAR)		

Dimensions

ALL MODELS					
W x D x H (in.)	22.25 x 24.25 x 26.9				
W x D x H (mm)	565 x 616 x 683				

Specifications

			Cube duction 24hrs		Usage 00 lbs of Ice '0°F water	kWH Used						
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour		
CIM1126A	Air	932 (423)	762 (346)	19.0	10.0	10.0		5.1	208-230/60/1	12.2		18.200
CIM1126R**	Remote	968 (439)	855 (388)		N/A	5.0	200-230/00/1	12.8	20	10,200		
CIM1125A	Air	937 (425)	824 (374)	19.0	N/A	5.2	220-240/50/1	13.5	20	10.700		
CIM1125R**	Remote	1035 (469)	927 (420)	18.0		4.6	220-240/50/1	14.1		19,300		

^{*} Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the KCUBEDISPB MUST be used.

Notes:

Number of Wires: 3 (including ground)

CIM1126A 230 (105) • CIM1126R 215 (98) • CIM1125A 230 (105) • CIM1125R 215 (98) Approx. Shipping Weight lbs (kg): R404A

Refrigerant Type:

11100 E. 45th Avenue • Denver, CO 80239 • Phone: 1. 866. PURE. ICE • Fax: 303. 371. 6296 • www.iceomatic.com

Rev: 05/18 Part: Coo9

^{**} Remote models CIM1126R & CIM1125R require the RCA-2061 remote condenser with optional grill guard kit.