

CMP 250 Combi

D	Pan capacity	15 L
----------	--------------	------




Easy Plug

STAINLESS STEEL BELL



▶ Special catering model up to 73 L

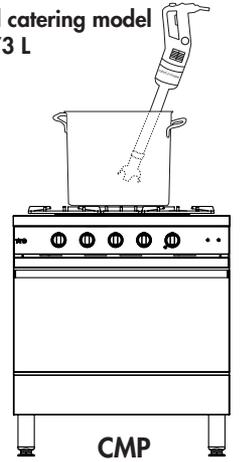

A SALES DESCRIPTION

Ideal for blending soups and pureeing fruit and vegetables. Special catering model. Compact, efficient and easy to handle.

B TECHNICAL DESCRIPTION

CMP 250 Combi Immersion Blenders. 120V/60/1. Power: 0.42 HP/310 W Variable speed from 2,300 to 9,600 rpm in mixer function and from 500 to 1,800 rpm in whisk function. 100% stainless-steel blades, bell and shaft (total length: 10" - 9" Whisk). "EasyPlug" system featuring detachable power cord.

C TECHNICAL CHARACTERISTICS

Effective output	0.42 HP/310 W
Electrical data	120V/60/1 2.3 A – plug supplied
Variable speed	2,300 to 10,000 rpm in mixer 500 to 1,800 rpm in whisk
Recyclability	95%
Net weight	13 lbs
Reference	CMP250COMBI

E CHARACTERISTICS AND BENEFITS

MOTOR UNIT

- Power 0.42 HP/310 W.
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness.
- Variable speed from 2,300 to 10,000 rpm in mixer function and from 500 to 1,800 rpm in whisk function.
- Self-regulating speed system.
- Variable speed for more elaborate tasks allowing for greater flexibility of use.
- New patented "EasyPlug" system making it easier to replace the power cord during after-sales servicing.
- Cord winding system for tidy storage and optimum lifespan.
- The indicator lights up when machine starts functioning and the cable is not damaged and correctly plugged in on both sides (wall socket and EasyPlug).

SHAFT, BELL AND WHISK

- 100% stainless-steel blades, bell and shaft (total length: 10").
- Foot with detachable bell and blades (patented system exclusive to Robot Coupe) for optimum sanitation.
- Whisk attachment equipped with metal gearbox even more resistant when processing thick preparations.

STANDARD ATTACHMENTS

- Wall-mounted Immersion Blenders holder.
- Tool for attaching and detaching the blade.

STANDARDS

ETL electrical and sanitation Listed/ cETL (Canada)



CMP 250 Combi

CMP 250 Combi

CMP 250 Combi

G

DRAWINGS & DIMENSIONS

120V/60/1 – power cord and plug supplied

