

Refrigerated Self-Service Case

- ☐ CO34R
- ☐ CO44R

Lengths include end panels
36-1/4"L x 33"D x 46-7/8"H
47-1/4"L x 33"D x 46-7/8"H



MODELS SHOWN: CO44R

STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- 4"D removable rear wall spacer (not included in depth dimension)
- 6' straight blade power cord (base exit)
- Blue Fin coated coil
- Compressor air front intake, rear discharge. Front panel cannot be blocked. Must remain 4" from wall
- Condensate pan (self-contained refrig. only)
- Exterior solid back panel, black
- Full end panel w/mirror interior (vinyl edge matches interior color)
- Integrated average product temperature of 40°F or less
- LED 3500K top light(s)
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel (includes lower front panel)
INTERIOR COLOR	☐ Black	☐ Stainless steel
LWR PERFORATED FRNT PANEL	☐ Painted - Black	☐ Stainless steel (w/stainless ext. only)
BASE	☐ Casters (n/a with remote)	☐ Levelers ☐ Seismic levelers (Q4695)
SHELVING	☐ None	☐ Metal shelf, non-lighted
ELECTRICAL CONNECT	☐ 6' straight blade power cord (self-cont.)	☐ 6' locking power cord (self-cont.) ☐ Electrical leads (remote)
REFRIGERATION	☐ Breeze™ w/EnergyWise s/c refrigeration	☐ Note: Remote doesn't incl Conds unit. Floor drain reqd. ☐ Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		☐ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		☐ 2"H Display risers for lower area (n/a w/shelf) ☐ Clean Sweep® coil cleaner (n/a w/remote) ☐ Night curtain, retractable, non-locking ☐ Solid security cover, removable, locking

Oasis®

Product Specifications



Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone Intended Product To Be Displayed

Warmest Avg Prod Temp ° F

PLAN VIEW

SIDE VIEW

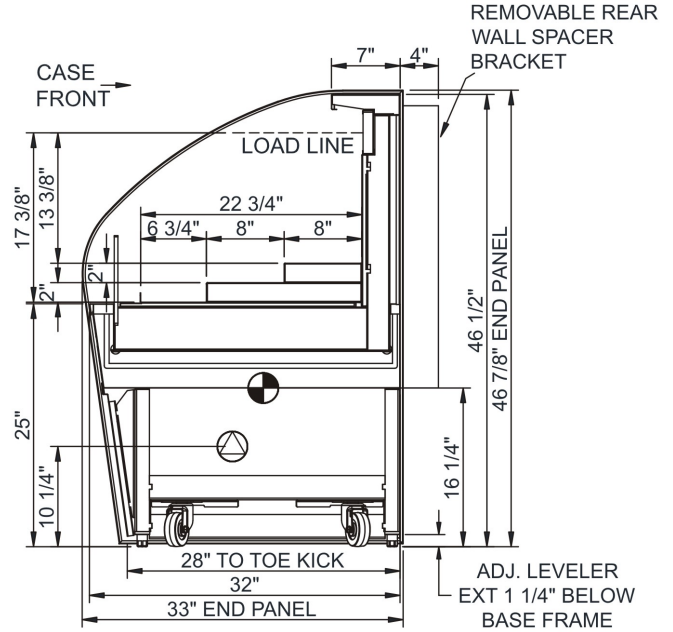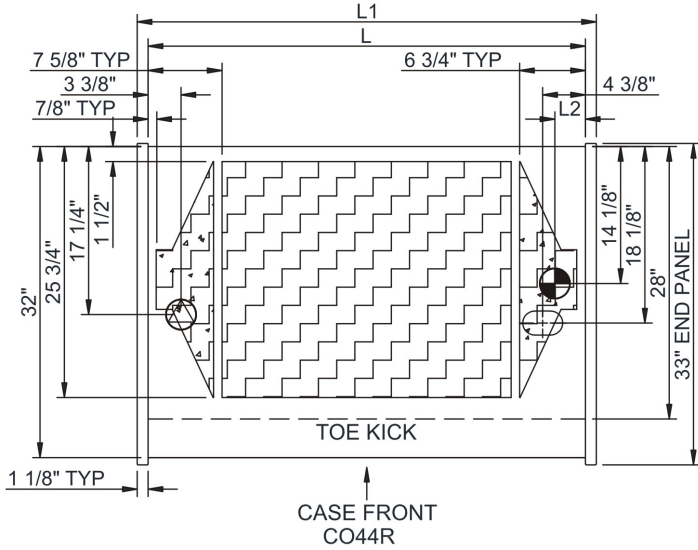

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 ● LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
 □ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

▨ SELF-CONTAINED CASE SERVICE ACCESS AREA.
 ▩ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
CO34R	N/A	36.25	3.13	Remote(Type I)	Circuit #1	110-120	1	60	0.74	48	2+G	Leads Multiple	20.00	1927	1784	600
				Self-Contained	Circuit #1	110-120	1	60	5.80	311	N/A	5-15P or L5-15P	N/A	N/A	N/A	
CO44R	N/A	47.25	3.13	Remote(Type I)	Circuit #1	110-120	1	60	0.86	56	2+G	Leads Multiple	20.00	2484	2300	650
				Self-Contained	Circuit #1	110-120	1	60	5.80	311	2+G	5-20P or L5-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Important Notes:

- ELECTRICAL NOTE:** If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- ⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

888 E. Porter Rd.
 Muskegon, MI 49441
 Ph. 231-798-8888
 Fx. 231-798-4960
www.structuralconcepts.com

Note: Information is subject to change at any time.
 Visit www.structuralconcepts.com for the most current specs.

Revised 12/10/2019

20030460

