DESIGNER LINE REFRIGERATOR

Model: D3RENHD


Natural Refrigerant R-290 Model



3-Section Extra-Wide Reach-In Refrigerator with Half Doors

D3RENHD - Stainless steel front, aluminum end panels and interior D3RENSAHD - Stainless steel exterior, aluminum interior

D3RENSSHD - Stainless steel exterior and interior



Continental

Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Custom laminates
Add'l epoxy-coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Pan slide assemblies	Locking hasp (lock not included)
Wine rack	Stainless steel mesh cover
Casters	Coverless hinges

Consult factory for other model configurations, options and accessories.

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant1

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA
Net Capacity (cu. ft.)

Net Capacity (cu. ft.)	75 (2124 cu I)
Width, Overall (in.)	85 1/2 (2172 mm)

 Depth, Overall (in.) (incl. handles)
 35 3/8 (899 mm)

 Depth (in.) (less doors)
 32 (813 mm)

Depth (in.) (less doors) 32 (813 min)

Depth (in.) (doors open 90°) 58 (1473 mm)

Clear Door Width (in.) 21 7/8 (556 mm)

Clear Half Door Height (in.) 27 1/2 (699 mm)
Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm)

No. of Doors 6 No. of Shelves 9

Shelf Area (sq. ft.) 61.2 (5.7 sq m)

Tray Slide Capacity (per half section) 11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	9.2 (4.1)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (5295 cu I)
Weight Std - Crated (lbs.)	795 (361 kg)
Weight SS - Crated (lbs.)	915 (415 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

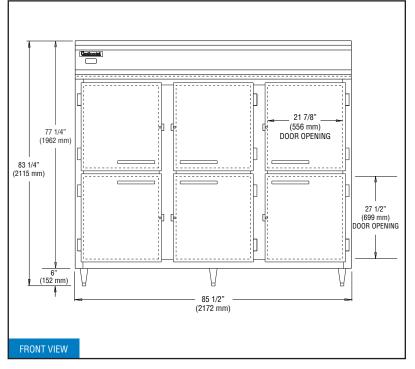

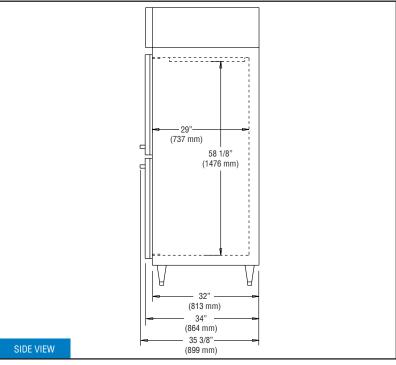

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.