

SIDE TO SIDE DOUBLE HOB

INDUCTION COOKTOP

NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING



HELIOS STANDARD, DROP-IN

TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

FEATURES

- 2500 and 3500 W models
- Available in 200–240 or 380–415 VAC, single or three phase
- Freestanding or drop-in design with stainless-steel housing
- Side-to-side orientation
- Sloped front panel supports a freestanding design and provides easy viewing and operation
- Helios Standard or Helios Touch display options for freestanding design
- High-quality internal electronics and heavy-gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic top
- 4.3-inch display
- Even heat distribution across the bottom of cookware*
- Temperature ranges from 85–425 °F (29–218 °C)
- Automatic pan detection provides instant energy transfer to cookware
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle maintain cooler, cleaner air intake
- Integral fan to keep internal components cool
- Microprocessors continuously monitor vital components for overheating, power-supply issues, and other conditions

STANDARD INCLUDED ACCESSORIES


- Two-year advanced replacement warranty (U.S. and Canada)
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- 6-ft (1.8 m) nominal plug and cord




*Induction cooking requires the use of induction-compatible (i.e., magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.


HELIOS
STANDARD
FREESTANDING

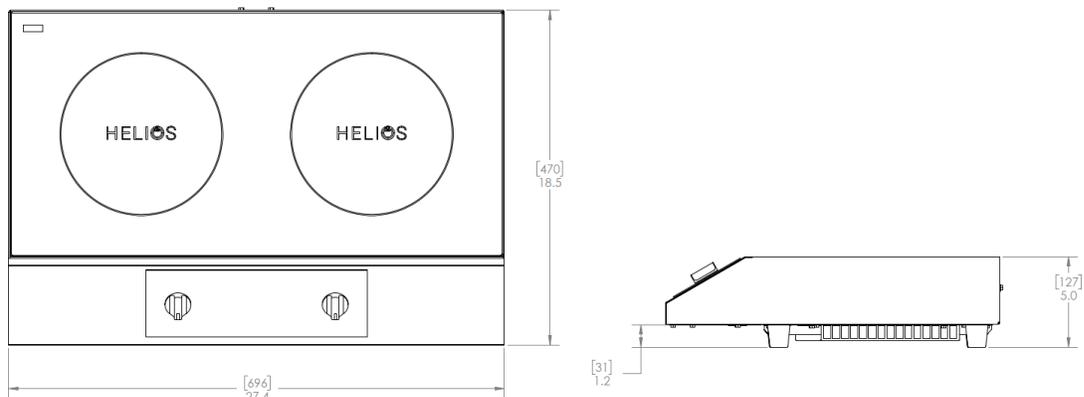

HELIOS
STANDARD
DROP-IN

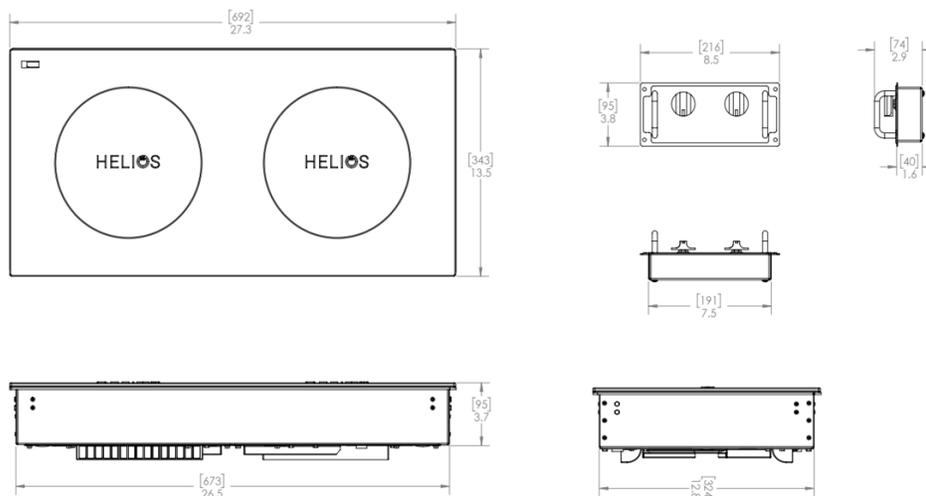

HELIOS TOUCH
FREESTANDING

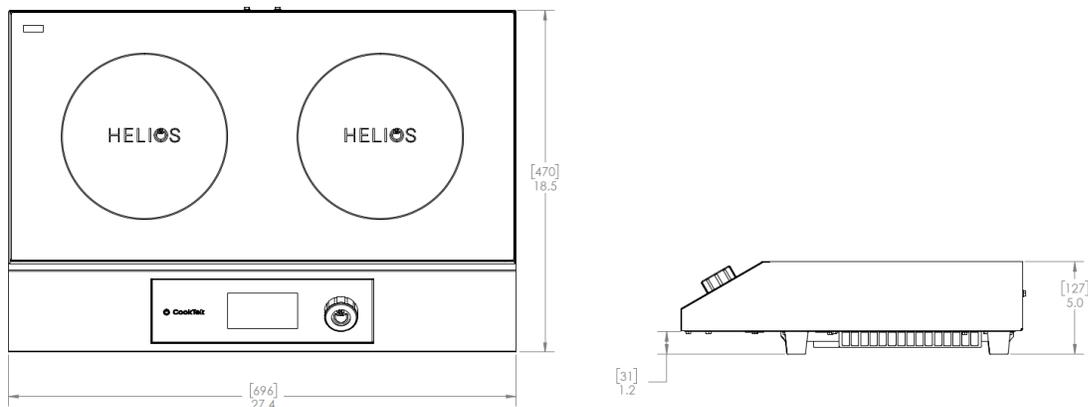

| DIMENSIONS - HELIOS STANDARD FREESTANDING | | |
|---|--------|--------|
| Full Unit Height | 5" | 127 mm |
| Full Unit Width | 27.4" | 696 mm |
| Full Unit Depth | 18.5" | 470 mm |
| Feet Height | 1.2" | 31 mm |
| Weight | 31 lb | 14 kg |
| Max Ambient Temperature | 122 °F | 50 °C |

| DIMENSIONS - HELIOS STANDARD DROP-IN | | |
|--------------------------------------|--------|---------|
| Full Unit Height | 3.7" | 95 mm |
| Full Unit Width | 27.3" | 692 mm |
| Housing Width | 26.5" | 673 mm |
| Full Unit Depth | 13.5" | 343 mm |
| Housing Depth | 12.8" | 324 mm |
| Cutout Width | 26.88" | 683 mm |
| Cutout Depth | 13.13" | 334 mm |
| Weight | 30 lb | 13.6 kg |
| Max Ambient Temperature | 122 °F | 50 °C |

| DIMENSIONS - HELIOS TOUCH FREESTANDING | | |
|--|--------|--------|
| Full Unit Height | 5" | 127 mm |
| Full Unit Width | 27.4" | 696 mm |
| Full Unit Depth | 18.5" | 470 mm |
| Feet Height | 1.2" | 31 mm |
| Weight | 31 lb | 14 kg |
| Max Ambient Temperature | 122 °F | 50 °C |

| WALL CLEARANCE* | | |
|-----------------|----|-------|
| Front | 2" | 51 mm |
| Sides | 2" | 51 mm |
| Rear | 2" | 51 mm |

*The clearances provided apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.



56PA332, 32 A, 250 V



IEC 309, 5-pin, 16 A



NEMA 6-30P



IEC 309, 3-Pin, 32 A, 240 V



IEC 309, 5-pin, 32 A



NEMA 6-50P

| SHIPPING INFORMATION | | |
|----------------------|-----------------|----------|
| Packaged Height | 11" | 279 mm |
| Packaged Width | 32" | 813 mm |
| Packaged Depth | 23" | 584 mm |
| Packaged Weight | 40 lb | 18.14 kg |
| Item Class | 250 NMFC #26710 | |

| ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD FREESTANDING | | |
|--|---------------------------------|----------------------|
| UNITED STATES/CANADA | | |
| HRF-9500-SS25-1 | 200–240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HRF-9500-SS35-1 | 200–240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| UK/MIDDLE EAST | | |
| HRF-9500-SS25-2 | 200–240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRF-9500-SS35-2 | 200–240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| INTERNATIONAL | | |
| HRF-9500-SS25-3 | 200–240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRF-9500-SS35-3 | 200–240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| AUSTRALIA | | |
| HRF-9500-SS25-4 | 200–240 VAC, 50/60 Hz, 2x2500 W | 56PA332, 32 A, 250 V |
| HRF-9500-SS35-4 | 200–240 VAC, 50/60 Hz, 2x3500 W | 56PA332, 32 A, 250 V |
| JAPAN | | |
| HRF-9500-SS25-6 | 200–240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HRF-9500-SS35-6 | 200–240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| SOUTH AFRICA | | |
| HRF-9500-SS25-7 | 200–240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRF-9500-SS35-7 | 200–240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| ISRAEL | | |
| HRF-9500-SS25-8 | 200–240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRF-9500-SS35-8 | 200–240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN | | |
|---|---------------------------------|----------------------|
| UNITED STATES/CANADA | | |
| HRD-9500-SS25-1 | 200–240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HRD-9500-SS35-1 | 200–240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| UK & SAUDI ARABIA | | |
| HRD-9500-SS25-2 | 200–240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRD-9500-SS35-2 | 200–240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN | | |
|---|---------------------------------|----------------------|
| INTERNATIONAL | | |
| HRD-9500-SS25-3 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRD-9500-SS35-3 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| AUSTRALIA | | |
| HRD-9500-SS25-4 | 200-240 VAC, 50/60 Hz, 2x2500 W | 56PA332, 32 A, 250 V |
| HRD-9500-SS35-4 | 200-240 VAC, 50/60 Hz, 2x3500 W | 56PA332, 32 A, 250 V |
| JAPAN | | |
| HRD-9500-SS25-6 | 200-240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HRD-9500-SS35-6 | 200-240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| SOUTH AFRICA | | |
| HRD-9500-SS25-7 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRD-9500-SS35-7 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| ISRAEL | | |
| HRD-9500-SS25-8 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HRD-9500-SS35-8 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS TOUCH FREESTANDING | | |
|---|---------------------------------|----------------------|
| UNITED STATES/CANADA | | |
| HTF-9500-SS25-1 | 200-240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HTF-9500-SS35-1 | 200-240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| UK & SAUDI ARABIA | | |
| HTF-9500-SS25-2 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HTF-9500-SS35-2 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| INTERNATIONAL | | |
| HTF-9500-SS25-3 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HTF-9500-SS35-3 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| AUSTRALIA | | |
| HTF-9500-SS25-4 | 200-240 VAC, 50/60 Hz, 2x2500 W | 56PA332, 32 A, 250 V |
| HTF-9500-SS35-4 | 200-240 VAC, 50/60 Hz, 2x3500 W | 56PA332, 32 A, 250 V |
| JAPAN | | |
| HTF-9500-SS25-6 | 200-240 VAC, 50/60 Hz, 2x2500 W | NEMA 6-30P |
| HTF-9500-SS35-6 | 200-240 VAC, 50/60 Hz, 2x3500 W | NEMA 6-50P |
| SOUTH AFRICA | | |
| HTF-9500-SS25-7 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |
| HTF-9500-SS35-7 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |
| ISRAEL | | |
| HTF-9500-SS25-8 | 200-240 VAC, 50/60 Hz, 2x2500 W | IEC 309, 3-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS TOUCH FREESTANDING | | |
|---|---------------------------------|----------------------|
| HTF-9500-SS35-8 | 200-240 VAC, 50/60 Hz, 2x3500 W | IEC 309, 3-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS THREE PHASE HELIOS STANDARD | | |
|--|---------------------------------|----------------------|
| UK & SAUDI ARABIA | | |
| HRF-9500-SS25-11 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 16 A |
| HRF-9500-SS35-11 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 32 A |
| INTERNATIONAL | | |
| HRF-9500-SS25-12 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 16 A |
| HRF-9500-SS35-12 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - THREE PHASE HELIOS STANDARD DROP-IN | | |
|--|---------------------------------|----------------------|
| UK & SAUDI ARABIA | | |
| HRD-9500-SS25-11 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 16 A |
| HRD-9500-SS35-11 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 32 A |
| INTERNATIONAL | | |
| HRD-9500-SS25-12 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 16 A |
| HRD-9500-SS35-12 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 32 A |

| ELECTRICAL SPECIFICATIONS - THREE PHASE HELIOS TOUCH FREESTANDING | | |
|--|---------------------------------|----------------------|
| UK & SAUDI ARABIA | | |
| HTF-9500-SS35-11 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 16 A |
| HTF-9500-SS25-11 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 32 A |
| INTERNATIONAL | | |
| HTF-9500-SS25-12 | 380-415 VAC, 50/60 Hz, 2X2500 W | IEC 309, 5-Pin, 16 A |
| HTF-9500-SS35-12 | 380-415 VAC, 50/60 Hz, 2X3500 W | IEC 309, 5-Pin, 32 A |

⚠️ Dedicated circuit required for each installation