


SURFACE PROBES


Suitable for measuring temperatures on a variety of surfaces. Griddles or grills should be checked frequently to ensure that proper cooking temperatures are maintained. Various types of equipment such as motors, pipes and plastic molds may also be monitored. Surface temperatures are the most difficult to measure accurately, especially on poor heat-conducting materials such as paper and some plastic films. It is not practical to estimate the temperature within a solid by measuring the surface temperature. The major source of error in reading surface temperature is obtaining adequate heat transfer from the surface into the measuring probe tip. To reduce this error: 1) use a small amount of oil or grease to improve heat transfer; 2) use a large contact area and 3) press the probe's tip's firmly against the measuring surface.

4005MK Pipe Clamp Probe

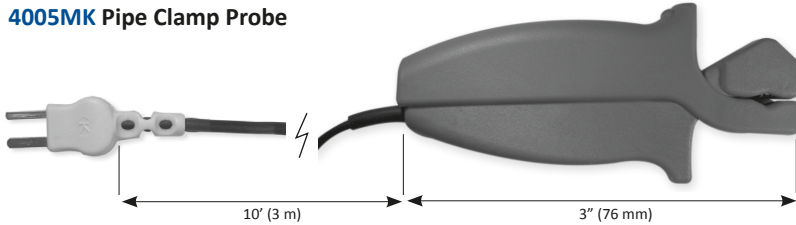


Temp. Range: -20° to 300°F (-29° to 149°C)
Max Tip Temp: 300°F (149°C)
Max Cable Temp: 200°F (93°C)
Response Time: 2 seconds, on pipe
Unit Weight: 7 oz (198 g)
[Thermoplastic Elastomer Straight Cable, for Pipe Dimension of .25" to 1.375"](#)

31907-K Surface Probe - Petite Handle

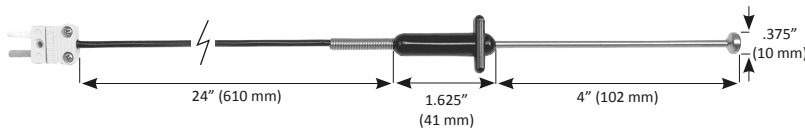


Temp. Range: -40° to 400°F (-40° to 205°C)
Max Tip/Cable Temp: 400°F (205°C)
Max Handle Temp: 300°F (149°C)
Response Time: 5 seconds, oiled surface
Unit Weight: 1 oz (28 g)
[Flexible Cable with Silicone Jacket](#)

50004-K Universal Holding Cabinet (UHC) Probe

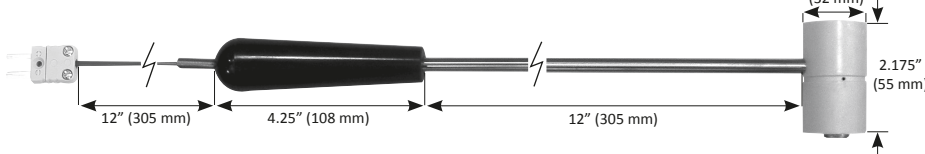

Temp. Range: -40° to 300°F (-40° to 149°C)
Max Tip Temp: 300°F (149°C)
Max Cord Temp: 400°F (205°C)
Response Time: 4 seconds on flat oiled surface
Unit Weight: 6 oz (170 g)
[FEP Outer Jacket](#)


50001 (J, K or T) Right Angle Bell Surface Probe

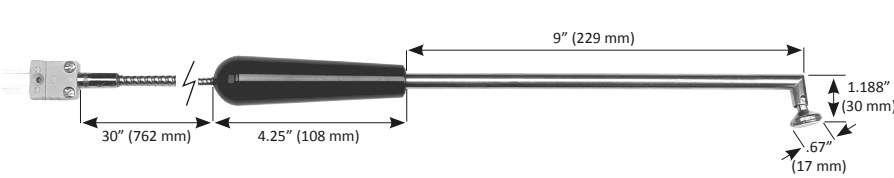

Temp. Range: -40° to 400°F (-40° to 205°C)
Max Tip/Cable Temp: 400°F (205°C)
Max Handle Temp: 325°F (163°C)
Response Time: 7 seconds, oiled surface
Unit Weight: 6 oz (170 g)
[Flexible Armored Cable](#)

Designed for use on any flat surface. Bell self-oriens to the surface, giving superior contact. Ideal for griddle and platens.

50008-K Silkscreen Probe

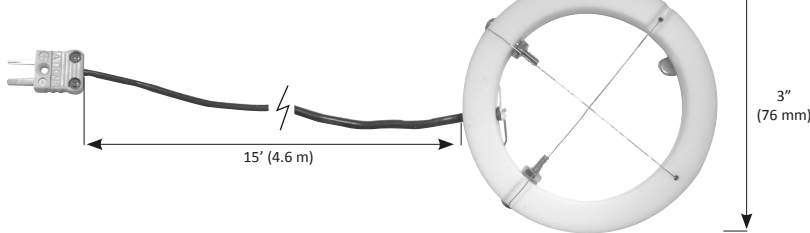


Temp. Range: -40° to 400°F (-40° to 205°C)
Max Tip/Cable Temp: 400°F (205°C)
Response Time: 1 second, in liquid
Unit Weight: 3 oz (85 g)
[Silicone Outer Jacket PTFE Ring](#)

Replacement wires, springs and sinkers sold separately (item 10830)

Designed to measure actual ink temperatures to profile dryers.


50010 (K or T) Tape Surface Probe

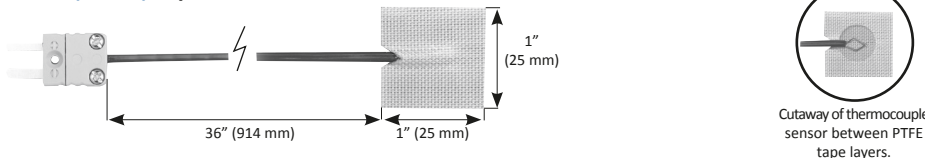

Temp. Range: -40° to 400°F (-40° to 205°C)
Max Tip/Cable Temp: 400°F (205°C)
Response Time: 9 seconds on metal surface
Unit Weight: 1 oz (28 g)
[Flexible Cable with FEP Jacket](#)








Can be placed between packs of food or cartons. Also suitable for platens.

50012 (J, K or T) 120° Angled Shaft Surface Bell Probe

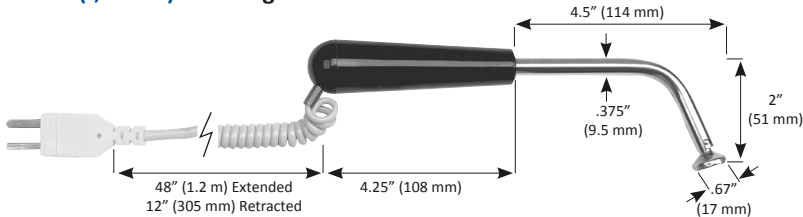

Temp. Range: -40° to 500°F (-40° to 260°C)
Max Tip Temp: 500°F (260°C)
Max Cable Temp: 176°F (80°C)
Max Handle Temp: 325°F (163°C)
Response Time: 4 seconds, oiled surface
Unit Weight: 5 oz (142 g)
[Coiled Retractable Cable](#)

Designed for use on any flat surface. Bell self-oriens to the surface, giving superior contact. Ideal for griddle and platens.
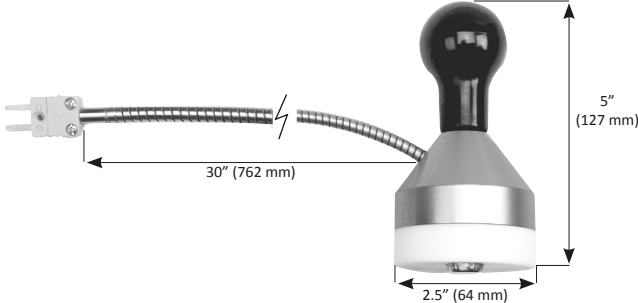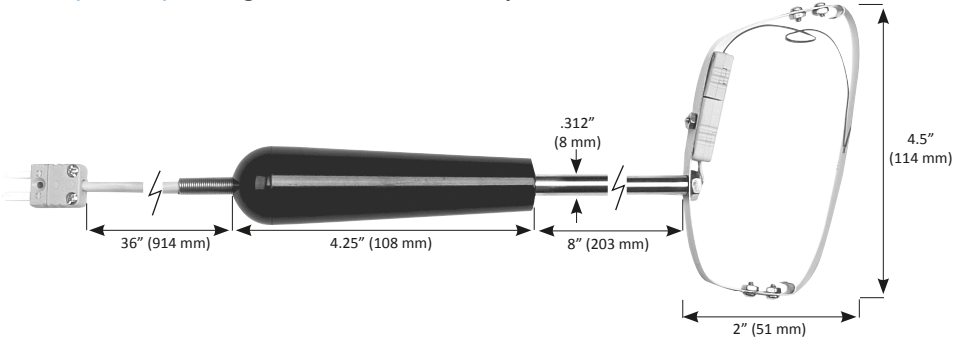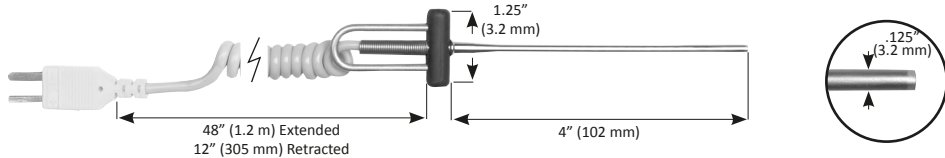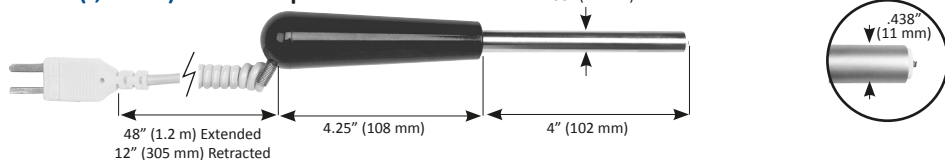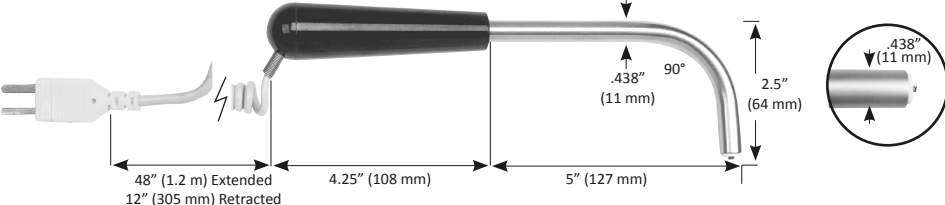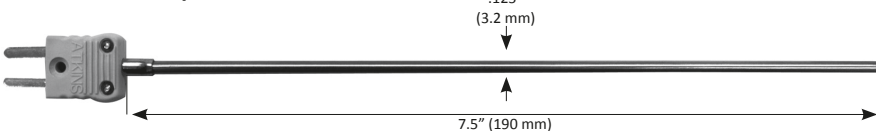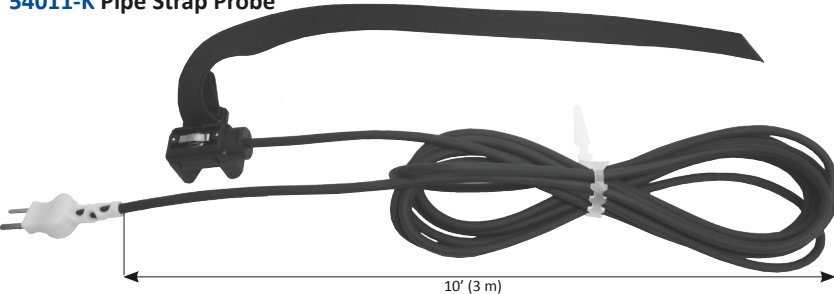
<p>50014 (J, K or T) Weighted Griddle Surface Probe</p> 	<p>Temp. Range: -40° to 500°F (-40° to 260°C) Max Tip Temp: 500°F (260°C) Max Cable Temp: 400°F (205°C) Max Handle Temp: 325°F (163°C) Response Time: 2 seconds, oiled surface Unit Weight: 2 lb (907 g) Flexible Armored Cable</p> <p>Weighted probe allows hands-free use.</p>
<p>50069 (J, K or T) Moving Surface Bow Probe - Replaceable Sensor</p> 	<p>Temp. Range: -40° to 500°F (-40° to 260°C) Max Tip Temp: 500°F (260°C) Max Cable Temp: 221°F (105°C) Max Handle Temp: 325°F (163°C) Response Time: 4 seconds, oiled surface</p> <p>Replaceable Sensor: MD3132-10 (Type K); MD3132-8 (Type J) MD3132-12 (Type T) Unit Weight: 6 oz (170 g) Flexible Cable with PVC Jacket</p> <p>Designed for moving surfaces and rollers. Gives a more accurate measurement on moving surfaces than a standard surface probe.</p>
<p>50316 (J, K or T) 1/8" Surface / Immersion Probe - Flat Tip</p> 	<p>Temp. Range: -100° to 500°F (-73° to 260°C) Max Tip Temp: 500°F (260°C) Max Cable Temp: 176°F (80°C) Max Handle Temp: 280°F (138°C) Response Time: 6 seconds, oiled metal surface; 1 second, liquid Unit Weight: 2 oz (57 g) Coiled Retractable Cable</p> <p>This probe has a flat tip for surface temperatures, but is also a very fast immersion probe.</p> <p>Note: Not recommended for use in highly acidic or alkaline products such as citrus and tomato products.</p>
<p>50318 (J, K or T) Ceramic Tip Surface Probe</p> 	<p>Temp. Range: -40° to 1202°F (-40° to 650°C) Max Tip Temp: 1202°F (650°C) Max Cable Temp: 176°F (80°C) Max Handle Temp: 325°F (163°C) Response Time: 1 second, oiled surface Unit Weight: 5 oz (141 g) Coiled Retractable Cable</p>
<p>50319 (J, K or T) Ceramic Tip Surface Probe - Right Angle</p> 	<p>Temp. Range: -40° to 1202°F (-40° to 650°C) Max Tip Temp: 1202°F (650°C) Max Cable Temp: 176°F (80°C) Max Handle Temp: 325°F (163°C) Response Time: 1 second, oiled surface Unit Weight: 6 oz (170 g) Coiled Retractable Cable</p>
<p>50405-K Blunt Tip Probe - Direct Connect</p> 	<p>Temp. Range: -100° to 500°F (-73° to 260°C) Max Tip Temp: 500°F (260°C) Response Time: 6 seconds, oiled surface; 1 second, liquid Unit Weight: .5 oz (14 g)</p>
<p>54011-K Pipe Strap Probe</p> 	<p>Temp. Range: -25° to 300°F (-32° to 149°C) Max Tip Temp: 300°F (149°C) Max Cable Temp: 220°F (104°C) Unit Weight: 2 oz (57 g) Cable Length: 10' (3 m) straight cord</p> <p>The special strap-hook design fits up to a 3.3" (84 mm) diameter pipe. Polyurethane Cable</p>