

JOB:	
ITEM NO:	

## CORRECTIONAL EXTRUDED SIDEWALL UTILITY RACK MODEL 252-1839-Z

### **FEATURES AND BENEFITS:**

- Durable heavy duty utility rack for transport and storage of products on 18" x 26" pans and plastic food boxes.
- Fully welded framework of structural aluminum extrusions. Additional extruded channels riveted and welded in place for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold pans on 1-1/2" centers. Sidewall panels are riveted and welded to posts.
- One piece aluminum base welded in place for extra strength.
- Inboard heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Other heavy duty utility rack models available.




252-1839-Z



# ACCESSORIES and OPTIONS (Available at extra cost):

- □ Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Various Caster Options

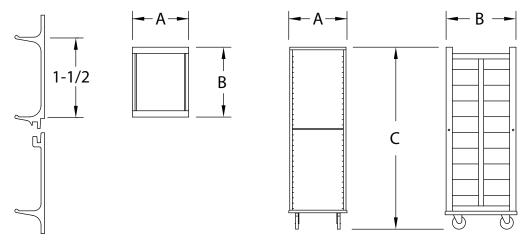

**DETAIL OF PAN SLIDE** 

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	<u> </u>	ACT.
252-1839-Z	39	18 X 26	IN	21-15/16	26-5/8	69-11/16	18-1/8	25-1/2	61-1/2	LBS	70
	39	460 X 660	MM	560	680	1770	460	650	160	KG	32

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

#### **RACK:**

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top bars: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie bars: Aluminum tubes welded to posts.
- · Sides: Interlocking extruded 6" panels, smooth outer sides. Reinforced horizontally and vertically with 1 x 2 x .125 extruded channel, riveted and welded in place.

#### **BASE**

- One piece construction, .190 aluminum.
- · Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp range -45/+180°F. Delrin bearings. Two casters equipped with brakes.

#### **PAN SLIDES:**

 Extruded interlocking side wall panels act as pan slides on 1-1/2" centers.