

**CORRECTIONAL
INSULATED HALF-SIZE
HOT CABINET
MODEL H-339-188-CZ
(FOR 18" X 26" PANS)**

FEATURES AND BENEFITS:

- Fully insulated Hi-Tensile aluminum half-size hot cabinet keeps prepared foods at serving temperatures. Ideal for transport.
- Powerful, yet efficient, 900 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F (93°C).
- Internal frame in body and door maintains structural rigidity.
- Field reversible insulated door prevents temperature loss. Standard with right hand hinging; left hand hinging available upon request.
- Safety conscious anti-microbial latch protects against spreading germs. Key locking latch for security.
- Latch and hinges mounted inboard.
- Channel pan supports for easy cleaning hold 18" x 26" pans on 2-3/4" centers.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Also available in stainless steel.
- Stainless steel and Lexan security panel protects controls.



H-339-188-CZ



NSF/ANSI 4




C US

**ACCESSORIES and OPTIONS
(Available at extra cost):**

- ☐ Pass-thru Version
- ☐ Corner Bumpers
- ☐ Perimeter Bumper
- ☐ Various Caster Options
- ☐ Digital Thermometer
- ☐ 240 Volt Service
- ☐ Stainless Steel Construction

See page B-20 for accessory details.

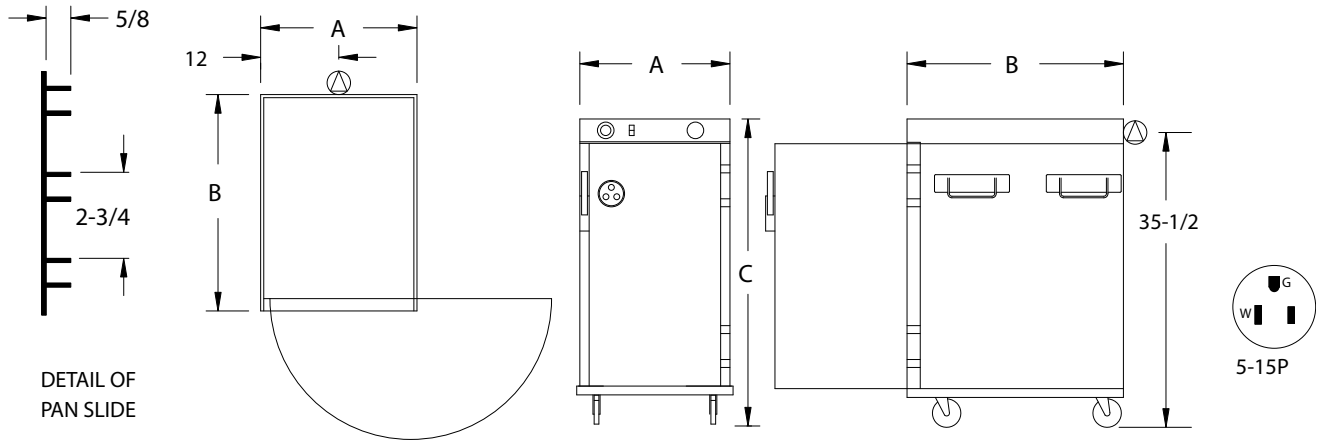

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
H-339-188-CZ	8	18 x 26	IN	23-7/8	32-1/4	36-11/16	18-3/16	26-1/4	24-7/8	LBS	139
		460 x 660	MM	610	820	935	465	670	635	KG	63

NOTE: When ordering bumpers, add 2" to overall dimensions.
ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.
ALL EXPOSED FASTENERS ARE TAMPER PROOF.

CABINET:

- Body: .063 aluminum.
- Reinforcement: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in walls; 1" in door, top and bottom.
- Pan stop channels: Mounted to inside rear of cabinet and door.
- Bail handles (4): Two mounted to each side.

BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOOR:

- Field reversible.
- Formed .063 aluminum.
- Latch: Anti-microbial chrome plated steel, magnetic type with key lock; mounted inboard.
- Hinges: 11 ga. stainless steel, butt type.
- Gasket: Perimeter type, neoprene.
- Vent.

PAN SLIDES:

- Flat wire racks, .104 x 5/8 nickel chrome plated steel, spaced on 2-3/4" centers.

SECURITY PANEL:

- 18 ga. stainless steel with 3/16" polycarbonate window.

ELECTRICAL COMPARTMENT:

- Cover: Formed .100 aluminum fastened to cabinet top.
- Control panel: Formed .063 aluminum; black front.
- Thermostat: Electro-mechanical, room ambient to 200°F (93°C).
- Switch: Lighted ON-OFF rocker type.
- Power cord: Permanent 6 ft., 14/3 ga. with molded plug.
- Heaters (3): 300 Watts each.
- Thermometer.

POWER REQUIREMENTS:

- 900 Watts, 120 Volts, 60 Hz., single phase, 7.5 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Correctional Half-Size Insulated Hot Cabinet Model H-339-188-CZ. Inner, outer and top liners of .063 aluminum, reinforced with channel frame. Security panel covers controls. Field reversible, formed .063 aluminum door. Fiberglass insulation in walls 1-1/2"; door, top and bottom 1". Welded and finished .190 aluminum base. (3) 300 Watt inner wall heaters, 120 Volts. Channel pan supports for (8) 18" x 26" pans. Anti-microbial, key lock latch. Two bail handles on each side. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 1 year parts warranty. Provide the following accessories: _____ . CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2010 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.