

## COOK-N-HOLD LOW TEMPERATURE SMOKER OVEN MODEL 767-CH-SK-D SERIES

### FEATURES AND BENEFITS:

- Fully insulated Cook-N-Hold smoker designed for flavorful results by slow cooking. Slow cooking means 15% to 20% less shrinkage. More product yield.
- Smokes with real wood chips. Cold smoke fish and cheese as well with Kold Keepers.
- Efficient 3000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 325° (163°C). Powerful 250 Watt cal rod heats chips quickly.
- Includes stainless steel vented chip box and variable one hour timer for mild to heavy smoke flavor.
- Standard solid state electronic control with large, clean, easy-to-read and operate LED digital display to ensure holding at precise food temperatures.
- Cook and hold up to 100 lbs. (45 kg.) of meat in less than 6 sq. ft. of floor space.
- Fully insulated, stainless steel interior and exterior for ease of cleaning. Smooth interior coved corners prevent food particle/grease buildup.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Field reversible insulated door prevents temperature loss. Silicone door gasket for proper seal. High temperature ceramic magnetic latch for "easy open" and security during transport.
- Safety conscious anti-microbial latch protect against spreading germs. Standard with right hand hinges; left hand hinging available upon request.
- Removable stainless steel pan slides have eleven positions on 1-3/8" centers. Supplied with 3 stainless steel wire grids.
- External drip pan on front keeps traffic area dry, safer.
- Heavy duty 3½" casters, two swivel with brakes; two rigid. Provides mobility when fully loaded.
- Ovens can be stacked for flexibility and increased capacity.
- Cres Cor recommends soaking wood chips for a minimum of 24 hours before usage.

### POWER UNIT OPTIONS:

3000 Watts, 208/240 Volts, 1 Phase, 60 Hz.

3000 Watts, 208/240 Volts, 3 Phase, 60 Hz.

2000 Watts, 120 Volts, 1 Phase, 60 Hz.

**Deluxe Models (-DX) have 18 factory or field programmed cook & hold cycles. Each programmed menu can be customized for exact time and temperature needs. Probe cooking includes one 6" meat temperature probe and port.**



767-CH-SK-DX

#### Standard (-DE)



All Ovens come standard with easy-to-read and operate LED digital controls.

#### Deluxe (-DX)



Deluxe Controls are available with 18 programmable menus and 6" meat probe.


### ACCESSORIES and OPTIONS (Available at extra cost):

- Deluxe version with 18 programmable menus and 6" meat probe (or optional 3" food probe).
- Kold Keeper
- Stacking Kit
- Tempered Glass Door Window
- Key Lock Latch
- Extra Wire Grids
- Perimeter & Corner Bumpers
- Various Caster Options
- 120 Volt Service
- Mobile Equipment Stand 24"

See page E-10 for accessory details.



# 767-CH-SK-D Series

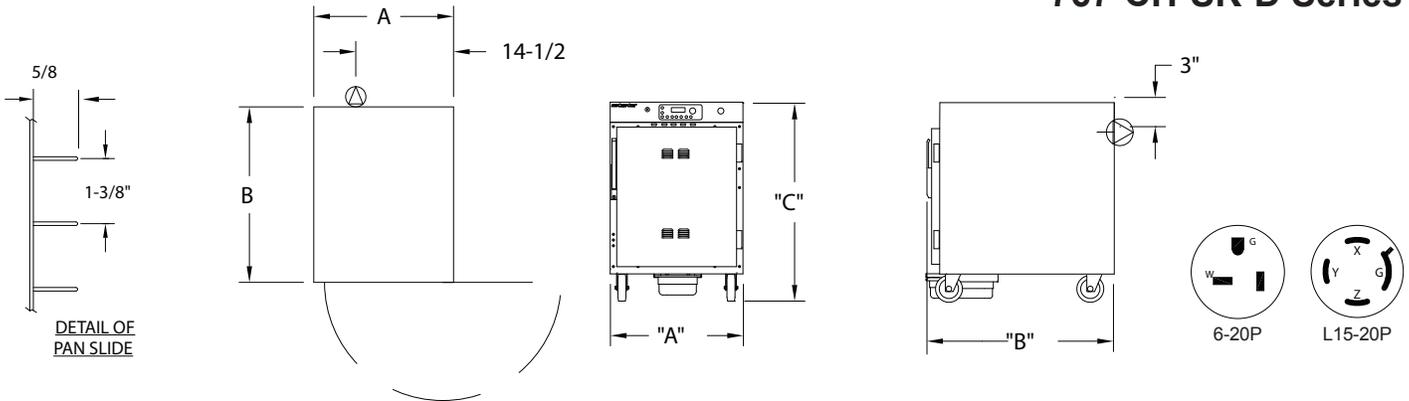

| CRES COR<br>MODEL NO. | PAN |                 | DIM "A"<br>WIDTH | DIM "B"<br>DEPTH | DIM "C"<br>HEIGHT | INSIDE DIMENSIONS |         |        | WEIGHT<br>ACT. |     |     |
|-----------------------|-----|-----------------|------------------|------------------|-------------------|-------------------|---------|--------|----------------|-----|-----|
|                       | CAP | SIZE            |                  |                  |                   | WIDTH             | DEPTH   | HEIGHT |                |     |     |
| 767-CH-SK-DE          | 9   | 12 X 20 X 2-1/2 | IN               | 25-5/8           | 32-3/4            | 32-1/4            | 21-3/16 | 27     | 17-1/2         | LBS | 205 |
| 767-CH-SK-DX          |     | 305 X 510 X 65  | MM               | 655              | 835               | 820               | 540     | 690    | 444            | KG  | 113 |
|                       | 6   | 12 x 20 x 4     | IN               |                  |                   |                   |         |        |                |     |     |
|                       |     | 305 x 510 x 105 | MM               |                  |                   |                   |         |        |                |     |     |
|                       | 4   | 12 x 20 x 6     | IN               |                  |                   |                   |         |        |                |     |     |
|                       |     | 305 x 510 x 155 | MM               |                  |                   |                   |         |        |                |     |     |
|                       | 5*  | 18 x 26 x 1     | IN               |                  |                   |                   |         |        |                |     |     |
|                       |     | 460 x 660 x 255 | MM               |                  |                   |                   |         |        |                |     |     |

\*Additional shelves required.

## CABINET:

- Body: 22 ga. stainless steel outer body.
- Inner body & top: 18 ga. stainless steel.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Wood chip box (removable): 18 ga. stainless steel; 3-5/8" L x 8" W x 2-1/4" H with 8" long handle; mounts on lower rear wall.
- Casters: 3-1/2" dia., modulus tires, 1-1/4" wide, load cap. 225 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front swivel casters equipped with brakes; rigid casters on rear.

## DOOR:

- Field reversible.
- Formed 20 ga. stainless steel.
- Latch: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges (2): Heavy duty chrome plated zinc; mounted inboard
- Gaskets: Perimeter type, silicone.
- Adjustable vents.

## PAN SLIDES (removable):

- 18 ga. stainless steel angles, 5/8 x 1; riveted on 1-3/8" centers.
- Grids: Stainless steel, 21 x 26; supplied with (3) grids.

## CLEARANCE REQUIREMENTS:

- 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

## POWER REQUIREMENTS:

- 3000/2650 Watts, 208/240 Volts, 60 Hz., 1 phase, 20 Amp. Service 14 Amps at 208 Volts, 13 Amps at 240 Volts.
- 3000/2650 Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 8 Amps at 208 Volts, 7 Amps at 240 Volts.
- 2000 Watts, 120 Volts, 60 Hz., 1 phase, 20 Amp.

## ELECTRICAL COMPARTMENT:

- Control panel: Formed stainless steel; black front.
- Thermostat (cook/hold): Solid state digital display control, 140°F (60°C) to 325°F (163°C).
- Switch: ON-OFF push button type.
- Power Cord: Permanent, 6 ft. with right angle plug.
- Three (3) heater circuits.
- One hour smoker timer with power light.
- Thermometer: Digital display.
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

## INSTALLATION REQUIREMENTS:

- This model complies with section 59 of UL710B for emissions of grease laden air, and according to UL is not required to be placed under a ventilation hood. Check local requirements before installation.

## SHORT FORM SPECIFICATIONS

Cres Cor Insulated Under Counter Smoker Oven Model 767-CH-SK-D; Solid state electronic controlled times and temperatures. Outer body of 22 ga. stainless steel; inner body and frame of 18 ga. stainless steel. Fiberglass insulation 1-1/2" in walls; 1" in door. Stainless steel internal frame; coved corners. Anti-microbial chrome plated latch. Three (3) heated inner walls. Smoker box and timer. Removable pan supports for (9) 12" x 20" x 2-1/2" pans spaced on 2-3/4" centers. Casters 3-1/2" modulus casters (2) swivel, (2) rigid, Delrin bearings. Load capacity 225 lbs. each. 2-Year Parts / 1-Year Labor warranty. Lifetime on heating elements (excluding labor). Provide the following accessories: \_\_\_\_\_ CSA Sanitation and safety certified US & CAN.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2016 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.