
APPLICATION:		PRODUCT NAME:
		EXPOSED PIPING REEL RINSE INSTALLATION KIT
JOB NAME:		SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS
QUANTITY:	ITEM NO.	MODEL:
		■ 29475
#14443 - VACUUM BREAKER		OPTIONS OR MODIFICATIONS:
2-1/2" [64mm] 5-5/8" [144mm] 4-1/8" [104mm] 3-3/8"		□ OTHER
		FEATURES
		KIT INCLUDES THE FOLLOWING
		#14443 - VACUUM BREAKER (QTY: 1)
		#2936-9000 - CHECK VALVE (QTY: 2)
		VACUUM BREAKER
		* ANTI-SPILL DESIGN
		* ASSE - 1056 APPROVED
ˈ [86mm] ˈ	1/2" NPT ─ FEMALE	CONTROL VALVE
	FEWALE	* INTERNAL SPRING LOADED CHECK VALVES
#17639 - CONTROL VALVE		* SWIVELLING SEAT DISKS
	4 (OIL NIDT	* RIGHT HAND SWIVEL STEM WITH CROSS HANDLES
— — — — — 1-5/8"	✓ 1/2" NPT ✓ FEMALE	* STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS
[41mm]		* STAINLESS STEEL SEAT SCREWS
	2-3/4" [70mm]	* BLUE AND RED INDEX BUTTONS INCLUDED
	N Jul.	CHECK VALVE


1/2" NPT FEMALE

#2936-9000 - CHECK VALVE



3-3/4" [95.75mm]

RECOMMENDED LAYOUT**

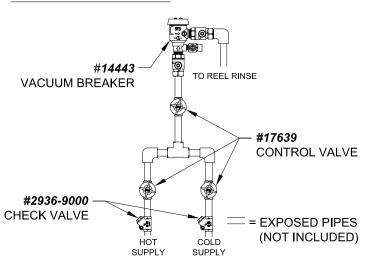

ANSI/A112.18.1M

* BRASS BODY

- * ALLOWS FLUID FLOW IN 1 DIRECTION ONLY

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 150 PSI MAX STATIC

SHIPPING WEIGHT

- * 7.5 LBS
- ** PIPES, ELBOWS AND TEES NOT INCLUDED

